
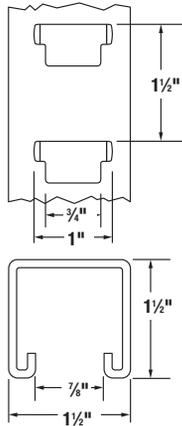


### Channels (continued)

#### B-904 Channel — 1½" x 1½"

Connection by means of continuous slot or T-slots on 1½" centers in base side of channel.


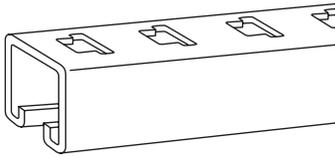


| CAT. NO. | DESCRIPTION           |
|----------|-----------------------|
| B-904 10 | 12 ga. Galv-Krom®     |
| B-904HD  | Hot-dipped galvanized |

For attachment to continuous slot use H-113-B bolts and B-910-1/2 steel nuts.

For attachment to T-slots use F-739 brackets 155#/C ft.

#### B-905HS Channel — 1½" x 1½"

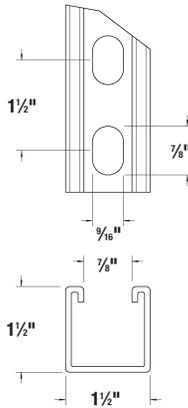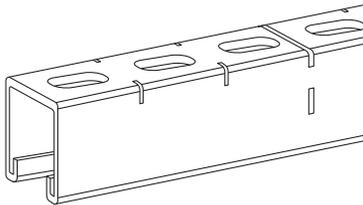

| CAT. NO.        | DESCRIPTION | MATERIAL |
|-----------------|-------------|----------|
| B 905HS 10      | Galv-Krom®  | 12 ga.   |
| B-905HS-20      | Galv-Krom®  | 12 ga.   |
| B-905HS-M-10    | Galv-Krom®  | 14 ga.   |
| B-905HS-M-20    | Galv-Krom®  | 14 ga.   |
| B-905HS-10-EG   | SilverGalv™ | 12 ga.   |
| B-905HS-20-EG   | SilverGalv™ | 12 ga.   |
| B-905HS-M-10-EG | SilverGalv™ | 14 ga.   |
| B-905HS-M-20-EG | SilverGalv™ | 14 ga.   |



Use H-113-B bolts and B-910-1/2 or B-911-1/2 steel nuts for mounting fittings.

Scribe marks designate midpoint between holes for accurate field cutting.

B-905, 158#/C ft. B-905-M, 102#/C ft.

#### B-905 Channel — 1½" x 1½"

Connections by means of continuous slot or ⅞" holes on 1½" centers that match holes in B-900 series fittings.

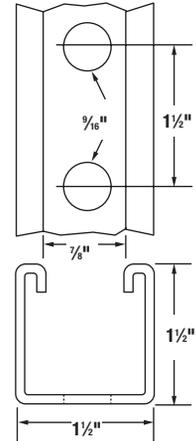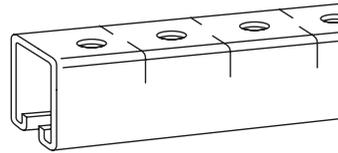

| CAT. NO.      | DESCRIPTION | MATERIAL |
|---------------|-------------|----------|
| B 905 10      | Galv-Krom®  | 12 ga.   |
| B-905-20      | Galv-Krom®  | 12 ga.   |
| B-905-M-10    | Galv-Krom®  | 14 ga.   |
| B-905-M-20    | Galv-Krom®  | 14 ga.   |
| B-905-10-EG   | SilverGalv™ | 12 ga.   |
| B-905-20-EG   | SilverGalv™ | 12 ga.   |
| B-905-M-10-EG | SilverGalv™ | 14 ga.   |
| B-905-M-20-EG | SilverGalv™ | 14 ga.   |

Use H-113-B bolts and B-910-1/2 or B-911-1/2 steel nuts for mounting fittings.

Scribe marks designate midpoint between holes for accurate field cutting.

B-905, 158#/C ft. B-905-M, 102#/C ft.

| CAT. NO.   | DESCRIPTION           | JOINER | END CAP |
|------------|-----------------------|--------|---------|
| B-905      | 12 ga. Galv-Krom®     | —      | —       |
| B-905-M    | 14 ga. Galv-Krom®     | —      | —       |
| B-905-10GR | Green coated          | —      | —       |
| B-905-20GR | Green coated          | —      | —       |
| B-905-10PG | Pre-galvanized        | —      | —       |
| B-905-20PG | Pre-galvanized        | —      | —       |
| B-905-10HD | Hot-dipped galvanized | —      | —       |
| B-905-20HD | Hot-dipped galvanized | —      | —       |

Use H-113-B bolts and B-910-1/2 or B-911-1/2 steel nuts for mounting fittings.

Scribe marks designate midpoint between holes for accurate field cutting.

B-905, 158#/C ft. B-905-M, 102#/C ft.