

Cordsets & Patchcords, AC Micro Style
PLTC, 18 & 22 AWG, Grey PVC




4-Pin AC Micro Cordset

Specifications


Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Epoxy-coated zinc
Housing Material	Molded oil-resistant PVC
Contact Material	Gold over nickel-plated brass
Cable Type	Oil-resistant grey PVC jacket, 18 or 22 AWG conductors, 300V UL Listed and CSA Certified
Bend Radius	10x diameter
Electrical	
Cable Rating	UL PLTC AWM Style 2661VW-1 105C 300V, CSA AWM A/B 1/11 80C 300V FT1, UV oil and water resistant
Assembly Rating	250V, 4 A
Environmental	
Enclosure Type Rating	IP67 & IP69K
Temperature Rating [C (F)]	-20...+105 ° (-4...+221 °)

Approximate Dimensions


Dimensions are in millimeters (inches). Illustrations are not drawn to scale.




Straight Female



Right Angle Female




Straight Male



Right Angle Male



Example of Cordset



Example of Cordset

Pinout and Color Code

Color Code	Face View Pinout							
	3-Pin		4-Pin		5-Pin		6-Pin	
	Female	Male	Female	Male	Female	Male	Female	Male
A	1 Green 2 Red/Black Tr 3 Red/White Tr		1 Red/Black Tr 2 Red/White Tr	3 Red 4 Green (GND)	1 Red/White Tr 2 Red 3 Green (GND)	4 Red/Yellow Tr 5 Red/Black Tr	1 Red/White Tr 2 Red 3 Green	4 Red/Yellow Tr 5 Red/Black Tr 6 Red/Blue Tr

Cordsets & Patchcords, AC Micro Style

20 AWG, Coil Cable, PVC



3-Pin AC Micro Cordset

Pinout and Color Code


Color Code	Face View Pinout	
	4-Pin	
	Female	Male
A	1 Black 2 Blue	3 Brown 4 White
B	1 Red/Black Tr. 2 Red/White Tr.	3 Red 4 Green (GND)

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Epoxy-coated zinc
Connector Material	Molded oil-resistant PVC
Contact Material	Gold over nickel-plated brass
Cable Type	Oil-resistant yellow PVC jacket, 20 AWG stranded copper, 300V, UL Recognized and CSA Certified
Cable Diameter [mm (in.)]	7.1 (0.28)
Electrical	
Cable Rating	300V, UL style 20197, CSA AWM 1/11 A/B
Assembly Rating	250V, 4 A
Environmental	
Enclosure Type Rating	IP67
Temperature Rating [C (F)]	-20...+105° (-4...+221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

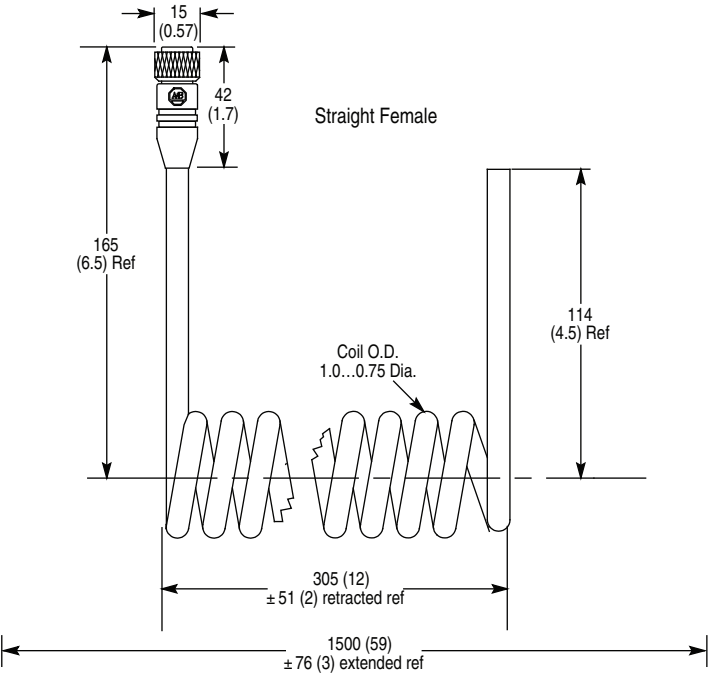

Patchcords, AC Micro to Mini and AC Micro to DC Micro Style

18 & 22 AWG, Yellow PVC




3-Pin AC Micro

Specifications

Certifications	UL Recognized and CSA Certified
Electrical	
Coupling Nut Material	Epoxy-coated zinc
Connector Material	Molded oil-resistant PVC
Contact Material	Gold over nickel-plated brass
Cable Rating	Unshielded, oil, water, and UV resistant, AWM, 18 AWG
Assembly Rating	250V, 4 A
Environmental	
Enclosure Type Rating	IP67
Temperature Rating [C (F)]	-20...+105° (-4...221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

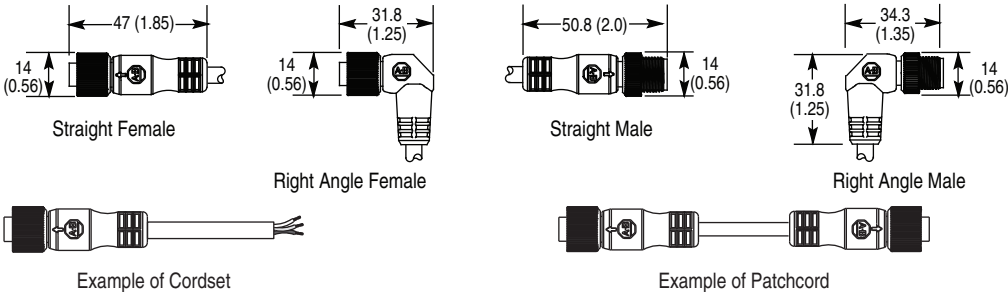

Pinout and Color Code

No. of Pins	Face View Pinout		
	3-Pin	3-Pin	4-Pin
Face View Pinout			
Color Code	A	B	C
	1 Green 2 Red/Black Tr. 3 Red/White Tr.	1 Green 2 Black 3 White	1 Brown 2 NA 3 Blue 4 Black

Splitters, AC Micro Style

MDSA Module Wiring




Splitter, AC Micro

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Material	Black PUR
Connector Insert Material	PUR
Receptacle Shell Material	Nickel-plated brass
Contact Material	Brass, gold over nickel plating
O-Ring Material	Viton®
Electrical	
Assembly Rating	300V, 3 A
Environmental	
Enclosure Type Rating	IP67; NEMA 6P
Operating Temperature [C (F)]	-30...+105° (-22...+221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

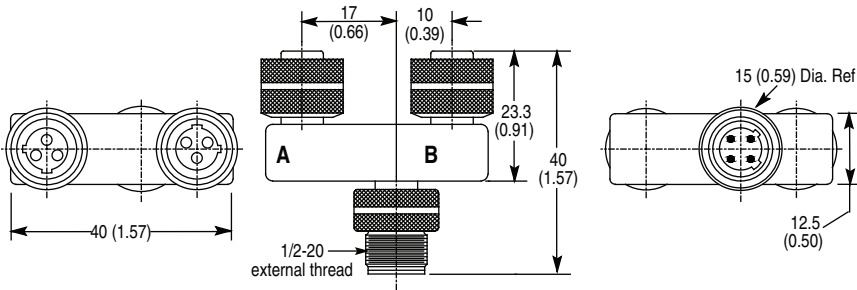

Pinout

Face View Pinout	
3-Pin	4-Pin



AC Micro Male Receptacle

Mating Components & Accessories

Description	Cat. No.
1/2 inch-14 NPT mounting nut★	889A-U1NUT-10
1/2 inch-14 NPT flat sealing washer★	889A-U1FSL-10


★ Sold in bags of 10.

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Receptacle Shell Material	Brass with nickel
Connector Insert Material	Nylon
Contact Material	Gold-plated brass
Wire Insulation	Oil-resistant PVC, 22 AWG stranded copper, 300V, UL Recognized and CSA Certified
Electrical	
Assembly Rating	250V, 4 A
Environmental	
Enclosure Type Rating	NEMA 1, 3, 4, 6P and IEC IP67, IP68, IP69K
Operating Temperature [C (F)]	-40...+105° (-22...+221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

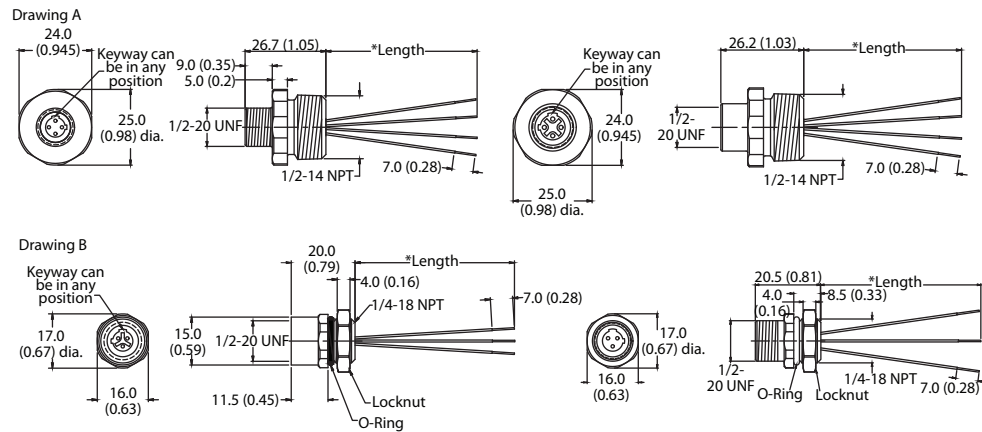

Pinout and Color Code

Color Code	Face View Pinout							
	3-Pin		4-Pin		5-Pin		6-Pin	
	Female	Male	Female	Male	Female	Male	Female	Male
A	1 Green 2 Red/Black Tr 3 Red/White Tr		1 Red/Black Tr 2 Red/White Tr	3 Red 4 Green (GND)	1 Red/White Tr 2 Red 3 Green (GND)	4 Red/Yellow Tr 5 Red/Black Tr	1 Red/White Tr 2 Red 3 Green	4 Red/Yellow Tr 5 Red/Black Tr 6 Red/Blue Tr

Terminal Chambers, AC Micro Style

Screw-type Field Attachable Connectors




AC Micro Male Receptacle

Specifications

Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Insert Material	Nylon
Contact Material	Gold-plated palladium/nickel
Wire Size	18 mm (0.75 in. ²) max.
Environmental	
Enclosure Type Rating	IP67 (IEC 529); NEMA 6P
Operating Temperature [C (F)]	-40...+90° (-40...+194°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

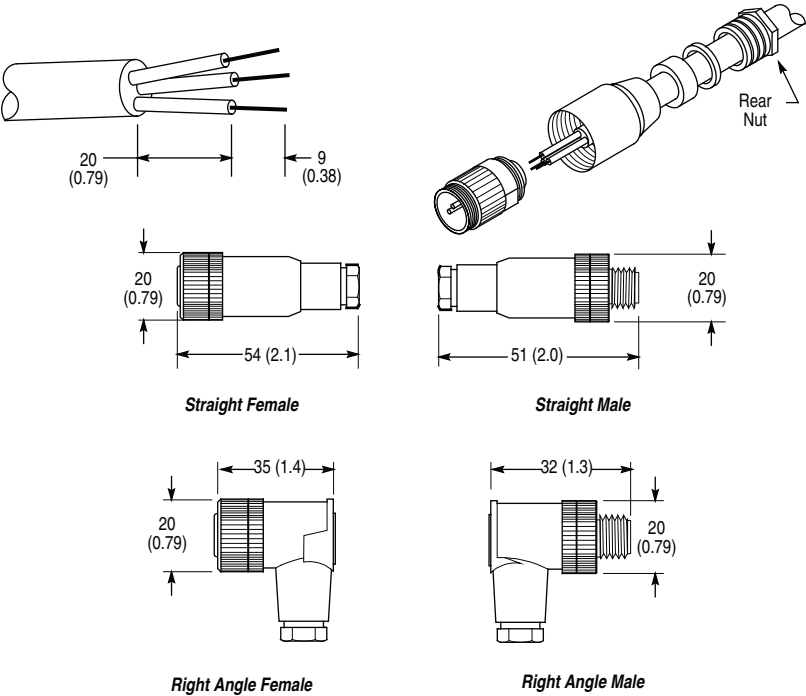


Pinout and Color Code

Face View Pinout	
3-Pin	
Color Code	Female
	Male
A	1 Green 2 Red/Black Tr 3 Red/White Tr



4-Pin EAC Micro Cordset

Pinout and Color Code


Color Code	Face View Pinout
	4-Pin Female
	
A	1 Brown 2 Blue 3 Not Used 4 Green/Yellow
B	1 Brown 2 Blue 3 Black 4 Green/Yellow

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Epoxy-coated zinc
Connector Material	Molded oil-resistant polyurethane body
Contact Material	Gold over nickel-plated brass
Cable Type	Yellow oil-resistant PVC jacket, 22 AWG conductors, 300V, UL Recognized and CSA Certified
Cable Diameter [mm (in.)]	5 (0.21)
Electrical	
Cable Rating	300V
Assembly Rating	300V, 3 A
Environmental	
Enclosure Type Rating	IP67
Temperature Rating [C (F)]	-40...+90° (-40...+194°)

Approximate Dimensions



Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

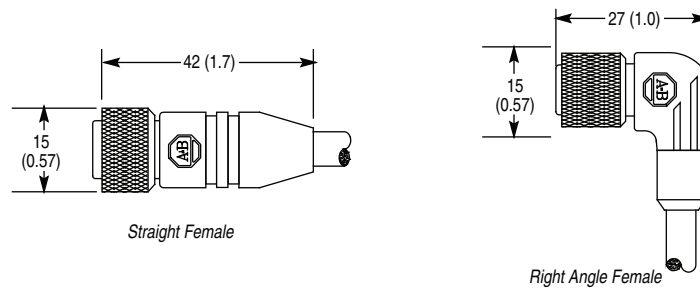

Receptacles, EAC Micro Style

22 AWG, M14 Mounting Threads

Typical Wiring Diagrams

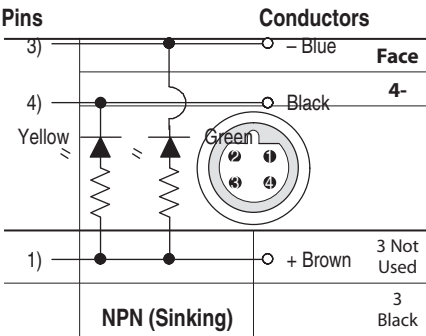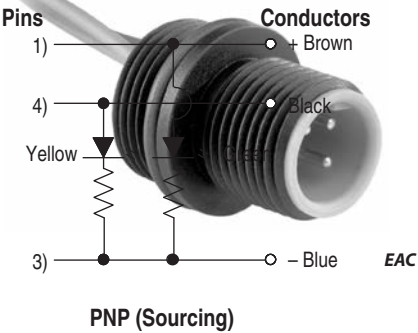


Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Receptacle Shell Material	Black anodized machined aluminum
Connector Insert Material	Nylon
Contact Material	Machined brass with gold over nickel plating
Electrical	
Assembly Rating	300V, 3 A
Environmental	
Enclosure Type Rating	IP67
Operating Temperature [C (F)]	-20...+105° (-4...+221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

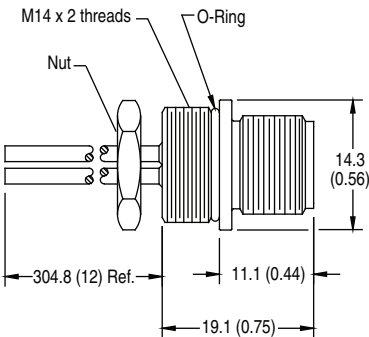


Cordsets & Patchcords, Pico Style

24 AWG, Yellow PVC or PUR, Screw-on, LED and NonLED




Pico Screw-On Style

Typical Wiring Diagrams

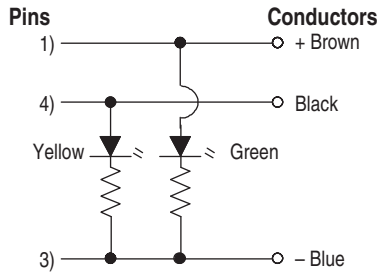

PNP (Sourcing)

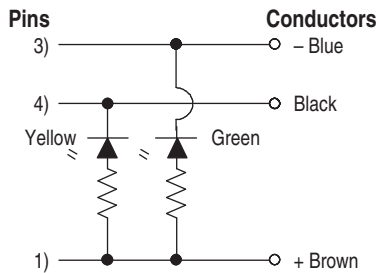



NPN (Sinking)

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Material	Molded oil-resistant PUR
Contact Material	Gold over nickel-plated brass
Cable Type	Oil-resistant yellow PVC or PUR jacket, 24 AWG conductors, 300V, UL Recognized, CSA Certified
Cable Diameter [mm (in.)]	3/c = 4.6 (0.18) 4/c = 4.6 (0.18)
Electrical	
Cable Rating	PVC: UL CM AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 105C 300V FT1; PUR: UL AWM style 20233 or 20549 80C 300V
Assembly Rating	NonLED: 60V AC/75V DC, 4 A; LED: 10...30V DC, 4 A
Environmental	
Enclosure Type Rating	Screw-type: IP67; Snap-on type: IP65
Temperature Rating [C (F)]	PVC and TPE models: -20...+105° (-4...+221°) PUR models: -20...+80° (-4...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

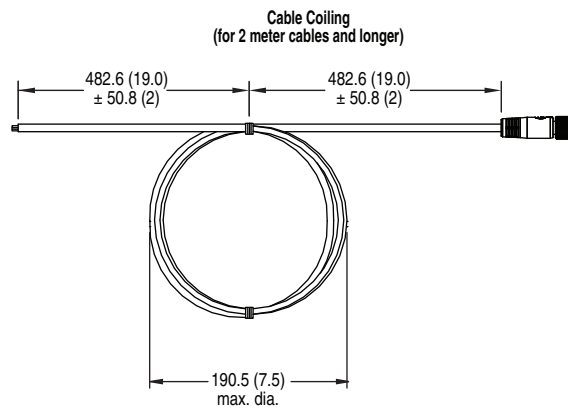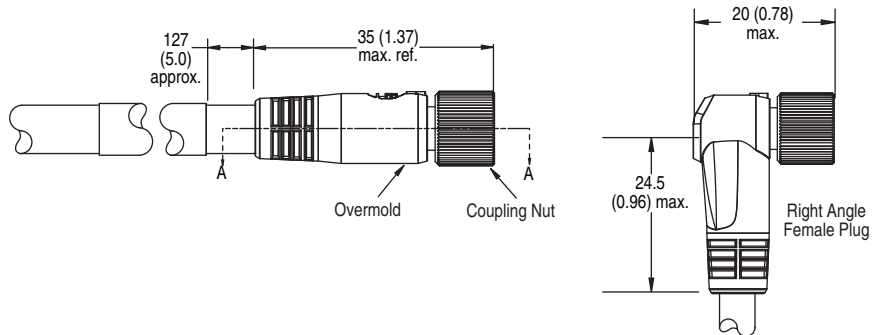

Pinout and Color Code

Color Code	Face View Pinout			
	3-Pin		4-Pin	
	Female	Male	Female	Male
A	1 Brown 2 Blue	4 Black	1 Brown 2 White	3 Blue 4 Black



Allen-Bradley


Cordsets & Patchcords, Pico Style

24 AWG, Yellow & Black PVC, TPE, PUR Screw-on




Pico Screw-On Style

Typical Wiring Diagrams

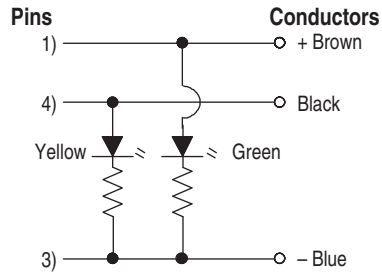

PNP (Sourcing)

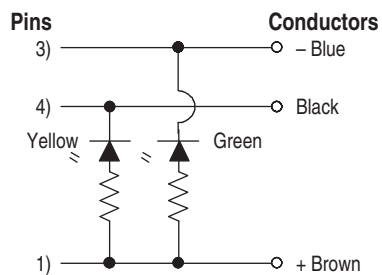



NPN (Sinking)

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Material	Molded oil-resistant PUR
Contact Material	Gold over nickel-plated brass
Cable Type	Oil-resistant yellow PVC or PUR jacket, 24 AWG conductors, 300V, UL Recognized, CSA Certified
Cable Diameter [mm (in.)]	3/c = 4.6 (0.18) 4/c = 4.6 (0.18)
Electrical	
Cable Rating	PVC: CM UL AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 105C 300V FT1; PUR: UL AWM style 20233 or 20549 80C 300V
Assembly Rating	NonLED: 60V AC/75V DC, 4 A; LED: 10...30V DC, 4 A
Environmental	
Enclosure Type Rating	Screw-type: IP67; Snap-on type: IP65
Temperature Rating [C (F)]	PVC and TPE models: -20...+105° (-4...+221°) PUR models: -20...+80° (-4...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

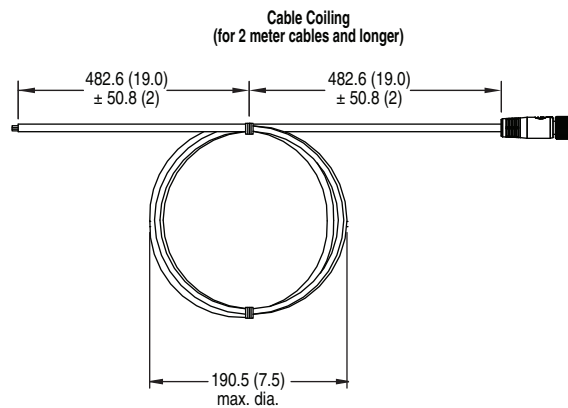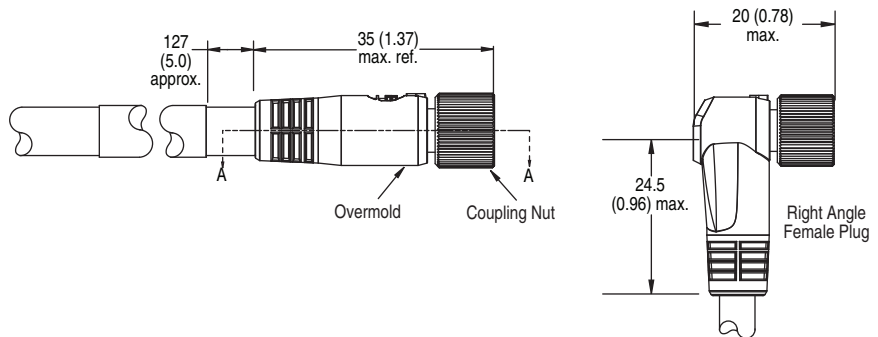

Pinout and Color Code

Color Code	Face View Pinout	
	3-Pin	4-Pin
A	1 Brown 2 NA 3 Blue 4 Black	—
B	—	1 Brown 2 White 3 Blue 4 Black


Cordsets & Patchcords, Pico Style

24 AWG, Yellow & Black PUR, PVC, TPE Snap-on




Pico Snap-On Style

Typical Wiring Diagrams

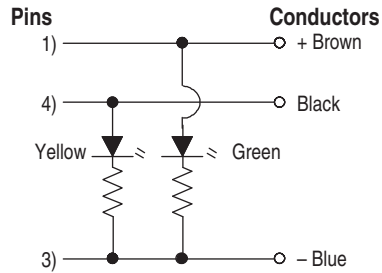

PNP (Sourcing)

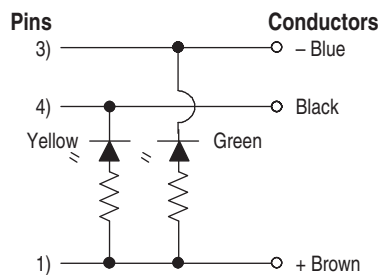


NPN (Sinking)

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Material	Molded oil-resistant PUR
Contact Material	Gold over nickel-plated brass
Cable Type	Oil-resistant yellow PVC or PUR jacket, 24 AWG conductors, 300V, UL Recognized, CSA Certified
Cable Diameter [mm (in.)]	3/c = 4.6 (0.18) 4/c = 4.6 (0.18)
Electrical	
Cable Rating	PVC: UL CM AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 105C 300V FT1; PUR: UL AWM style 20233 or 20549 80C 300V
Assembly Rating	NonLED: 60V AC/75V DC, 4 A; LED: 10...30V DC, 4 A
Environmental	
Enclosure Type Rating	Screw-type: IP67; Snap-on type: IP65
Temperature Rating [C (F)]	PVC and TPE models: -20...+105° (-4...+221°) PUR models: -20...+80° (-4...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

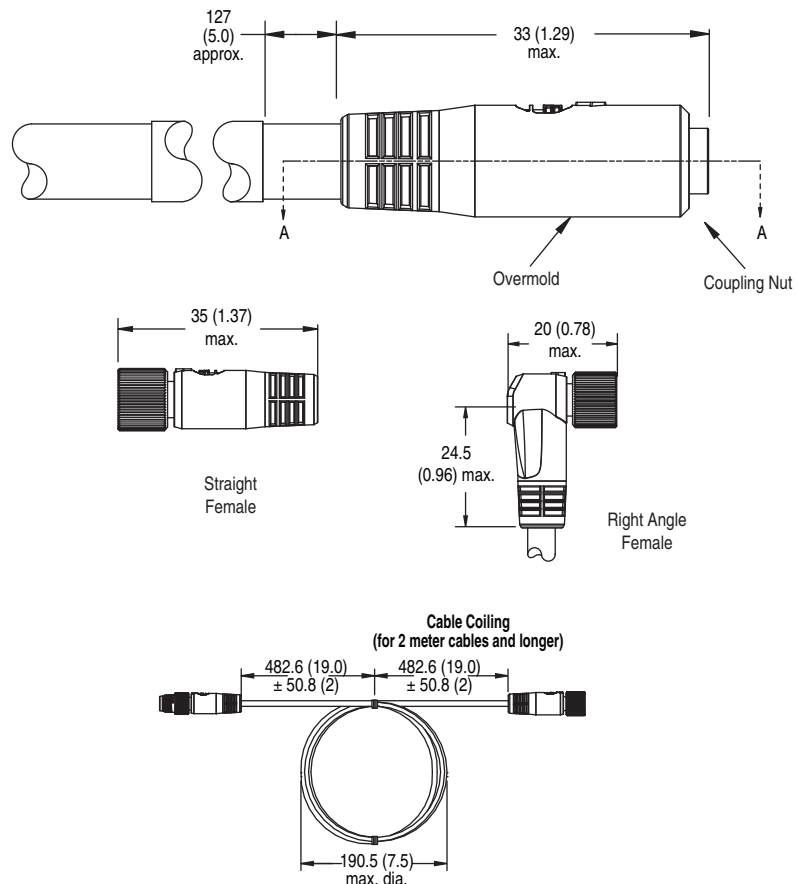

Pinout and Color Code

Color Code	Face View Pinout			
	3-Pin		4-Pin	
	Female	Male	Female	Male
A	1 Brown 2 Blue	4 Black	1 Brown 2 White	3 Blue 4 Black





Allen-Bradley

Cordsets & Patchcords, Pico Style

24 AWG, Pico LED and Pico to Micro LED, PUR, PVC, TPE





Typical Wiring Diagrams

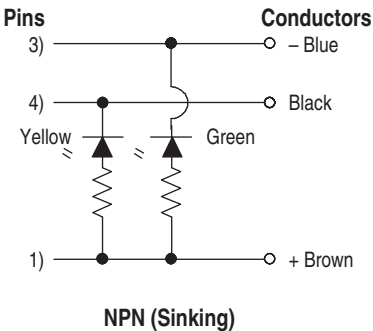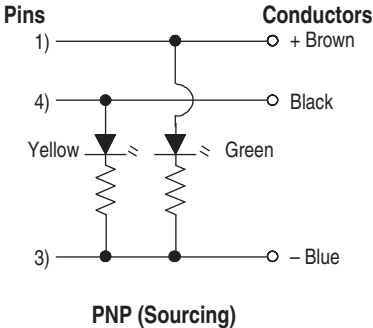

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Material	Molded, oil-resistant, PUR
Contact Material	Gold-plated brass
Cable Type	Oil-, water-, and UV-resistant, 24 AWG conductors, 300V, 4 A, AWM
Cable Diameter [mm (in.)]	3/c = 4.6 (0.18) 4/c = 4.6 (0.18)
Electrical	
Cable Rating	PVC: UL CM AWM style 2661 VW-1 105°C 300V, CSA AWM A/B I/II 105°C 300V FT1 PUR: UL AWM style 20233, 21198 or 10493 80°C 300V FT2 TPE: UL AWM style 20327 VW-1 105°C 300V FT1
Assembly Rating	NonLED: 60V AC/75V DC, 4 A LED: 10...30V DC, 4 A
Environmental	
Enclosure Type Rating	Screw-type: IP67 Snap-on type: IP65
Temperature Rating [C (F)]	PVC and TPE models: -20...+105° (-4...+221°) PUR models: -20...+80° (-4...+176°)

Pinout and Color Code

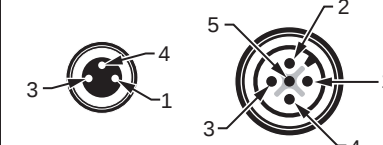
Color Code	Face View Pinout			
	3-Pin		4-Pin	
				
	Female	Male	Female	Male
	A 1 Brown 2 Blue	4 Black	1 Brown 2 White	3 Blue 4 Black

Cordsets & Patchcords, Pico Style

24 AWG, Pico LED and Pico to Micro LED, PUR, PVC, TPE

Approximate Dimensions


Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

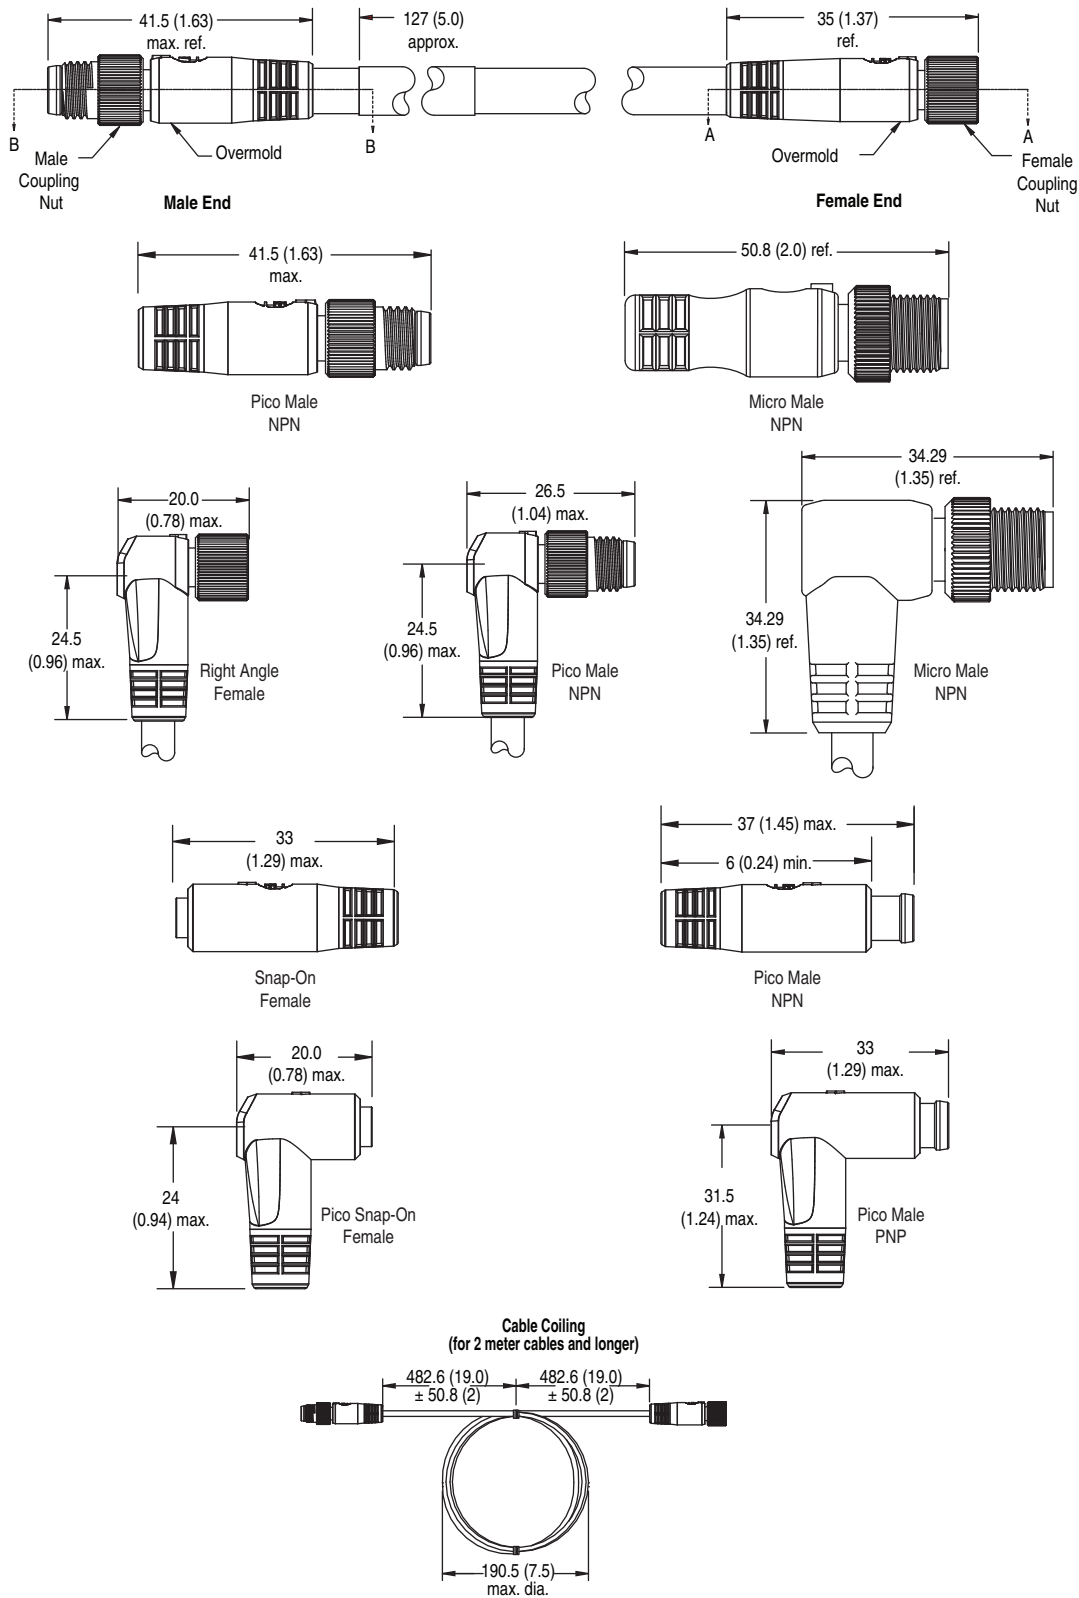


24 AWG, Pico to DC Micro, PVC




3-Pin Pico




4-Pin DC Micro



4-Pin Pico Female




4-Pin DC Micro Male



	Certifications	UL Recognized and CSA Certified
Mechanical		
	Coupling Nut Material	DC Micro: Black epoxy-coated zinc; Pico: Nickel-plated brass
	Connector Material	DC Micro: Molded oil-resistant PUR; Pico: Molded oil-resistant TPE
	Contact Material	Gold over nickel-plated brass
	Cable Type	Oil-resistant yellow PVC jacket, 24 AWG conductors, 300V, UL Recognized and CSA Certified
	Cable Diameter [mm (in.)]	3/c = 4.6 (0.18) 4/c = 4.6 (0.18)
Electrical		
	Cable Rating	UL CM AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 105C 300V FT1
	Assembly Rating	60V AC/75V DC, 4 A
Environmental		
	Enclosure Type Rating	Screw-type: IP67; Snap-on type: IP65
	Temperature Rating [C (F)]	PVC and TPE models: -20...+105 ° (-4...+221 °) PUR models: -20...+80 ° (-4...+176 °)

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

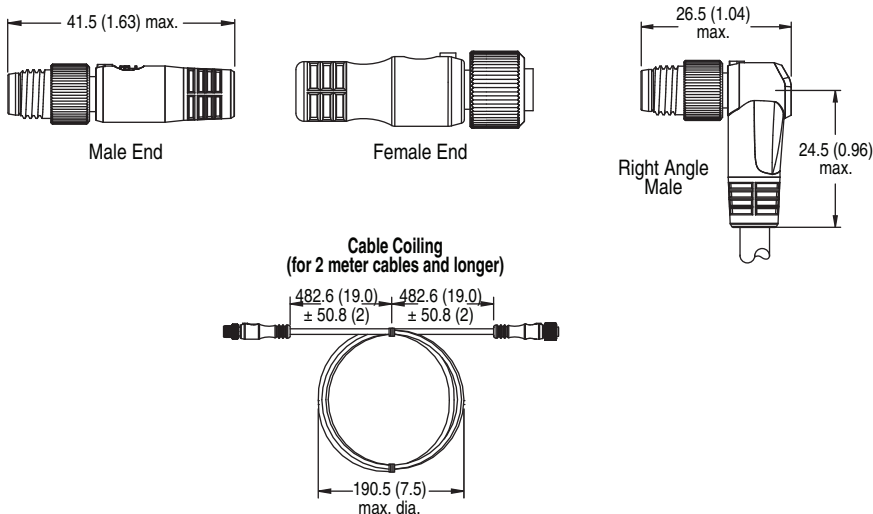


	Face View Pinout					
Pinout	A		B		C	
	Female	Male	Female	Male	Female	Male
	3-Pin Pico Female to 4-Pin DC Micro Male		4-Pin Pico Female to 4-Pin DC Micro Male		4-Pin DC Micro Female to 3-Pin Pico Male	



Pico V-Cables

Typical Wiring Diagrams




Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass (Pico); Epoxy-coated zinc (DC Micro)
Connector Material	Molded TPE
Contact Material	Gold over nickel-plated brass
Cable Type	Oil-resistant yellow PVC jacket, 24 AWG conductors, 300V, UL Recognized, CSA Certified
Bend Radius	10 x diameter
Cable Diameter [mm (in.)]	3/c = 4.3 (0.17) 4/c = 4.6 (0.18)
Electrical	
Cable Rating	UL CM AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 105C 300V FT1
Assembly Rating	NonLED: 60V AC/75V DC, 4 A; LED: 10...30V DC, 4 A
Environmental	
Enclosure Type Rating	IP67
Temperature Rating [C (F)]	PVC models: -20...+105° (-4...+221°) PUR models: -20...+80° (-4...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

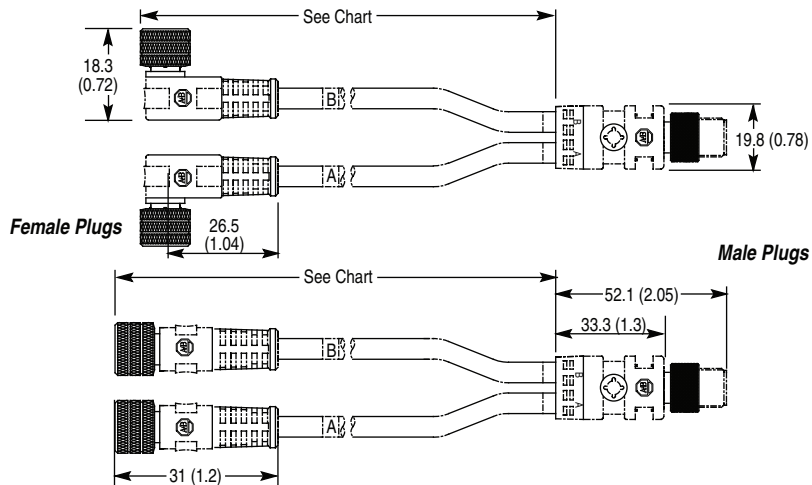

Pinout

Pinout	Face View Pinout					
	A			B		
	Female	Female	Male	Female	Female	Male
	3-Pin Pico Female to 4-Pin DC Micro Male			4-Pin Pico Female to 4-Pin DC Micro Male		

Splitters, Pico Style

Pico to Pico, DC Micro to Pico




Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Material	Black PUR
Connector Insert Material	PUR
Receptacle Shell Material	Nickel-plated brass
Contact Material	Gold-plated palladium/nickel
O-Ring Material	Viton®
Electrical	
Assembly Rating	60V AC/75V DC, 4 A
Environmental	
Enclosure Type Rating	IP67; NEMA 6P
Operating Temperature [C (F)]	-0...+85° (-32...+185°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

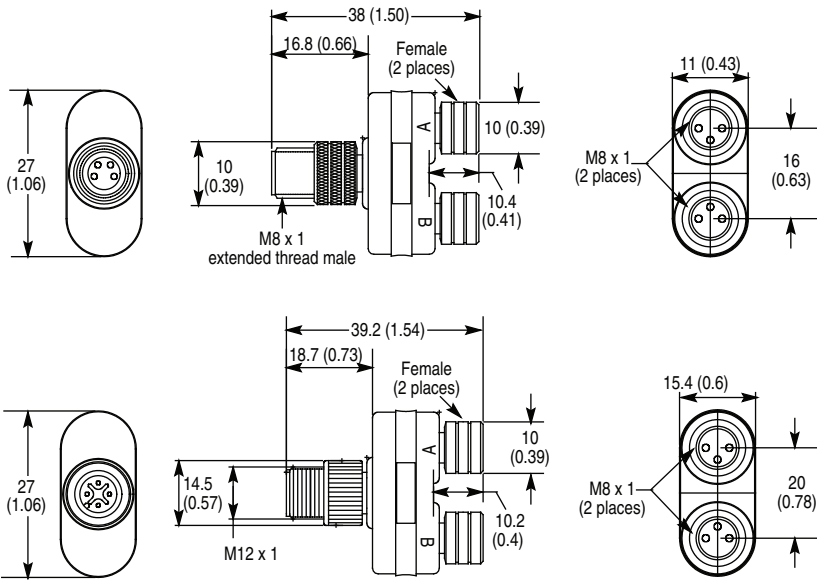

Pinout

	Face View Pinout					
Pinout	A			B		
						
	Female	Female	Male	Female	Female	Male
	3-Pin Pico Female to 4-Pin Pico Male			3-Pin Pico Female to 4-Pin DC Micro Male		




Pico Receptacles

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Receptacle Shell Material	Nickel-plated brass
Connector Insert Material	Nylon
Contact Material	Gold over nickel-plated brass
Electrical	
Assembly Rating	125V AC/DC, 4.0 A
Environmental	
Enclosure Type Rating	NEMA 1, 3, 4, 6P and IEC IP67, IP68, IP69K
Operating Temperature [C (F)]	-40...+105° (-22...+221°)
O-Ring Material	Nitrile rubber or Viton®

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

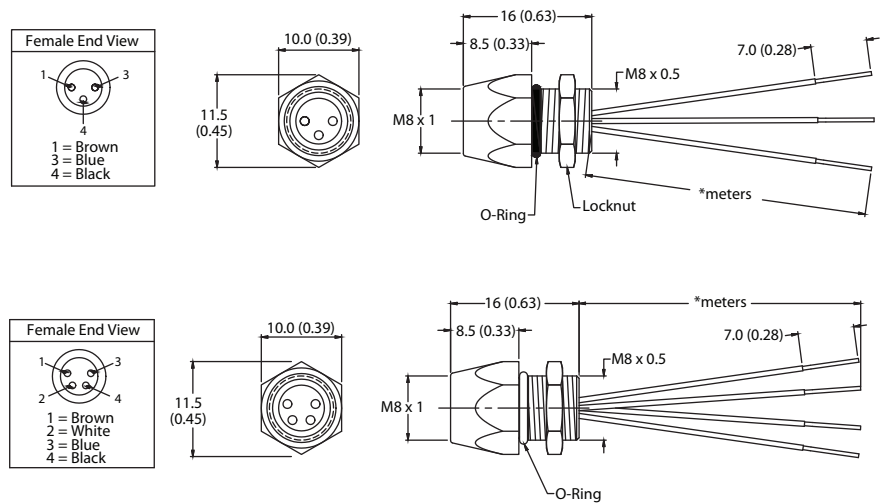

Pinout and Color Code

Color Code	Face View Pinout			
	3-Pin		4-Pin	
	Female	Male	Female	Male
A	1 Brown 3 Blue	4 Black	1 Brown 2 White	3 Blue 4 Black

Terminal Chambers, Pico Style

Screw Terminal Field Attachable Connectors




3-Pin Pico Female

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Shell Material	PBT
Contact Material	Gold-plated palladium nickel
Cable Type	20 AWG (0.5 mm ²) max.
Electrical	
Assembly Rating	3- or 4-pin: 60V, 4 A
Environmental	
Enclosure Type Rating	IP67
Operating Temperature [C (F)]	-40...+88° (-40...+185°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

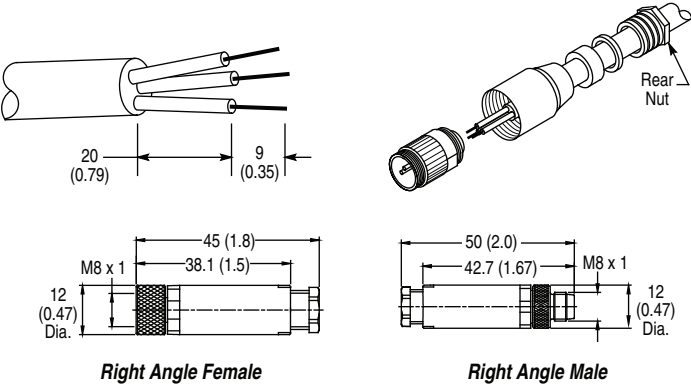

Pinout and Color Code

Color Code	Face View Pinout			
	3-Pin		4-Pin	
	Female	Male	Female	Male
A	1 Brown 3 Blue	4 Black	1 Brown 2 White	3 Blue 4 Black

Field Attachable, Pico Style Insulated Displacement Connector




Pico Style Male

Specifications

Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Shell Material	Nickel-plated brass
Connector Material	Hytrel Htr 8068
Field Contact Material	Gold-plated palladium nickel
IDC Installations, Max.	10
Cable Diameter	1.0...1.6 mm (0.04...0.063 in.)
Wire Size	22...26 AWG (min. individual strand size = 38 AWG)
Environmental	
Enclosure Type Rating	IP67; NEMA 6P
Operating Temperature [C (F)]	-25...+85° (-13...+185°)
Installation Temperature [C (F)]	-5...+50 (23...+122°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

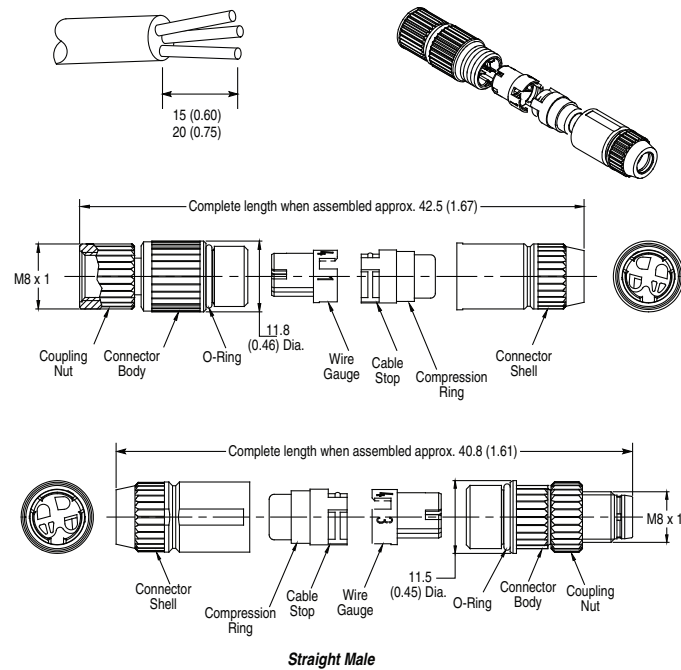

Straight Male

Pinout and Color Code

Color Code	Face View Pinout			
	3-Pin		4-Pin	
	Female	Male	Female	Male
A	1 Brown 3 Blue	4 Black	1 Brown 2 White	3 Blue 4 Black

Cordsets & Patchcords, M23 Style

18 or 18/22 AWG, Black or Yellow PVC




12-Pin M23 Cordset

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Material	Molded oil-resistant PUR
Contact Material	Gold over nickel-plated brass
Cable Type	9- & 12-conductor cables: oil-resistant PVC, yellow, PLTC, 300V, UL/CSA, 18 AWG 11-conductor cable: oil-resistant PUR, black, ITC/PLTC, 300V, UL/CSA (3) 18 AWG, (8) 22 AWG 19-conductor cable: oil-resistant PUR, black, ITC/PLTC, 300V, UL/CSA (3) 18 AWG, (16) 22 AWG
Bend Radius	10x diameter
Electrical	
Cable Rating	300V
Assembly Rating	9- & 12-pin: 6 A 11- & 19-conductor: 18 AWG-8 A, 22 AWG-2 A
Environmental	
Enclosure Type Rating	IP67, IP68
Temperature Rating [C (F)]	-20...+105° (-4...+221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

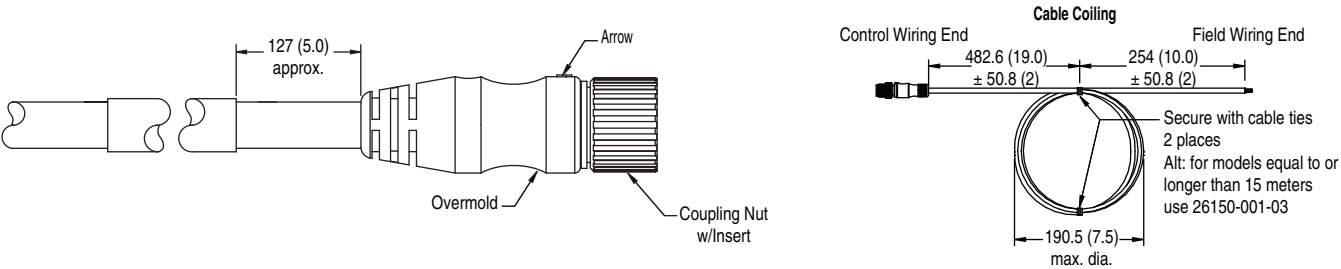

Pinout and Color Code

Color Code	Face View Pinout			
	12-Pin		19-Pin	
	Female	Male	Female	Male
A	9-Conductor		1 Violet	7 Grey/Pink
	1 Brown	5 NA	2 Red	8 White/Green
B	2 NA	6 Green	3 Grey	9 White/Yellow
	3 Blue	7 Yellow	4 Red/Blue	10 White/Grey
C	4 White	8 Grey	5 Green★	11 Black
		12 Green/Yellow	6 Blue★	12 Green/Yellow
A	11-Conductor (pins 9/10 jumpered)		13 Yellow/Brown	14 Brown/Green
	1 White	5 Pink	15 White	16 Yellow
B	2 Green	6 Red	17 Pink	18 Grey/Brown
	3 Yellow	7 Black	19 Brown★	
C	4 Grey	8 Violet	12 Green/Yellow★	
	12-Conductor			
A	1 Brown	5 Red	9 Black	
	2 Blue	6 Yellow	10 Violet	
B	3 Grey	7 White	11 Grey/Pink	
	4 Pink	8 Red/Blue	12 Green	

★ 18 AWG




12-Pin Male M23 Receptacle

Specifications

Mechanical	
Receptacle Shell Material	Nickel-plated brass
Connector Insert Material	Nylon or PBT/Grey
Contact Material	Machined brass with gold over nickel plating
Cable Type	Oil-resistant PVC, 18 AWG stranded copper, 300V, UL Recognized and CSA Certified
Electrical	
Assembly Rating	9-, 11-, 12-pin: 300V, 6 A 19-pin: 63V, 12 A
Environmental	
Enclosure Type Rating	IP67, NEMA 6P, 1200 psi (8270 kPa) washdown
Operating Temperature [C (F)]	-20...+105° (-4...+221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

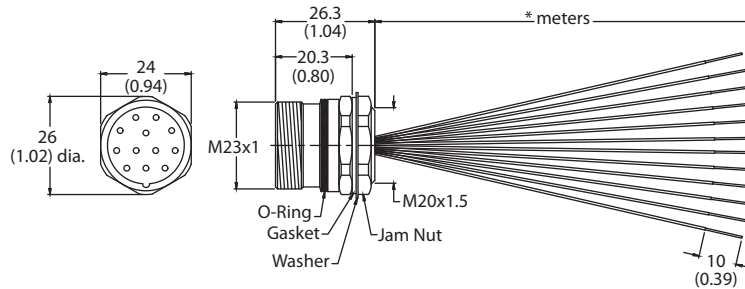

Pinout and Color Code

Color Code	Face View Pinout					
	9-, 11-, or 12-Pin			19-Pin		
A	9-Pin 1 Brown 5 NA 9 Pink 2 NA 6 Green 10 Red 3 Blue 7 Yellow 11 NA 4 Grey 8 Grey 12 Green/Yellow			1 Violet 7 Grey/Pink 13 Yellow/Brown 2 Red 8 White/Green 14 Brown/Green 3 Grey 9 White/Yellow 15 White 4 Red/Blue 10 White/Grey 16 Yellow 5 Green 11 Black 17 Pink 6 Blue 12 Green/Yellow 18 Grey/Brown 19 Brown		
	11-Pin (pins 9/10 jumpered) 1 White 5 Pink 9 N/C 2 Green 6 Red 10 Blue 3 Yellow 7 Black 11 Brown 4 Grey 8 Violet 12 Green/Yellow			—		
B	12-Pin 1 Brown 5 Red 9 Black 2 Blue 6 Yellow 10 Violet 3 Grey 7 White 11 Grey/Pink 4 Pink 8 Red/Blue 12 Green			—		
	12-Pin 1 Brown 5 Red 9 Black 2 Blue 6 Yellow 10 Violet 3 Grey 7 White 11 Grey/Pink 4 Pink 8 Red/Blue 12 Green			—		

Field Attachable, M23 Style

Solder Type




Field-Attachable M23 Connector

Specifications

Mechanical	
Coupling Nut Material	Nickel-plated brass
Connector Shell Material	Nickel-plated brass
Contact Material	Gold-plated palladium/nickel
Cable Diameter [mm (in.)]	10...14 (0.39...0.55)
Electrical	
Assembly Rating	63V, 12 A power, 3 A all others
Environmental	
Enclosure Type Rating	IP65
Operating Temperature [C (F)]	-20...+105° (-4...221°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

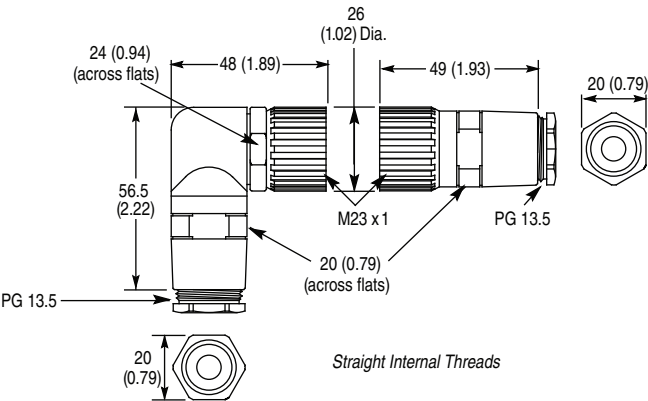

Pinout

Face View Pinout			
9-, 11-, or 12-Pin		19-Pin	
Female	Male	Female	Male




Valve A Cordset

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Housing Material	Molded oil-resistant PUR (NonLED version: black, LED version: clear)
Gasket Material	Nitrile
Contact Material	Tin-plated copper
Mounting Screw	18-8 Stainless Steel
Cable Type	Oil-resistant black PVC jacket, 18 AWG conductor, 300V, UL Recognized and CSA Certified
Home Run Connection	10x diameter, min.
Cable Diameter [mm (in.)]	18 AWG, 3-conductor: 5.5 (0.216), 4-conductor: 6 (0.235)
Electrical	
Cable Rating	UL AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 80C 300V FT1, UV oil and water resistant
Assembly Rating	Straight wired: 0...250V AC/DC, 10 A LED & Varistor surge suppression: 24V or 115V AC/DC, 10 A
Environmental	
Enclosure Type Rating	IP67, NEMA 6
Temperature Rating [C (F)]	-25...+80° (-13...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

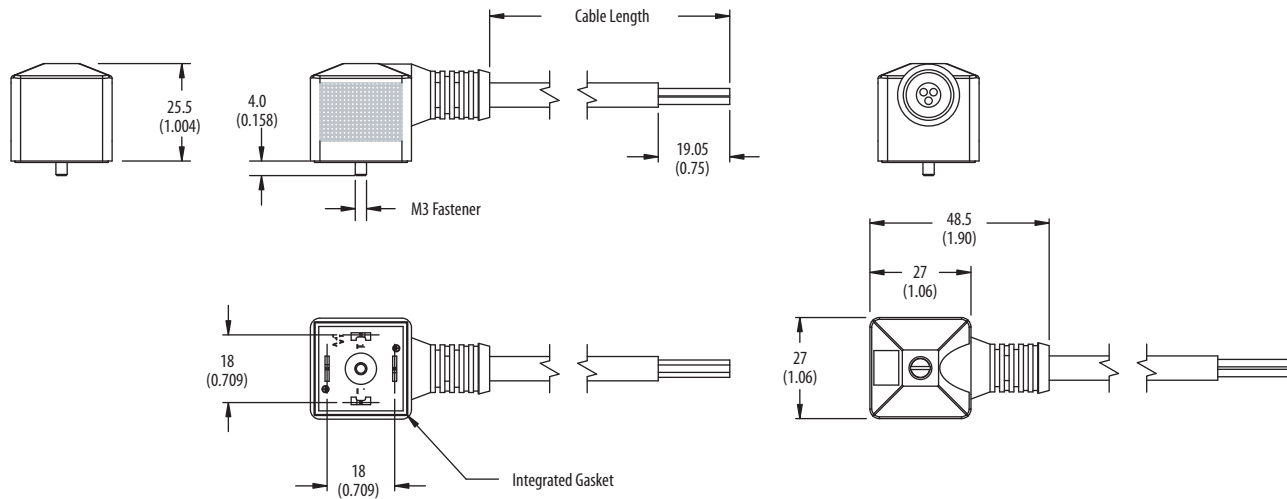

Pinout

Face View Pinout				
2-Pin	3-Pin		5-Pin	
Dual Ground	Ground Toward Cable Exit	Ground Away from Cable Exit		
	1 Brown 2 Blue 3 Black GND Yellow & Green		1 Brown 2 White 3 Blue 4 Black 5 Grey	

Cordsets & Patchcords, DIN Valve Style

DIN Valve B (11 mm)




Valve B Cordset

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Housing Material	Molded oil-resistant PUR (NonLED version: black, LED version: clear)
Gasket Material	Nitrile
Contact Material	Tin-plated copper
Mounting Screw	18-8 Stainless Steel
Cable Type	Oil-resistant PVC jacket, 18 AWG conductor, 300V, UL Recognized and CSA Certified
Home Run Connection	10x diameter, min.
Cable Diameter [mm (in.)]	18 AWG, 3-conductor: 5.5 (0.216), 4-conductor: 6 (0.235)
Electrical	
Cable Rating	UL AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 80C 300V FT1, UV oil and water resistant
Assembly Rating	Straight Wired: 0...250V AC/DC, 10 A LED & Varistor surge suppression: 24V or 115V AC/DC, 10 A
Environmental	
Enclosure Type Rating	IP67, NEMA 6
Temperature Rating [C (F)]	-25...+80° (-13...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

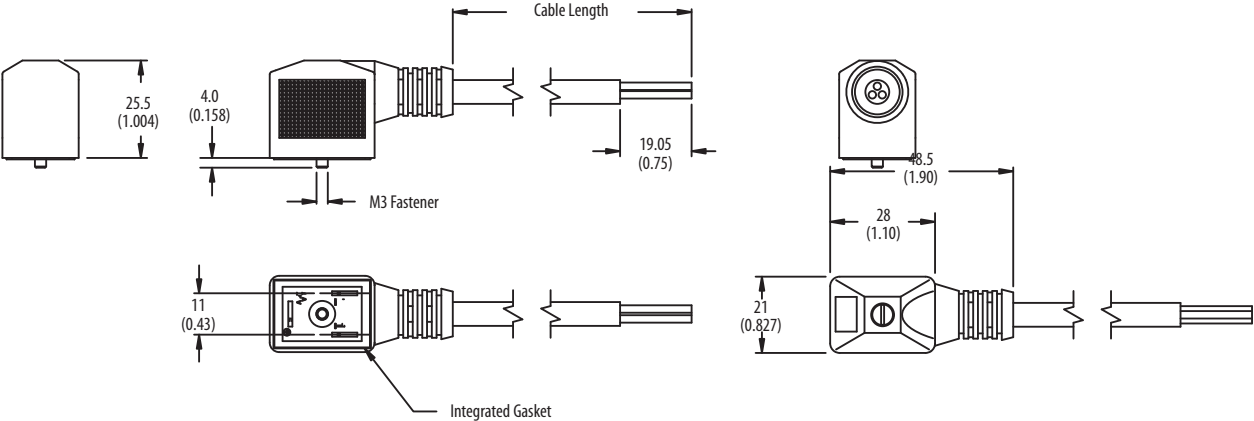

Pinout

Face View Pinout		
2-Pin		5-Pin
Ground Toward Cable Exit	Ground Away from Cable Exit	
1 Brown 2 Blue GND Yellow & Green		1 Brown 2 White 3 Blue 4 Black 5 Grey




Valve C Cordset

Specifications

Certifications	UL Recognized and CSA Certified
Mechanical	
Housing Material	Molded oil-resistant PUR (NonLED version: black, LED version: clear)
Gasket Material	Nitrile
Contact Material	Tin-plated copper
Mounting Screw	18-8 Stainless Steel
Cable Type	Oil-resistant PVC jacket, 20 AWG conductor, 300V, UL Recognized and CSA Certified
Bend Radius	10x diameter, min.
Cable Diameter [mm (in.)]	20 AWG, 4-conductor: 5.2 (0.205)
Electrical	
Cable Rating	UL AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 80C 300V FT1, UV oil and water resistant
Assembly Rating	Straight Wired: 0...250V AC/DC, 6 A LED & Varistor Surge Suppression: 24V or 115V AC/DC, 6 A
Environmental	
Enclosure Type Rating	IP67, NEMA 6
Temperature Rating [C (F)]	-25...+80° (-13...+176°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

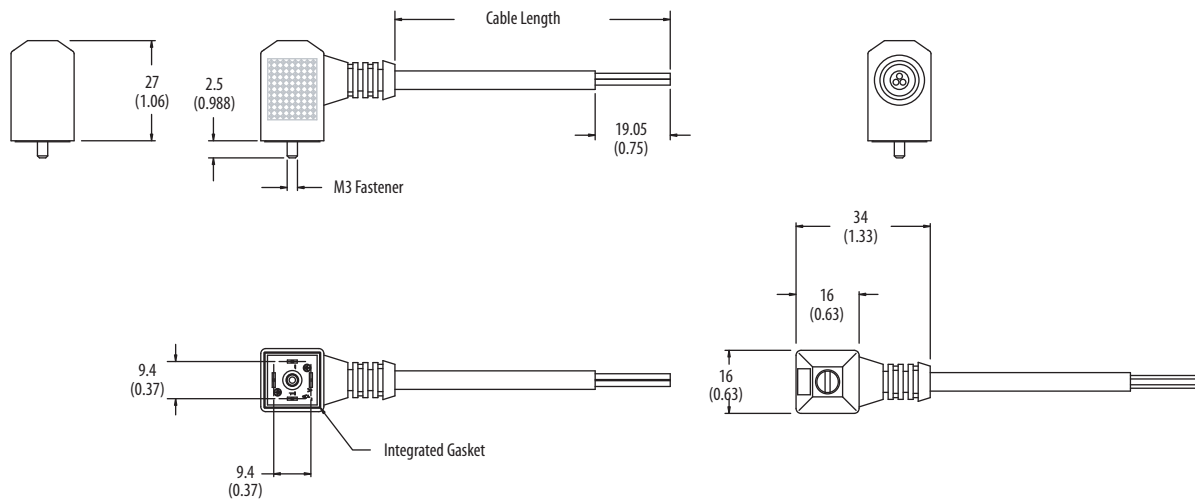

Pinout

Face View Pinout	
2-Pin	5-Pin
Dual Ground	
1 Brown 2 Blue GND Yellow & Green	1 Brown 2 White 3 Blue 4 Black 5 Grey

Field Attachable, DIN Valve Style

DIN Valve A (18 mm)




Valve A

Specifications

Mechanical	
Connector Shell Material	Polyamid Nylon 6
Gasket Material	Nitrile
Mounting Screw	Zinc-plated steel
No. of Main Contacts	2 + ground, 3 + ground
Cable Type	Connector accepts 14 AWG max.
Electrical	
Assembly Rating	Straight Wire: 0...250V, 10 A LED & Varistor surge suppression: 24V, 115V or 230V, 10 A
Environmental	
Enclosure Type Rating	IP65; NEMA 4
Operating Temperature [C (F)]	-25...+90° (-13...+194°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

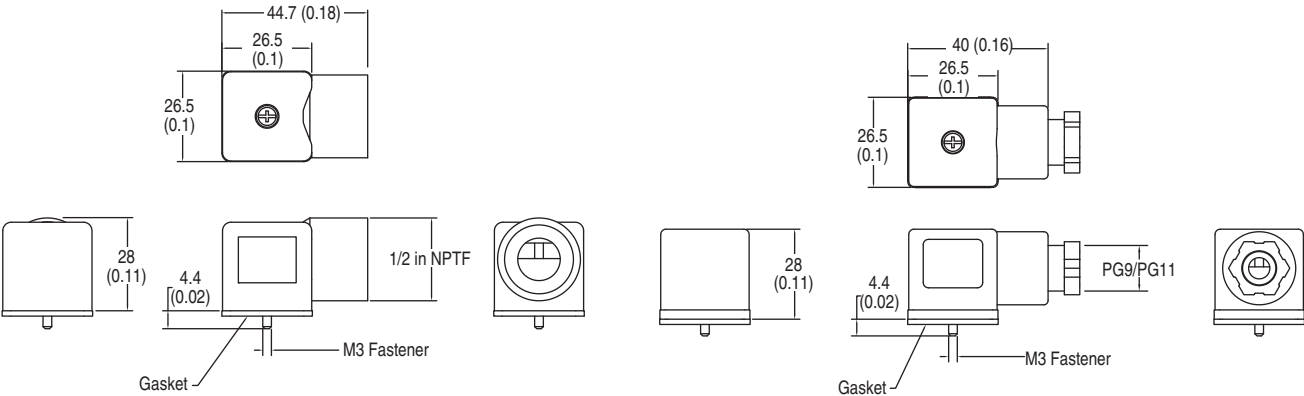

Pinout

Face View Pinout	
3-Pin	4-Pin

Note: The faceplate may be oriented in 90° increments.

Field Attachable, DIN Valve Style

DIN Valve B (11 mm) and BEU (10 mm)




Valve B & BEU

Specifications


Mechanical	
Connector Shell Material	Polyamid Nylon 6
Gasket Material	Nitrile
Mounting Screw	Zinc-plated steel
No. of Main Contacts	2 + ground
Cable Type	Connector accepts 14 AWG max.
Electrical	
Assembly Rating	Straight Wire: 0...250V, 10 A LED & Varistor surge suppression: 24V, 115V or 230V, 10 A
Environmental	
Enclosure Type Rating	IP65; NEMA 4
Operating Temperature [C (F)]	-25...+90° (-13...+194°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

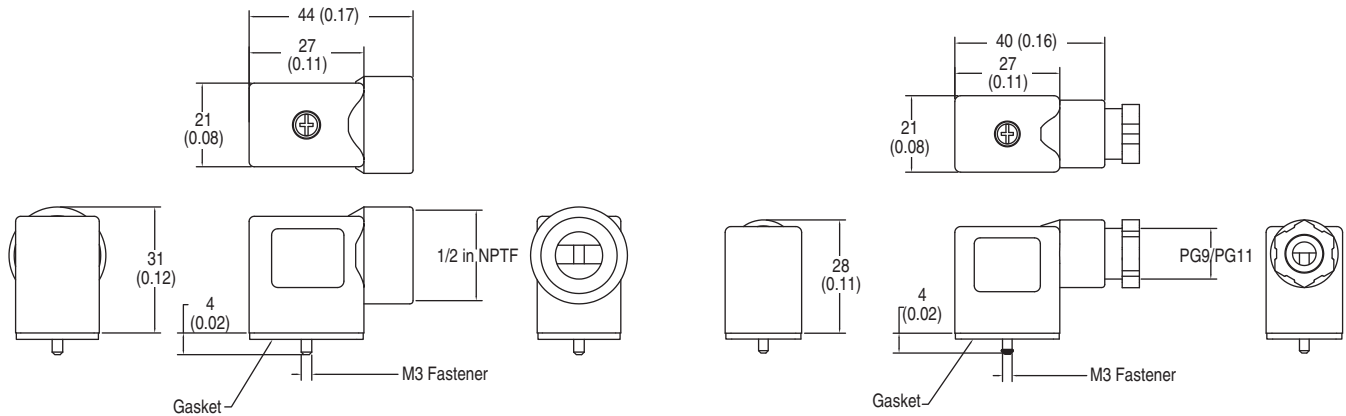

Pinout

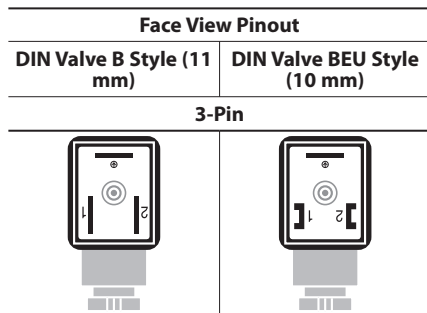

Note: The faceplate may be oriented in 180° increments.

Field Attachable, DIN Valve Style

DIN Valve C (9.4 mm) and CEU (8 mm)




Valve C & CEU

Specifications

Mechanical	
Connector Shell Material	Polyamid Nylon 6
Gasket Material	Nitrile
Mounting Screw	Zinc-plated steel
No. of Main Contacts	2 + ground, 3 + ground
Cable Type	Connector accepts 20 AWG max.
Electrical	
Assembly Rating	Straight Wire: 250V AC/300V DC, 6 A LED & Varistor surge suppression: 24V, 115V or 230V, 6 A
Environmental	
Enclosure Type Rating	IP65; NEMA 4
Operating Temperature [C (F)]	-25...+90° (-13...+194°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

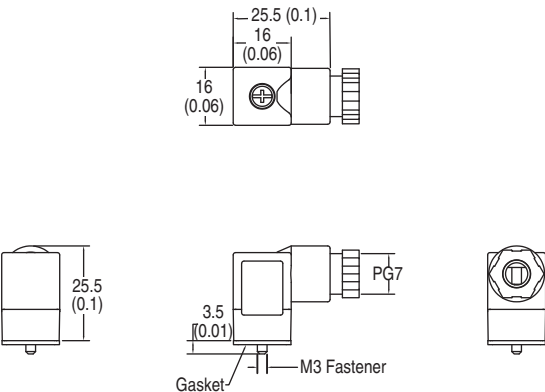

Pinout

Face View Pinout			
DIN Valve C Style (9.4 mm)		DIN Valve CEU Style (8 mm)	
3-Pin	4-Pin	3-Pin	4-Pin

Note: The faceplate may be oriented in 90° increments.




4-Pin IDC Receptacle

Specifications

Mechanical	
Receptacle Shell Material	Nickel-plated brass
Coupling Nut Material	Nickel-plated brass
Connector Shell Material	Nickel-plated brass
Connector Insert Material	Black PUR
Contact Material	Gold over nickel-plated brass
IDC Installations, max.	10
Conductor OD [mm (in.)]	24...22 AWG, 1.6...2.0 (0.063...0.079)
Cable Diameter	1.2...1.6 (0.047...0.063)
Wire Insulation	Oil-resistant PVC, 22 AWG stranded copper, 300V, UL Recognized
Environmental	
Enclosure Type Rating	IP67, 1200 psi (8270 kPa) washdown
Operating Temperature [C (F)]	-20...+85° (-4...+185°)

Approximate Dimensions

Dimensions are in millimeters (inches). Illustrations are not drawn to scale.

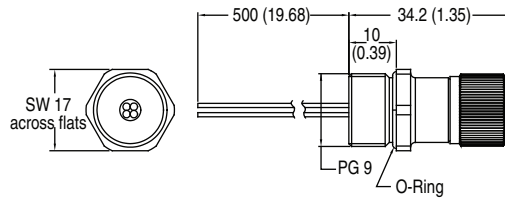

Cable Spools



22 & 18 AWG, PVC

Specifications

Cable Type	Oil-resistant PVC jacket, PVC insulated conductors, 300V
Cable Rating	UL AWM style 2661 VW-1 105C 300V, CSA AWM A/B I/II 80C 300V FT1, UV oil and water resistant
Operating Temperature [C (F)]	-20...+105 ° (-4...+221 °)



PUR 22 AWG & TPE 18 AWG

Specifications

Cable Type	Oil-resistant jacket, PVC insulated conductors, 300V
Cable Rating	PUR: UL AWM style 20866 VW-1 80C 300V, CSA AWM A/B I/II 80C 300V FT1, UV oil and water resistant; TPE: UL AWM style 20327 VW-1 105C 300V, CSA AWM A/B I/II 105C 300V FT1, UV oil and water resistant
Operating Temperature [C (F)]	PUR: -20...+80° (-4...+176°); TPE: -20...+105° (-4...+221°)

Allen-Bradley and Rockwell Automation are trademarks of Rockwell Automation, Inc. Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444
Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640
Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846