



Wall or ceiling mount to control 500 Watts incandescent or 100 Watts Fluorescent lighting. Vandalproof lens. Full 180° view . Cover not included.

Color: White

Weight: 1.9 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations.

### Construction

#### Compatibility:

Compatible with most electronic ballasts. Not compatible with instant start ballasts.

### Electrical

#### Voltage:

120 volts AC 60 Hz.

#### Manual Override:

Double flip wall switch logic prevents activation by brief power outages. Resets after 6 hours. No extra wiring needed.

#### Surge Protection:

Withstands up to 3000 volts.

#### RF Immunity:

Circuits fully shielded for maximum radio frequency immunity.

#### Incandescent Watts Switched:

500 watts @ 120 volts.

#### Fluorescent Watts Switched:

250 watts @ 120 volts.

#### Power Consumption:

Negligible

#### Manual Switch:

None.

#### Switching Capacity:

Relay On/Off Model Switches 240 watts when lights are mounted to sensor. 500 watts Incandescent or 240 watts Fluorescent of remotely mounted lighting @ 120 volts.

### Sensor Characteristics

#### Time Adjustment:

5 seconds to 15 minutes.

#### Quick Test Time:

5 second test time for fast installation. Works day or night.

#### Photoelectric Control:

Deactivates lights during daylight. Fully adjustable for 24 hour operation or custom applications.

#### Time Delay:

5 seconds to 15 minutes.

#### Ambient Light Sensing:

Adjustable.

#### Detection:

180° detection pattern.

### Other

#### "No Hands" Auto Testing:

Auto mode starts after 4 minutes of testing. No adjustment needed.

#### Ratings:

5 amps.

#### Adjustments:

Time, ambient light & sensitivity.

#### Warranty:


5 year sensor warranty.

### LED Characteristics

#### LED Detection Indicator:

LED glows red day & night for "on guard" deterrence.

## Dimensions

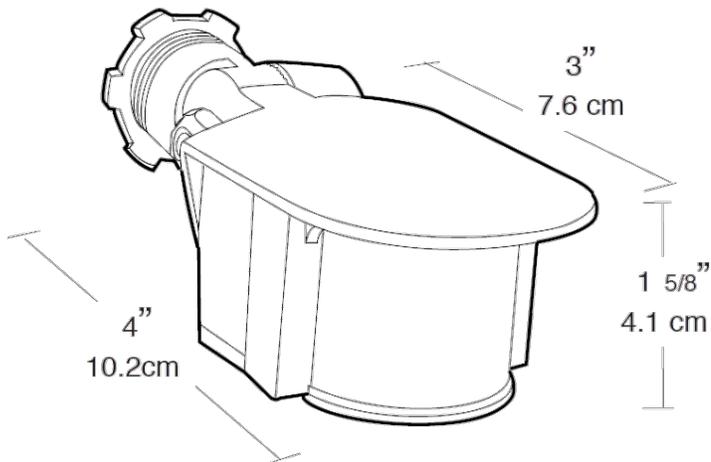

## Features

- Surge protected
- 180° detection pattern
- Quick installation with 5 second test time and auto test logic
- LED "on guard" indicator
- Protected manual override with auto reset after 8 hours or at dawn