


T&B Conduit Fittings

Liquidtight Flexible Metal Conduit Fittings



5262 Series

Liquidtight Sealing Gasket

Application

- When used with an externally threaded connector provides a tight seal against oil, fumes or moisture at the knockout opening.

Features


- Design locks resilient sealing material in steel.
- Steel retainer protects seal from extruding out under torque and limits compression to an optimum predetermined value; provides high quality seal.
- Resilient material flows and seals rough surfaces.

Standard Material

Retainer.....Stainless Steel
Sealing MaterialSantoprene
Thermoplastic Rubber

Range

½ thru 4" Hub Size


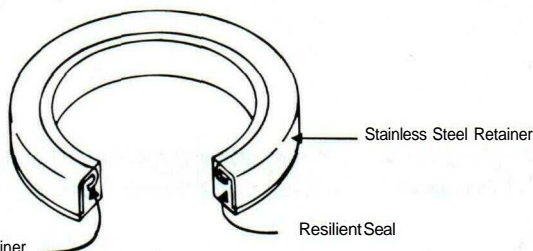


Resilient Sealing Material Locked in Steel Retainer

Sealing Ring with Stainless Steel Retainer

Cat No.	Conduit Size	Dimension (in.)	
		A	B
5299"	VI	.80"	.11"
5261"	W	.95"	.11"
5262	W	1.16"	MB'
5263	¾"	1.49"	.19"
5264	r	1.75"	.19"
5265	1W	2.15"	.22"
5286	1W	2.42"	.23"
5267	2"	2.92"	.23"
5268	2W	3.44"	.23"
5269	3"	4.08"	.23"
5270	4"	5.29"	.31"

"U.L. not applicable
U.L. File No. E 13938
CSA File No. 2884




B Thickness

HEMA 3R, 4, 6 & 13
For use with T&B Fittings. Sealing material resists oil, coolants, and hydraulic fluids as well as water.

Liquidtight K.O. Plug

Cat. No.	Size	A
5710	VI	1 1/2"
5711	¾"	1 1/2"
5712	V	1 3/4"
5713	1W	2 1/2"
5714	1 1/4"	2V?
5715	2"	3 1/2"
5716	2 1/2"	3 3/4"
5717	3"	4 1/4"
5718	4"	5 1/4"

U.L. Listed liquidtight
CSA not applicable
Meets Coast Guard Regulation CG293
U.L. File No. E 13938
CSA File No. 2884



NEMA 3R, 4, 6, 13
Made of flame retardant neoprene, these new K.O. plugs meet U.L. 514 (flammability test). They provide a liquidtight, dust, and oil-tight re-usable seal for electrical knockouts. NEMA 3R, 4, 6 & 13 boxes can be saved or re-used whenever a K.O. is no longer used. No tools needed to install; just push into hole... they snap in. Temperature range - 30°C to 105°C.