



GE  
Lighting

90606 - GE HIR™ PLUS PAR38

83PAR/HIR+/FL25

### Product Photo



### GENERAL CHARACTERISTICS

Base Description	Medium Skirt
Base Type	Screw-In
Filament	CC-8
Life in Years	3.8 yr
Rated Life Hours-nominal	4200 h
Primary Application	Indoor and outdoor Floodlight
Product Technology	Halogen
Base	E26/50x39
Bulb Shape	PAR38

### PHOTOMETRIC CHARACTERISTICS

Beam Spread	25 deg
Center Beam Candle Pwr Candela	7000 cd
Nominal Initial Lumen per Watt	24
Initial Lumens-nominal	2030 lm
Color Temperature	2850 K

### PRODUCT INFORMATION

Product Code	90606
Description	83PAR/HIR+/FL25
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168906067
Standard Package GTIN	10043168906064
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168906067
Alternative Unit Of Measure	EACH
Standard Package Quantity	12
Ean UPC	043168906067
Standard Package GTIN	00043168906067
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
Sales Unit	Each
UCC	043168906067

### DIMENSIONS

Diameter	4.75 in
----------	---------

### ELECTRICAL CHARACTERISTICS

Estimated Energy Cost per Year	10 \$
Input Voltage [nom]	120 V
Rated power (Watts)	83 W

### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
- Do not use lamp if outer glass is scratched or broken.

#### Warning

##### Risk of Fire

- Keep combustible materials away from lamp.

##### Risk of Electric Shock


- Turn power off before inspection
- installation or removal.

##### Risk of Burn

- Allow lamp to cool before handling.

Unexpected lamp rupture may cause injury, fire, or property damage

Do not use lamp if outer glass is scratched or broken.

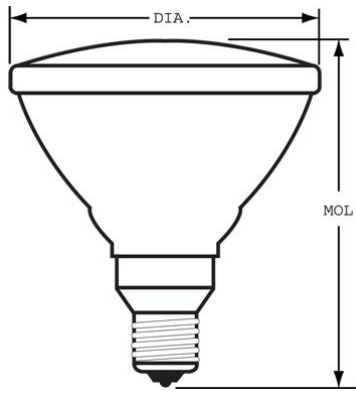

Jun 30, 2017 5:30:32 AM For additional information, visit [www.gelighting.com](http://www.gelighting.com)