

Bushings



Plastic - 105°C

Catalog Number	Size	Amount Unit	Amount Std. Pkg.	Weight PerC
321	1/2"	100	1000	.5
322	3/4"	100	1000	.6
323	1"	50	500	1.2
324	1 1/4"	Bulk	100	1.4
325	1 1/2"	Bulk	100	1.8
326	2"	Bulk	50	3.0
327	2 1/2"	Bulk	25	4.4
328	3"	Bulk	25	6.4
329	3 1/2"	Bulk	25	7.2
330	4"	Bulk	20	7.5
331	5"	Bulk	5	28.0
332	6"	Bulk	5	34.0

Plastic - 150°C

Catalog Number	Size	Amount Unit	Amount Std. Pkg.	Weight PerC
321-B	1/2"	100	1000	.5
322-B	3/4"	100	1000	.6
323-B	1"	50	500	1.2
324-B	1 1/4"	Bulk	100	1.4
325-B	1 1/2"	Bulk	100	1.8
326-B	2"	Bulk	50	3.0
327-B	2 1/2"	Bulk	25	4.4
328-B	3"	Bulk	25	6.4
329-B	3 1/2"	Bulk	25	7.2
330-B	4"	Bulk	20	7.5

Application

Used with locknut to terminate threaded rigid or IMC to box. Rounded surface of bushing prevents damage to wire insulation.

Material

Plastic rated 105°C

Plastic rated 150°C

Standard Finish

Plain finish

Dimensions

Refer to dimension section of catalog page 514

Certifications

® File No. E9391: 321 thru 332


® File No. E11259: 321-B thru 330-B

@ File No. LR39354: 321 thru 330, 321-B thru 330-B

Federal Spec. A-A-50553

Dimensional Data


Insulated Grounding Bushing with Copper Lugs

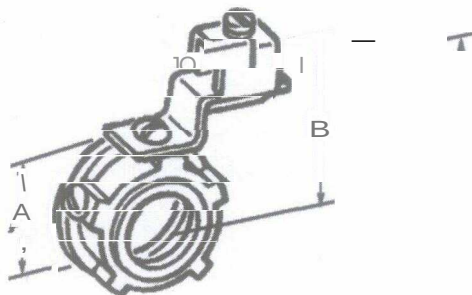

Zinc Die Cast

Catalog Number	Dim. "A"	Dim. "B"
351-DC	1"	1-1/4"
352-DC	1-1/4"	1-3/8"
353-DC	1-1/2"	1-1/2"
354-DC	1-7/8"	1-5/8"
355-DC	2-1/8"	2"
356-DC	2-5/8"	2-1/4"
357-DC	3-3/16"	2-7/8"
358-DC	3-7/8"	3-1/4"
359-DC	4-1/4"	3-1/2"
360-DC	4-7/8"	3-3/4"

Bushings



Plastic - 105°C

Catalog Number	Dim. "A"	Dim. "B"	Dim. "C"
321	1"	3/8"	5/8"
322	1-1/4"	3/8"	13/16"
323	1-9/16"	1/2"	1"
324	1-15/16"	1/2"	15/16"
325	2-3/16"	1/2"	1-9/16"
326	2-11/16"	1/2"	2"
327	3-1/8"	5/8"	2-3/8"
328	3-13/16"	3/4"	2-15/16"
329	4-5/16"	3/4"	3-3/8"
330	4-13/16"	3/4"	3-13/16"
331	6-5/16"	1"	4-7/8"
332	7-3/8"	1"	5-13/16"

Plastic - 150°C

Catalog Number	Dim. "A"	Dim. "B"	Dim. "C"
321-B	1"	3/8"	5/8"
322-B	1-1/4"	3/8"	13/16"
323-B	1-9/16"	1/2"	1"
324-B	1-15/16"	1/2"	15/16"
325-B	2-3/16"	1/2"	1-9/16"
326-B	2-11/16"	1/2"	2"
327-B	3-1/8"	5/8"	2-3/8"
328-B	3-13/16"	3/4"	2-15/16"
329-B	4-5/16"	3/4"	3-3/8"
330-B	4-13/16"	3/4"	3-13/16"

General Notes and Product Standards

- Due to ongoing product improvements, specifications and dimensions are subject to change without prior notice.
- Dimensions are in inches and rounded off to the nearest fraction.
- Underwriters Laboratories, Canadian Standards Association, and Federal Specifications are current at time of publication but are subject to change without prior notice. Current ® and Ⓢ listings are noted on the smallest unit carton label. Look for the appropriate logo
- This manual is intended for use as a guide in selection of electrical fittings manufactured by Bridgeport Fittings, Inc. Do not use this manual as an interpretation of the National Electrical Code or local regulations. Always consult your local electrical inspector for requirements in your area.

Products listed by Underwriters Laboratories comply with the following specifications:

Product Group	UL Standard	NEMA Standard	Federal Specification
Rigid & IMC Conduit Bodies	UL-514A	FB-1	W-C-586D
Rigid & IMC Conduit	UL-514B	FB-1	A-A-50553
EMT	UL-514B	FB-1	A-A-50553
Liquid Tight	UL-514B	FB-1	A-A-50552
Portable Cord	UL-514B	FB-1	A-A-50552
Flexible Metal & Armored Cable	UL-514B	FB-1	A-A-50552
Nonmetallic Cable	UL-514B	FB-1	A-A-50552
Grounding Fittings	UL-467	FB-1	A-A-50552
Service Entrance	UL-514B	FB-1	W-C-586D