



Commercial Combination Devices




Single Pole Switch with Second Device

Commercial Combination Devices

Features:

- Switches meet all UL 20 requirements, receptacles meet all UL 498 requirements.
- Grounding terminal screw standard.
- Combination switch with additional switch has 120/277 rating ideal for fluorescent lighting fixtures typical in commercial applications.
- Receptacles have triple wipe line contacts and double wipe ground contacts to insure long-term plug retention.
- .050" thick steel mounting strap zinc-plated for corrosion resistance.
- Break-off provision for wiring both devices on same circuit or on separate circuits.

- Terminal screws backed out — ready for wiring.
- Side wire terminals accept up to #10 solid or stranded wire.
- Pilot light may be wired to indicate power "on" or power "off".
- Combination switch with receptacle catalog numbers 272, 274, 291 feature neon pilot light standard.
- Combination slot/Phillips head mounting and terminal screws ease installation with power screwdrivers.
- Made in USA.

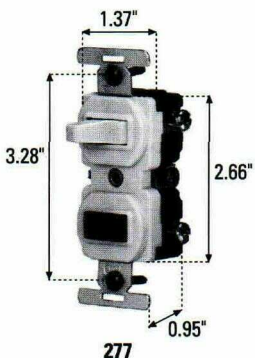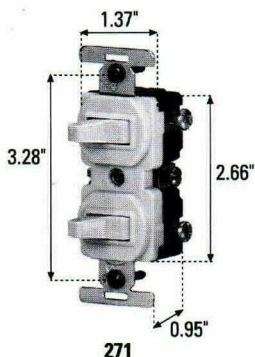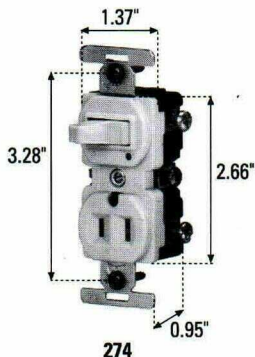

Single Pole Switch with Receptacle – Side Wire

Catalog No.

Switch Rating	Receptacle Rating	Second Device Description	Color	Catalog No.
15A 120V AC	15A 125V	2P2W Receptacle	Brown	272B
			Ivory	272V
15A 120V AC	15A 125V	2P3W Grounding Receptacle	Almond	274A
			Brown	274B
			Ivory	274V
			White	274W
20A 120/277V AC	20A 125V	2P3W Grounding Receptacle	Brown	291B
			Ivory	291V
			White	291W

Single Pole Switch with Additional Switch – Side Wire

Catalog No.

Rating A	V/AC	Second Device Description	Color	Catalog No.
15	120/277	Single Pole Switch	Almond	271A
			Brown	271B
			Ivory	271V
			White	271W
15	120/277	Three Way Switch	Brown	275B
			Ivory	275V
			White	275W

Single Pole Switch with Pilot Light – Side Wire

Catalog No.

Switch Rating	Pilot Light Rating	Color	Catalog No.
15A 120AC	1/25W 120V	Brown	277B
		Ivory	277V

B9

Switches