



GE
Lighting

10134 - GE Daylight Starcoat® T8

F15T8/D

Product Photo



GENERAL CHARACTERISTICS

Base Description	Medium Bi-Pin
Base Type	Pin/Plug-In
Mercury Content	18 mg
Mercury-Picogram per mean lm hr	3902.4
Starting Temp (MIN) C-degrees	10 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	7500 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	G13
Bulb Shape	T8

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	615 lm
Nominal Initial Lumen per Watt	47
Initial Lumens-nominal	700 lm
Color Rendering Index-CRI	75
Color Temperature	6500 K

PRODUCT INFORMATION

Product Code	10134
Description	F15T8/D
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168981361
Standard Package GTIN	00043168101349
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168101349
Alternative Unit Of Measure	EACH
Standard Package Quantity	24
Ean UPC	043168981361
Standard Package GTIN	00043168981361
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
Sales Unit	Each
UCC	043168101349

DIMENSIONS

Bulb Diameter (DIA) <Max>	1.1 in
Bulb Diameter (DIA) <Min>	0.94 in
Diameter	1.0 in
End of Base Pin to Pin	17.67 in
Face to End of Opposing Pin (B) <Max>	17.5 in
Face to End of Opposing Pin (B) <Min>	17.39 in
Nominal Length	18.0 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	157.00 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MIN)	4.250
Cathode Resistance Ratio - Rh/Rc (MAX)	6.500
Rated power (Watts)	15 W

CAUTIONS & WARNINGS

Caution

Lamp may shatter and cause injury if broken


Wear safety glasses and gloves when handling lamp.

Do not use excessive force when installing lamp.

Warning

Risk of Electric Shock

Turn power off before inspection
installation or removal.

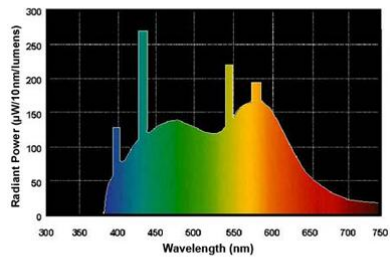

Dec 20, 2016 4:38:00 AM For additional information, visit www.gelighting.com