

Spec 5™ Malleable Iron Conduit Bodies

For Rigid Conduit & IMC

Types LB, T, LB-G & T-G

Use:

To provide access to conductors for pulling, splicing, maintenance and future changes/upgrades. Allows connection of straight conduit runs, branch conduit runs and 90° bends.

Features:

- Tapered threaded hubs (NPT).
- Raintight when used with gasketed covers.
- Malleable iron suitable for use in concrete.
- For covers and gaskets, see Pages AB4 and AB5.
- Complete interchangeability with other manufacturers' style "5" or "35" Conduit Bodies.
- Internal volume and maximum wire clearly marked on castings.

Material/Finish:

Malleable Iron/
Zinc Electroplated Aluminum Enamel
Catalog number with suffix "G"
Malleable Iron with Hot Dip Galvanize

Third Party Certification:



UL Listed E-18095
Suitable for wet locations when used with gasketed covers.



CSA Certified: 009795
Suitable for wet locations when used with gasketed covers.

Applicable Third Party Standards:

UL Standard: 514A
CSA Standard: C22.2 No. 18
Fed Spec: A-A-50563
NEMA: FB-1, FB-2.10


Dimensional Data:

See Pages AB6 - AB8


Note: Conduit bodies are suitable for use in Class I, Div. 2 hazardous locations per NEC Section 501-4(B).

Trade Size (inches)	Catalog Number Malleable Iron Zinc Plated
1/2	LB-50
3/4	LB-75
1	LB-100
1 1/4	LB-125
1 1/2	LB-150
2	LB-200
2 1/2	LB-250
3	LB-300
3 1/2	LB-350
4	LB-400
1/2	T-50
3/4	T-75
1	T-100
1 1/4	T-125
1 1/2	T-150
2	T-200
2 1/2	T-250
3	T-300
3 1/2	T-350
4	T-400


Trade Size (inches)	Catalog Number Malleable Iron Hot Dip Galvanized
1/2	LB-50G
3/4	LB-75G
1	LB-100G
1 1/4	LB-125G
1 1/2	LB-150G
2	LB-200G
2 1/2	LB-250G
3	LB-300G
3 1/2	LB-350G
4	LB-400G
1/2	T-50G
3/4	T-75G
1	T-100G
1 1/4	T-125G
1 1/2	T-150G
2	T-200G
2 1/2	T-250G
3	T-300G
3 1/2	T-350G
4	T-400G

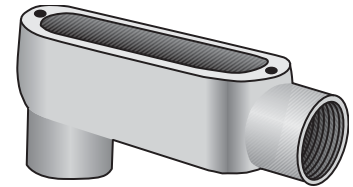


Type LB

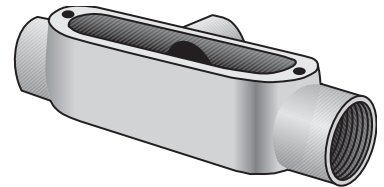

Type T

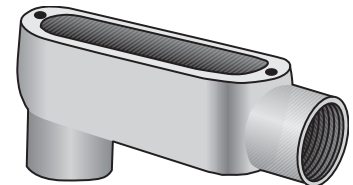

Type LB-G
Hot Dip Galvanized

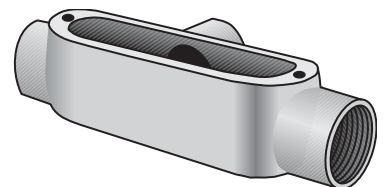


Type T-G
Hot Dip Galvanized

Spec 5™ Malleable Iron Conduit Bodies

For Rigid Conduit & IMC


Dimensional Data:

Type LB



Catalog Number	Trade Size	Dimensions in Inches						Volume Cu. In.	Max No. Conductors
		B	C	D	F	H	J		
LB-50	½	1⅛	1⅛	4	1½	4	4⅝	4.0	N/A
LB-75	¾	1⅛	1⅛	4⅝	1⅝	4⅝	5⅝	7.0	3 #6AWG
LB-100	1	1⅞	2	5⅝	1⅞	5⅝	6¼	12.0	3 #4AWG
LB-125	1¼	2⅝	2⅝	7¼	2¼	7	8¼	32.0	3 #2AWG
LB-150	1½	2⅝	2¾	7⅝	2⅝	7	8¼	36.0	3 #1/0AWG
LB-200	2	3¼	3⅝	9⅝	2¾	9⅝	10⅝	70.0	3 #4/0AWG
LB-250	2½	4⅝	4	12⅝	3⅝	11⅝	13¾	142.0	3 #300MCM
LB-300	3	4⅝	4¾	12⅝	3⅝	11⅝	13¾	173.0	3 #400MCM
LB-350	3½	5⅝	5½	15	4¼	14	16¼	292.0	3 #500MCM
LB-400	4	5⅝	5⅝	15	4¼	14	16¼	324.0	3 #500MCM
LB-50G	½	1⅛	1⅛	4	1½	4	4⅝	4.0	N/A
LB-75G	¾	1⅛	1⅛	4⅝	1⅝	4⅝	4⅝	7.0	3 #6AWG
LB-100G	1	1⅞	2	5⅝	1⅞	5⅝	6¼	12.0	3 #4AWG
LB-125G	1¼	2⅝	2⅝	7¼	2¼	7	8¼	32.0	3 #2AWG
LB-150G	1½	2⅝	2¾	7⅝	2⅝	7	8⅝	36.0	3 #1/0AWG
LB-200G	2	3¼	3⅝	9⅝	2¾	9⅝	10⅝	70.0	3 #4/0AWG
LB-250G	2½	4⅝	4	12⅝	3⅝	11⅝	13¾	142.0	3 #300MCM
LB-300G	3	4⅝	4¾	12⅝	3⅝	11⅝	13¾	173.0	3 #400MCM
LB-350G	3½	5⅝	5½	15	4¼	13⅝	16¼	292.0	3 #500MCM
LB-400G	4	5⅝	5⅝	15	4½	14	16¼	324.0	3 #500MCM

Type T



Catalog Number	Trade Size	Dimensions in Inches						Volume Cu. In.	Max No. Conductors
		A	B	C	D	G	H		
T-50	½	5⅝	1⅛	1⅛	4	1⅛	4.0	N/A	
T-75	¾	6⅝	1⅛	1⅛	4⅝	1⅝	7.0	3 #6AWG	
T-100	1	7⅝	1⅛	2	5⅝	1¾	12.0	3 #4AWG	
T-125	1¼	9⅝	2⅝	2⅝	7¼	2¼	32.0	3 #2AWG	
T-150	1½	9¾	2⅝	2¾	7¼	2¼	36.0	3 #1AWG	
T-200	2	11⅝	3¼	3½	9⅝	2⅝	70.0	3 #2/0AWG	
T-250	2½	15⅝	4⅝	4	12⅝	3⅝	142.0	3 #4/0AWG	
T-300	3	15⅝	4⅝	4¾	12⅝	3⅝	173.0	3 #4/0AWG	
T-350	3½	18⅝	5½	5½	15	4½	290.0	3 #350MCM	
T-400	4	18⅝	5½	5½	15	4½	324.0	3 #350MCM	
T-50G	½	5⅝	1⅛	1⅛	4	1⅛	4.0	N/A	
T-75G	¾	6⅝	1⅛	1⅛	4⅝	1⅝	7.0	3 #6AWG	
T-100G	1	7⅝	1⅛	2	5⅝	1¾	12.0	3 #4AWG	
T-125G	1¼	9⅝	2⅝	2⅝	7¼	2¼	32.0	3 #2AWG	
T-150G	1½	9⅝	2⅝	2¾	7¼	2¼	36.0	3 #1AWG	
T-200G	2	11⅝	3¼	3½	9⅝	2⅝	70.0	3 #2/0AWG	
T-250G	2½	15⅝	4⅝	4	12⅝	3⅝	142.0	3 #4/0AWG	
T-300G	3	15⅝	4⅝	4¾	12⅝	3⅝	173.0	3 #4/0AWG	
T-350G	3½	18⅝	5½	5½	15	4½	290.0	3 #350MCM	
T-400G	4	18⅝	5½	5½	15	4½	324.0	3 #350MCM	