

**SpikeShield® Power Quality Products**  
**15A, 125V AC, 2 Pole, 3 Wire Grounding**  
**Surge Protection Receptacles**

**HUBBELL**



**Features**

- Automatic self-grounding staple
- Distinctive surge symbol provides quick identification
- Power-on indicator light verifies that power is available
- Alert alarm sounds when surge protection is no longer functioning

**Ordering Information**

| Description            | Device Color | UPC          | Catalog Number |
|------------------------|--------------|--------------|----------------|
| Receptacles with light | Blue         | 783585060170 | HBL5262SA      |




**Listings**

UL Listed File E2186  
 Listed to UL Standards 498  
 CSA Certified to Specification C22.2 No. 42

**Specifications**

|                |                               |
|----------------|-------------------------------|
| Face Material  | Nylon                         |
| Base Material  | Nylon                         |
| Power Contact  | .031" (.8) Brass              |
| Contact Design | Tandem Modified Bypass        |
| Mounting Strap | .050" (1.3) Steel-Zinc Coated |

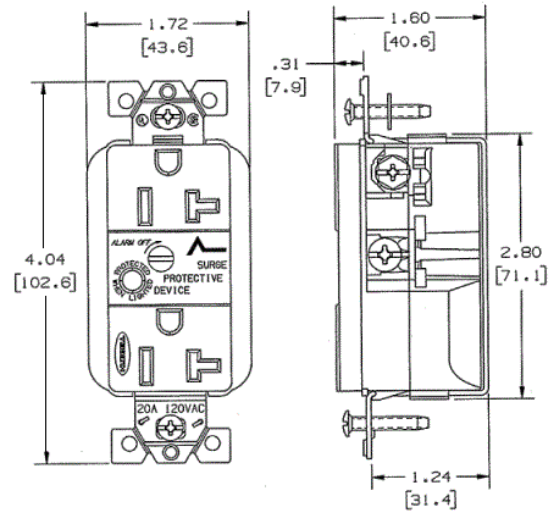

**Performance**

| <b>Electrical</b>             |  |
|-------------------------------|--|
| Protection Modes              | Normal and Common Modes  |
| Response Time                 | Approximately 5 ns   |
| Transient Suppression Voltage | Peak Energy (10 X 100 µs), Peak Current (8 X 20 µs)<br>120V AC + 10% - 15% |
| <b>Environmental</b>          |  |
| Flammability                  | UL 94V-2   |
| Operating Temperature         | 32°F to 140°F (0°C to 60°C)  |

**Online Resources**

Customer Use Drawing  
 eCatalog  
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

