




M-14321

1


CAT. NO. & RATING PRINTED ON BLADE HOLDER, COLOR CODE BY VOLTAGE

2.22 ± .03
[56.5 ± .8]

∅2.33 ± .03
[59.2 ± .8]

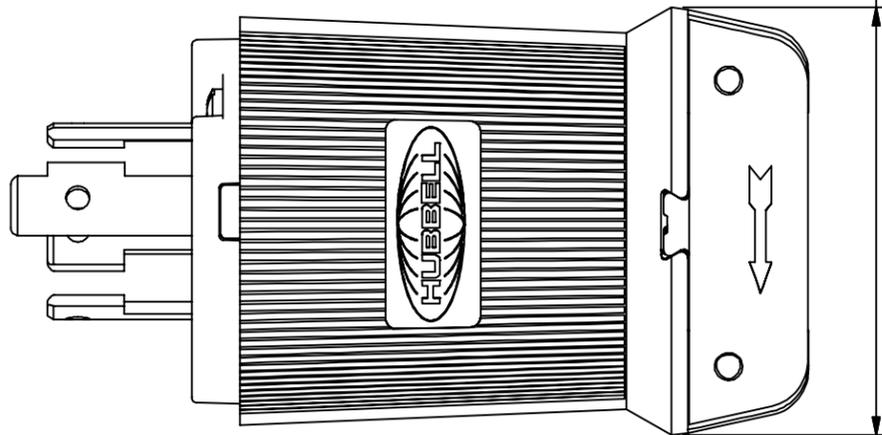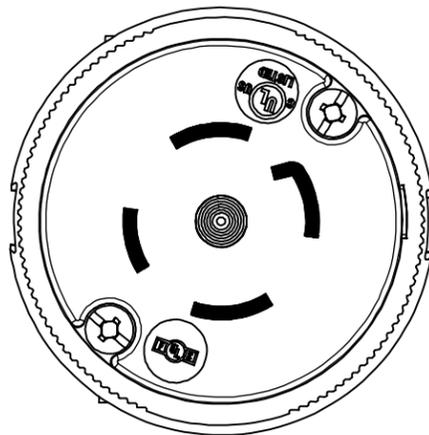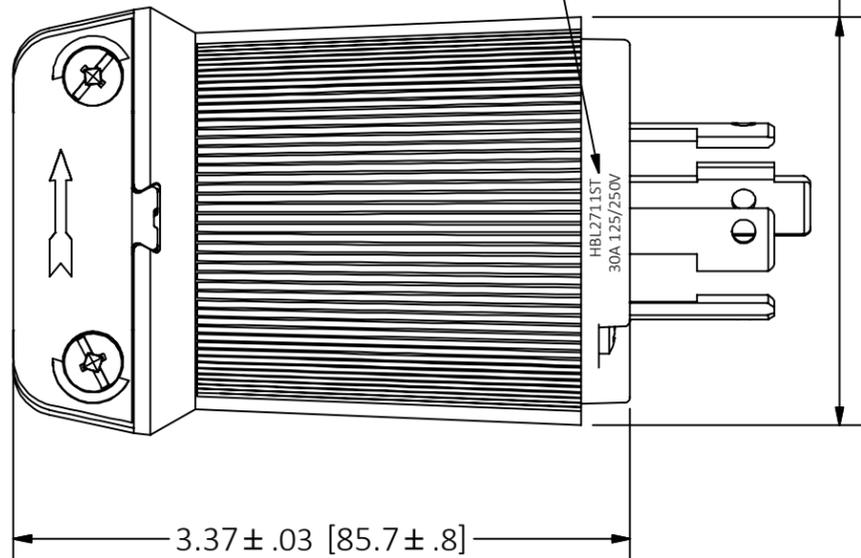

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
COVER	NYLON	BLACK
CORD CLAMP	NYLON	NATURAL
BLADE HOLDER	NYLON	NATURAL
RETAINER	NYLON	BLACK
BLADES	COPPER ALLOY	
SPRING	STAINLESS STEEL	
PLUNGER	NYLON	
ASSEMBLY FASTENERS	STEEL	ZINC PLATE
CORD CLAMP INSERTS	NYLON	BLACK
DUST SHIELD	TPE	BLACK

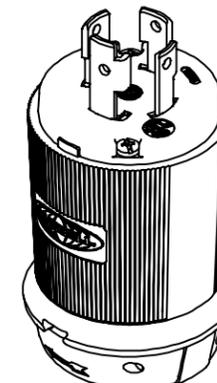

CAT. NO. HBL2721ST
(NOT SHOWN TO SCALE)

NEMA NO.	RATING	POLE/WIRE	CAT. NO.	BLADE CONFIGURATION	VOLTAGE COLOR CODE
L14-30P	125/250V	3P/4W GROUNDING	HBL2711ST		ORANGE
L15-30P	3∅ 250VAC	3P/4W GROUNDING	HBL2721ST		BLUE
L16-30P	3∅ 480VAC	3P/4W GROUNDING	HBL2731ST		RED
L21-30P	3∅ Y 120/208VAC	4P/5W GROUNDING	HBL2811ST		BLUE
L22-30P	3∅ Y 277/480VAC	4P/5W GROUNDING	HBL2821ST		RED

- NOTES (UNLESS OTHERWISE SPECIFIED):**
1. DIMENSIONS ARE IN INCHES [mm].
 2. ALL DEVICES ARE cULus LISTED & FED SPEC.
 3. CORD TYPES: S & SJ
 4. CORD CLAMP RANGE: 0.35 [9 mm] - 0.60 [15 mm].
 5. WIRING TERMINAL ACCOMMODATION: 14 AWG - 8 AWG STRANDED COPPER WIRE ONLY
 6. ASSEMBLY SCREWS ARE PHILLIPS/SLOTTED/ROBERTSON HEAD.
 7. CATALOG NUMBERS & RATING ARE PAD PRINTED ON THE SIDE OF THE DEVICE, COLOR CODED BY VOLTAGE.

1	INITIAL RELEASE PER DCN 211202014898 PS	MAM	12/03/21
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE
30A 4 & 5-WIRE SPRING TERMINATED PLUGS

		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2'	DR. BY PS	SCALE	1 : 1
	CHK. BY MAM	DATE	11/17/21