


[Catalog Home](#)

## Product Datasheet



ANDERSON FARGO

## GL409A -- Automatic Splice



Automatic Splice, Full Tension, for 4/0 ACSR/AAAC/AAC

## Product Specifications


<b>Splice Type</b>	 Automatic Splices
<b>Automatic Splice Series</b>	 GL-400 Series Automatic Splice Aluminum Full Tension AAC, AAAC & ACSR Conductor Single Layer Al Strand Conductor
<b>PDF Catalog Page</b>	<a href="#">Click HERE to view the web page.</a>
<b>Conductor Type</b>	AAC, AAAC, ACSR
<b>Conductor Diameter (Minimum)</b>	0.505 in
<b>Conductor Diameter (Maximum)</b>	0.595 in
<b>Automatic Conductor Range</b>	4/0 ACSR 4/0 AAAC 4/0 AAC
<b>Material</b>	Aluminum
<b>Gripper Material</b>	Aluminum Alloy
<b>Minimum Conductor Diameter</b>	0.505 in
<b>Maximum Conductor Diameter</b>	0.595 in
<b>Outside Diameter</b>	0.505 - 0.595 in (12.83 - 15.11 mm)
<b>Dimension A</b>	17 in (420 mm)
<b>Dimension B</b>	1.6 in (41 mm)
<b>UL Listed</b>	No

<b>Inhibitor Loaded</b>	Yes
<b>Color Code</b>	Pink
<b>Material Type</b>	Standard
<b>UPC Code</b>	09635931207
<b>Standard Package</b>	25
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	25
<b>Weight / Ea.</b>	1.098 lbs

**Notes**  
ANSI C119.4, Class A connector, Consult Factory for conductor sizes not listed.

**Features**  
Individually bagged to seal out dirt before use.

**Compressed Product Number**  
GL409A

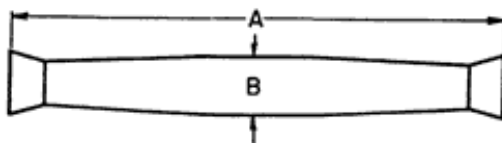

Ref Dimension A & B



Inside an Automatic Splice.

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.