


The Loop™



TL20

TL25



TL50

TL50 holds up to a 5" diameter bundle of CAT 5 or fiber optic cable!

The **LOOP**™

Hanger for communications cable support. For CAT 5, 6, 7 cable and fiber optic cable.

FEATURES AND BENEFITS


- Easy to use...cheaper than trays!
- Flexible and non-metallic
- Holds 2" to 5" diameter bundle of CAT 5 or fiber optic cable—without damaging the cable.
- Available with or without UV rating
- Versatile mounting—rotates to any angle!
- TL25 holds the same amount of cable as a J-hook, at half the cost!

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	LOOP SIZE	# CAT 5 CABLES	UNIT PKG	STD PKG	DIM A	DIM B	LOAD RATING
TL20	38084	2"	60	100	100	11.375	.652	25
TL25	38085	2-1/2"	100	50	50	12.250	1.500	25
TL2520	22031	2-1/2"	100	20	20	12.250	1.500	25
TL50	38086	5"	300	25	25	22.500	5.000	75
TL20P*	38087	2"	60	100	100	11.375	.652	25
TL25P*	38088	2-1/2"	100	50	50	12.250	1.500	25
TL50P*	38089	5"	300	25	25	22.500	5.000	75


*"P" indicates UV Rated.

PATENTED.

Note: Listed for use in environmental air handling spaces per 2014 NEC code requirements 300.22(c).

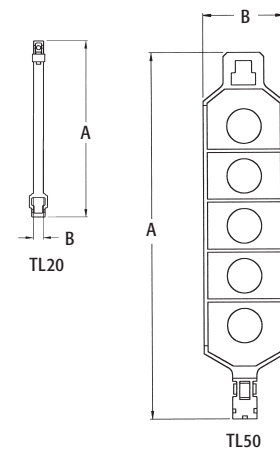

INSTALLATION SHOTS (TL50 SHOWN)

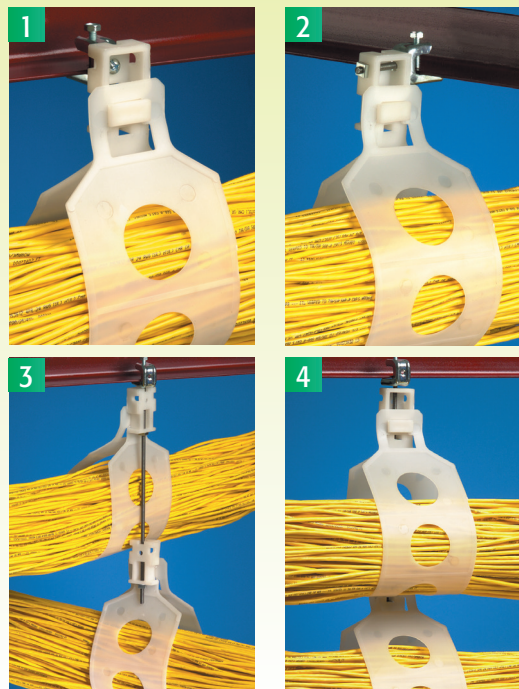

Single Hanger

1. Single LOOP mounted parallel to beam.
2. Single LOOP mounted perpendicular to beam.

Multiple Hangers

3. Stacked—perpendicular mounting
4. Stacked—parallel mounting

Scan For Video

