

# OVFL 2RH

## 2-Head LED Security Floodlight

### Performance & Value Combined

The OVFL 2RH LED security floodlight provides more light at an attractive cost providing the best combination of performance and value. Delivering 1,770 lumens, at only 20 inputs watts, the OVFL 2RH replaces up to (1) 150W par incandescent lamp offering 87% energy savings. The standard photocell offers a no-hassle, cost effective solution for any application requiring reliable dusk-to-dawn security lighting. This compact form features two heads allowing for more flexibility in application versus traditional single head solutions.

- Replaces: Up to (1) 150W PAR lamp
- Lumens: 1,770
- Input Watts: 20W
- Voltage: 120V
- Color Temperature: 4000K
- Expected Service Life: Approximately 10 years (35,000 hours<sup>1</sup>)
- Mounting: Easily mounts to ceiling or wall on a recessed junction box
- Ideal for residential and commercial applications





<sup>1</sup> LED lifespan based on IESNA LM-80-08 results and calculated per IESNATM-21-11 methodology.

# OVFL LED 2HR Floodlight

## Ordering Information

EXAMPLE: OVFL LED 2RH 40K 120 PE DDB HP17

OVFL											
Series		Lightheads		Color Temperature		Voltage		Control Options		Finish	
OVFL LED	LED Floodlight	2RH	2 Heads, Round	40K	4000K <sup>1</sup>	120	120V	PE	PE 120V Button Photocell	DDB HP17	Dark Bronze
										WH HP17	White

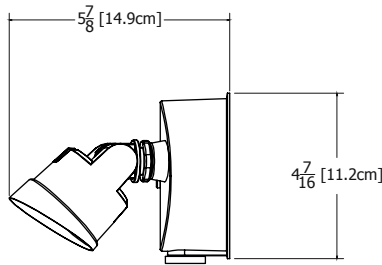

## Need more out of your LED luminaires?

**You replace**

150W PAR  
Incandescent  
**150 Watts**

**You save**

\$52 per year or 87%  
energy savings<sup>2</sup>

**You win**

Luminaire pays for  
itself in less than  
1 year!

### Notes

- 1 Correlated Color Temperature (CCT) shown is nominal per ANSI C78,377-2008.
- 2 Based on 10 hours operation per day and energy costs of \$.11 per kWh. Savings from energy only, not including maintenance costs.



Visit [www.lithonia.com](http://www.lithonia.com) for more information