






ENCLOSURE FOR 22MM PROGRAM PLASTIC VERSION 3  
 COMMAND POSITIONS GRAY TOP PART !!! Phased-out product !!!  
 SIRIUS ACT 3SU1 is successor Preferred successor type is  
 >>3SU1803-0AA00-0AB1<<





Figure similar

Enclosure	
<b>Design of the housing</b>	Empty enclosure for command and signaling devices
<b>Shape of the enclosure front</b>	rectangular
<b>Material of the enclosure</b>	plastic
<b>Number of command points</b>	3
<b>Product component</b>	
• protective collar	No
<b>Color</b>	
• of top part of the enclosure	grey
<b>Delivery state</b>	
• as a kit	No
• pre-wired on strip terminal	No
<b>Mounting type of the enclosure</b>	Vertical / horizontal
Actuator	
<b>Product feature</b>	
• lockout	No
<b>Product extension optional Light source</b>	Yes

Front ring	
Product component front ring	No
General technical data	
Product function	
• positive opening	No
• EMERGENCY STOP function	No
Product component	
• Light source	No
• Stand/pedestal	No
Protection class IP	IP65
Vibration resistance	
• acc. to IEC 60068-2-6	20 ... 200 Hz: 5g
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	S
Connections/Terminals	
Type of electrical connection on enclosure	Cable routing above, below / left, right, each 1 x M20
Ambient conditions	
Ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
Environmental category during operation acc. to IEC 60721	3K6
Installation/ mounting/ dimensions	
Mounting type	
• of contact blocks, socket, and accessories	Floor mounting / front mounting (1-pole)
Height	154 mm
Width	85 mm
Depth	64 mm
Shape of the installation opening	round
Mounting diameter	22 mm
Accessories	
Number of labels	3
Product component holder for 3 switching elements	No
Certificates/approvals	

General Product Approval		Declaration of Conformity	Test Certificates	Marine / Shipping
 CSA	 UL		 EG-Konf.	<a href="#">Special Test Certificate</a>  ABS

Marine / Shipping	other
 LRS	 PRS
	<a href="#">Environmental Confirmations</a> <a href="#">Confirmation</a>

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3803-0AA3>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3803-0AA3>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3SB3803-0AA3>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SB3803-0AA3&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3803-0AA3&lang=en)

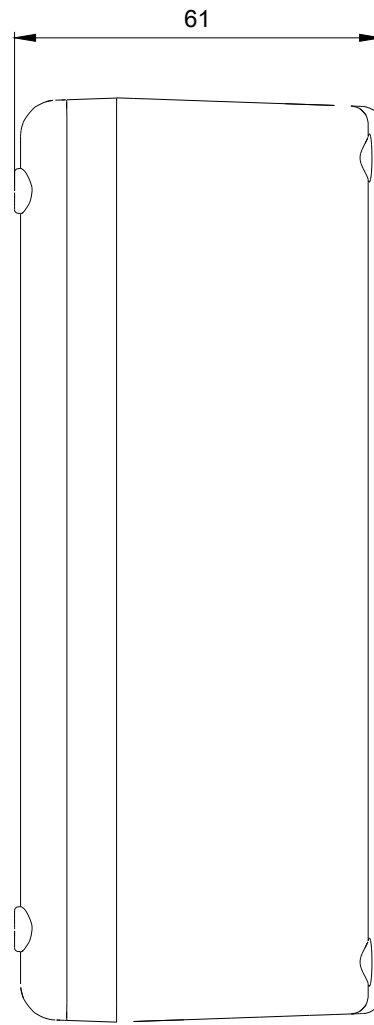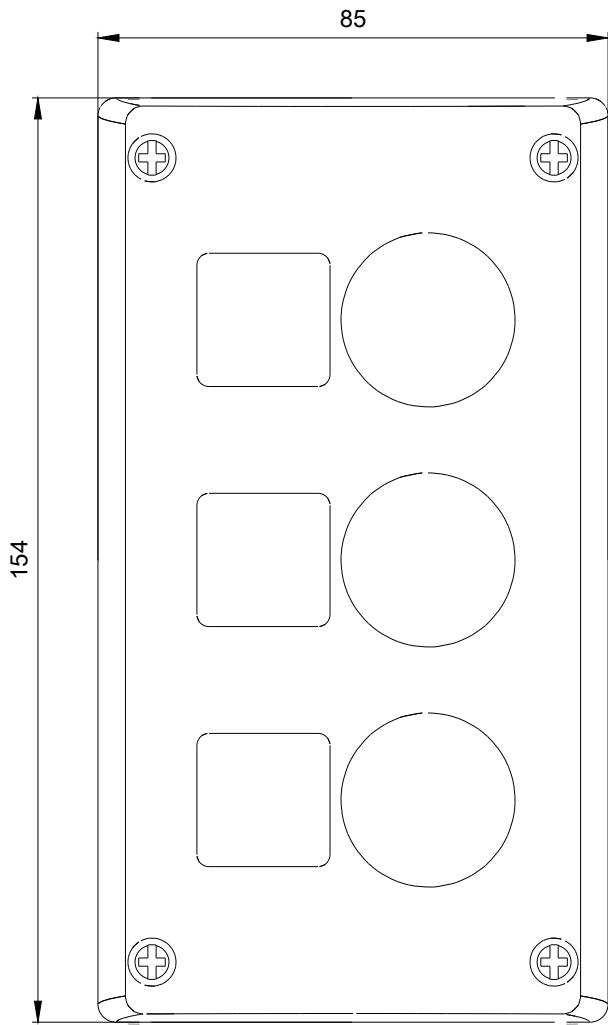

last modified:

04/30/2018 

W9.444; 3S  
W9.1667; 3S