



**Non-CTL Plug-On Replacement—Circuit Breakers, Type BRD—10 kAIC, 120/240 Vac**

BR2020

**Class Non-CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—Breakers Do Not Have Rejection Tab Feature****Type BR Duplex**

Single-Pole Requires One  
1-Inch (25.4 mm) Space  
10 per Shelf Carton

| Ampere<br>Rating | Catalog<br>Number | 120 Vac<br>Wire Size<br>Range<br>Cu/Al<br>65°C or 75°C |
|------------------|-------------------|--------------------------------------------------------|
| 15–15            | BR1515            | #14–4                                                  |
| 15–20            | BR1520            | #14–4                                                  |
| 20–15            | BR2015            | #14–4                                                  |
| 20–20            | BR2020            | #14–4                                                  |
| 30–30            | BR3030            | #14–4                                                  |
| 30–50            | BR3050            | #14–4                                                  |

**Type Brand BRD Quadplex Independent Trip**

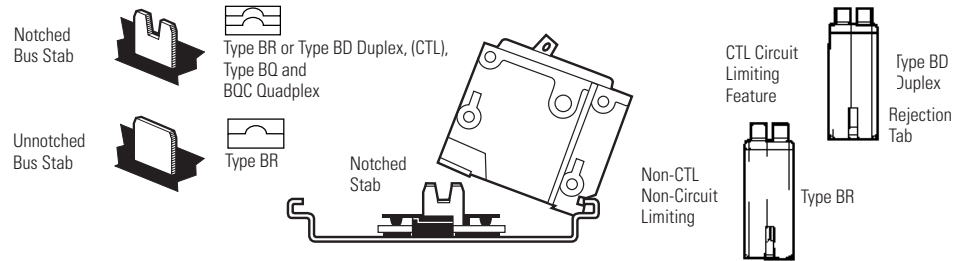
Two-Pole Requires Two  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

| 120/240 Vac<br>Ampere Rating<br>Outer Two-Pole<br>Independent Trip | 120/240 Vac<br>Center Two-Pole<br>Independent Trip | Catalog<br>Number |
|--------------------------------------------------------------------|----------------------------------------------------|-------------------|
| 15                                                                 | 15                                                 | BR415             |
| 20                                                                 | 20                                                 | BR420             |
| 30                                                                 | 30                                                 | BR430             |
| 20                                                                 | 30                                                 | BRD220230         |
| 30                                                                 | 40                                                 | BRD230240         |
| 30                                                                 | 50                                                 | BRD230250         |

**Type BRD Quadplex Common Trip  
Center and Outer Poles**

Two-Pole Requires Two  
1-Inch (25.4 mm) Spaces  
5 per Shelf Carton

| 120/240 Vac<br>Ampere Rating<br>Outer Two-Pole<br>Common Trip | 120/240 Vac<br>Center Two-Pole<br>Common Trip | Catalog<br>Number |
|---------------------------------------------------------------|-----------------------------------------------|-------------------|
| 15                                                            | 15                                            | BRDC215215        |
| 30                                                            | 30                                            | BRDC230230        |
| 30                                                            | 40                                            | BRDC230240        |
| 30                                                            | 50                                            | BRDC230250        |
| —                                                             | —                                             | —                 |
| —                                                             | —                                             | —                 |

**CTL and Non-CTL Breakers****Note**

Type BD Duplex, BQ and BQC Quadplex (CTL) circuit breakers conform to Section 384-15 of the latest National Electrical Code. Install breaker only in panel positions that have notched bus stabs.