


IDC SELECT® SHEAVES & BUSHINGS

QD® SHEAVES

HEAVY DUTY THREE AND FOUR GROOVE 3V QD® SHEAVES

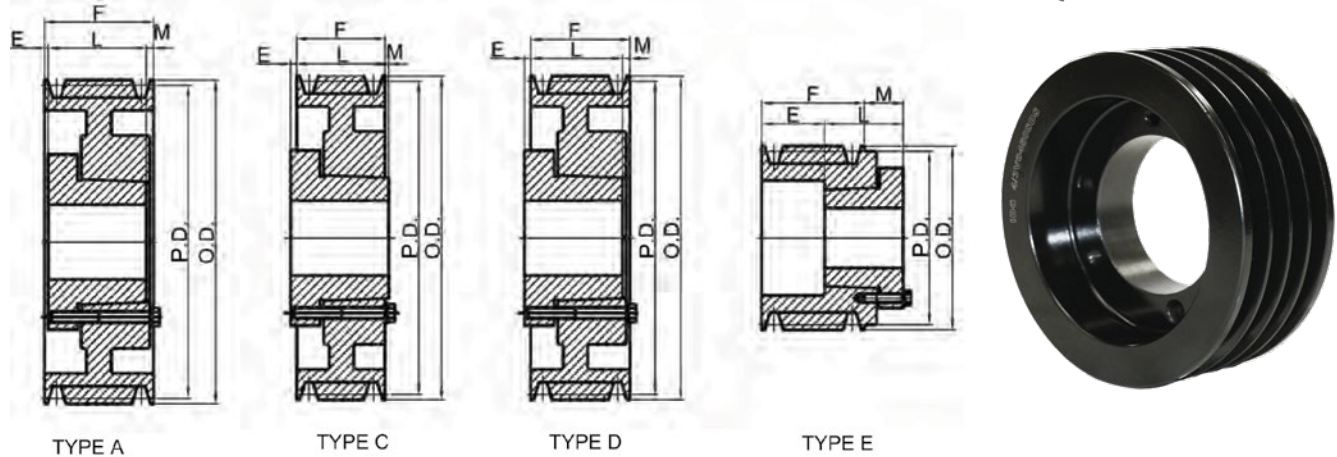

Diameters		3 Groove F = 1½							4 Groove F = 12⅝						
O.D.	P.D.	Part No.	Bush	Type*	E	L	M	Weight (lb)	Part No.	Bush	Type*	E	L	M	Weight (lb)
2.50	2.45	IDC 3-3V250JA**	JA	E-1	1 13/32	1	29/32	0.80	IDC 4-3V265JA**	JA	D-1	3/8	1	1 9/32	1.30
2.65	2.60	IDC 3-3V265JA**	JA	D-1	3/8	1	7/8	1.00	IDC 4-3V280JA**	JA	D-1	3/8	1	1 9/32	1.70
2.80	2.75	IDC 3-3V280JA**	JA	D-1	3/8	1	7/8	1.40	IDC 4-3V300SH†	SH	E-1	1 1/2	1 5/16	29/32	2.00
3.00	2.95	IDC 3-3V300SH†	SH	E-1	1 5/32	1 5/16	3 1/32	1.70	IDC 4-3V315SH†	SH	E-1	1 1/2	1 5/16	29/32	2.20
3.15	3.10	IDC 3-3V315SH†	SH	E-1	1 5/32	1 5/16	3 1/32	1.80							
3.35	3.30	IDC 3-3V335SH	SH	D-1	17/32	1 5/16	23/32	1.90	IDC 4-3V335SH	SH	D-1	17/32	1 5/16	1 1/8	2.30
3.65	3.60	IDC 3-3V365SH	SH	D-1	17/32	1 5/16	23/32	2.30	IDC 4-3V365SH	SH	D-1	17/32	1 5/16	1 1/8	2.80
4.12	4.07	IDC 3-3V412SH	SH	A-1	1/32	1 5/16	5/32	2.80	IDC 4-3V412SH	SH	A-1	5/32	1 5/16	7/16	3.40
4.50	4.45	IDC 3-3V450SDS	SDS	A-1	1/32	1 5/16	5/32	3.50	IDC 4-3V450SDS	SDS	A-1	5/32	1 5/16	7/16	4.00
4.75	4.70	IDC 3-3V475SDS	SDS	A-1	1/32	1 5/16	5/32	4.00	IDC 4-3V475SDS	SDS	A-1	5/32	1 5/16	7/16	4.60
5.00	4.95	IDC 3-3V500SDS	SDS	A-1	1/32	1 5/16	5/32	4.50	IDC 4-3V500SDS	SDS	A-1	5/32	1 5/16	7/16	5.20
5.30	5.25	IDC 3-3V530SDS	SDS	A-1	1/32	1 5/16	5/32	5.20	IDC 4-3V530SDS	SDS	A-1	5/32	1 5/16	7/16	5.80
5.60	5.55	IDC 3-3V560SDS	SDS	A-1	1/32	1 5/16	5/32	6.00	IDC 4-3V560SDS	SDS	A-1	5/32	1 5/16	7/16	6.80
6.00	5.95	IDC 3-3V600SDS	SDS	A-2	1/32	1 5/16	5/32	7.00	IDC 4-3V600SK	SK	D-1	5/32	1 15/16	1/8	8.30
6.50	6.45	IDC 3-3V650SDS	SDS	A-2	1/32	1 5/16	5/32	8.10	IDC 4-3V650SK	SK	D-1	5/32	1 15/16	1/8	10.00
6.90	6.85	IDC 3-3V690SDS	SDS	A-2	1/32	1 5/16	5/32	8.90	IDC 4-3V690SK	SK	D-1	5/32	1 15/16	1/8	11.90
8.00	7.95	IDC 3-3V800SK	SK	D-2	17/32	1 15/16	3/32	11.30	IDC 4-3V800SK	SK	D-2	5/32	1 15/16	1/8	13.00
10.60	10.55	IDC 3-3V1060SK	SK	D-3	17/32	1 15/16	3/32	14.00	IDC 4-3V1060SK	SK	D-3	5/32	1 15/16	1/8	16.50
14.00	13.95	IDC 3-3V1400SK	SK	D-3	17/32	1 15/16	3/32	21.60	IDC 4-3V1400SK	SK	D-3	5/32	1 15/16	1/8	22.50
19.00	18.95	IDC 3-3V1900SF	SF	D-3	19/32	2 1/16	1/32	32.10	IDC 4-3V1900SF	SF	D-3	7/32	2 1/16	1/16	35.00
25.00	24.95	IDC 3-3V2500SF	SF	D-3	19/32	2 1/16	1/32	50.00	IDC 4-3V2500SF	SF	D-3	7/32	2 1/16	1/16	57.00
33.50	33.45	IDC 3-3V3350SF	SF	D-3	19/32	2 1/16	1/32	78.00	IDC 4-3V3350E	E	C-3	2 1/32	2 3/4	3/16	84.00

*Suffix on type indicates construction:

1 = Solid 2 = Web 3 = Arm/Spoke

**Reverse mount sheave

† Includes cap screws to be used to install bushing.

Order bushings separately from pages 5-6.

Sheaves are precision machined from gray cast iron, statically balanced, painted with baked enamel finish and individually packaged.

Note: cast iron sheaves may not exceed 6,500 FPM. This speed does not specify if dynamic balancing (2 plane) is required. Contact IDC Select at info@IDCselect.com to verify whether dynamic balancing is required.