

# OVS

## Residential Wall Heater



With Surface Mounting Box

Recessed



### Features

#### Color

- Standard: white, almond.
- Optional (upcharge applicable): metallic silver, bronze, metallic charcoal, aluminum, semi-gloss black, sand.
- Custom colors available upon request.

#### Finish

- Standard: epoxy/polyester powder paint.

#### Voltage

- 120V, 208V, 240/208V, 1-phase.

#### Construction

- 20-gauge steel cabinet.
- 22-gauge steel front cover.
- High-limit temperature control with automatic reset.

#### Fan

- Quiet fan operating.
- 500W to 1000W; 40 cfm fan and 1250W to 2000W; 80 cfm fan.
- Factory-lubricated motor.

#### Heating element

- Durable tubular heating element with fins.
- Factory sealed element upon request.

#### Control

- Built-in thermostat available with a control knob or tamperproof.

*Note: If an electronic thermostat is used, it must be compatible with forced-air heaters.*

#### Installation

- Wall installation only.
- The air outlet should be installed at least 10 in. (25.4 cm) above floor.
- Quick installation with recess box mounting holes.
- Large wiring compartment.
- May be recessed in 2 in. X 3 in. stud partitions.
- Surface mounting box available.
- Tight fit with V-shaped recess box.


#### Warranty

- 5-year warranty against defects.

#### Application

- Entrance way, kitchen, bathroom, family room, basement.

Four mounting positions available. Pictures showing front panel. Directional vane air flow.

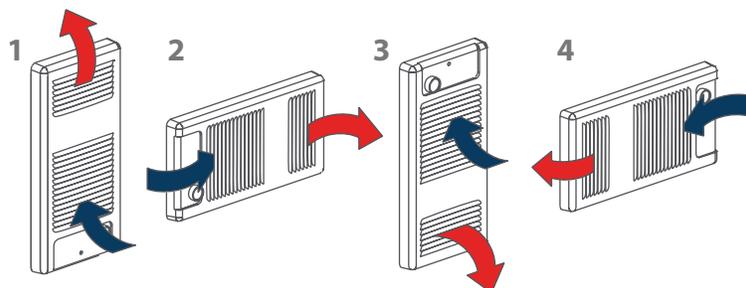

Product #	Product # with Built-In Thermostat	Volts	Watts	Weight	
				lb	kg
OVSU0502	OVSU0502BL-TB6	120	500	9.0	4.1
OVSU0752	OVSU0752BL-TB6	120	750	9.0	4.1
OVSU1002	OVSU1002BL-TB6	120	1000	9.0	4.1
OVSU1252	OVSU1252BL-TB6	120	1250	9.0	4.1
OVSU1502	OVSU1502BL-TB6	120	1500	9.0	4.1
OVSU0500	OVSU0500BL-TB26	240/208	500/375	9.0	4.1
OVSU0750	OVSU0750BL-TB26	240/208	750/563	9.0	4.1
OVSU1000	OVSU1000BL-TB26	240/208	1000/750	9.0	4.1
OVSU1250	OVSU1250BL-TB26	240/208	1250/938	9.0	4.1
OVSU1500	OVSU1500BL-TB26	240/208	1500/1125	9.0	4.1
OVSU2000	OVSU2000BL-TB26	240/208	2000/1500	9.0	4.1
OVSU2008	OVSU2008BL-TB26	208	2000	9.0	4.1

Options

Product #	Description	Factory Installed	Kit
OVS-BS	Surface mounting box	-	✓
OVS-DIS <sup>3</sup>	Disconnect switch, 20A at 277V max.	✓	✓
OVS-ES <sup>1</sup>	Factory sealed element	✓	-
OVS-TB6	Single-pole bi-metal thermostat	✓	✓
OVS-TB26 <sup>2</sup>	Double-pole bi-metal thermostat	✓	✓
OVS-TB6-AV	Single-pole bi-metal tamperproof thermostat	✓	✓
OVS-TB26-AV <sup>2</sup>	Double-pole bi-metal tamperproof thermostat	✓	✓

<sup>1</sup>The option "sealed element" increases the reliability of these in humid environments. It does not completely eliminate the leakage currents of metal sheathed heating elements.

<sup>2</sup>"Off" position.

<sup>3</sup>For the U.S. only: The nominal current of the unit must not exceed 80% of the capacity of the disconnect.

Add "BL" for white, "AM" for almond.

Optional colors shown in the color chart section are available upon request.

