

Timing relay, electronic on-delay 2 change-over contacts, 7 time ranges 0.05 s...100 h 12-240 V AC/DC at 50/60 Hz AC with LED, screw terminal



Product brand name	SIRIUS
Product designation	timing relay
Design of the product	slow-operating
Product type designation	3RP25

General technical data	
Product component	
• Relay output	Yes
• semi-conductor output	No
Product extension required remote control	No
Product extension optional remote control	No
Power loss [W] total typical	2 W
Insulation voltage	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
Test voltage for isolation test	2.5 kV
Degree of pollution	3
Surge voltage resistance rated value	4 000 V
Protection class IP	IP20

Shock resistance	
<ul style="list-style-type: none"> • acc. to IEC 60068-2-27 	11g / 15 ms
Mechanical service life (switching cycles)	
<ul style="list-style-type: none"> • typical 	10 000 000
Electrical endurance (switching cycles)	
<ul style="list-style-type: none"> • at AC-15 at 230 V typical 	100 000
Adjustable time	0.05 s ... 100 h
Relative setting accuracy relating to full-scale value	5 %
Thermal current	5 A
Recovery time	250 ms
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K
Relative repeat accuracy	1 %

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage 1 at AC	
<ul style="list-style-type: none"> • at 50 Hz 	12 ... 240 V
<ul style="list-style-type: none"> • at 60 Hz 	12 ... 240 V
Control supply voltage frequency 1	50 ... 60 Hz
Control supply voltage 1	
<ul style="list-style-type: none"> • at DC 	12 ... 240 V
Operating range factor control supply voltage rated value at DC	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • Full-scale value 	1.1
Operating range factor control supply voltage rated value at AC at 50 Hz	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • Full-scale value 	1.1
Operating range factor control supply voltage rated value at AC at 60 Hz	
<ul style="list-style-type: none"> • initial value 	0.85
<ul style="list-style-type: none"> • Full-scale value 	1.1
Inrush current peak	
<ul style="list-style-type: none"> • at 24 V 	0.3 A
<ul style="list-style-type: none"> • at 240 V 	5 A
Duration of inrush current peak	
<ul style="list-style-type: none"> • at 24 V 	0.3 ms
<ul style="list-style-type: none"> • at 240 V 	0.5 ms

Switching Function

Switching function	
• ON-delay	Yes
• ON-delay/instantaneous contact	No
• passing make contact	No
• passing make contact/instantaneous contact	No
• OFF delay	No
Switching function	
• flashing symmetrically starting with interval/instantaneous	No
• flashing symmetrically starting with interval	No
• flashing symmetrically starting with pulse/instantaneous	No
• flashing symmetrically starting with pulse	No
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
Switching function	
• star-delta circuit with delay time	No
• star-delta circuit	No
Switching function with control signal	
• additive ON delay	No
• passing break contact	No
• passing break contact/instantaneous	No
• OFF delay	No
• OFF delay/instantaneous	No
• pulse delayed	No
• pulse delayed/instantaneous	No
• pulse-shaping	No
• pulse-shaping/instantaneous	No
• additive ON delay/instantaneous	No
• ON-delay/OFF-delay/instantaneous	No
• passing make contact	No
• passing make contact/instantaneous contact	No
Switching function of interval relay with control signal	
• retrotriggerable with deactivated control signal/instantaneous contact	No
• retrotriggerable with activated control signal	No
• retrotriggerable with activated control signal/instantaneous contact	No
• retriggerable with deactivated control signal	No
Short-circuit protection	
Design of the fuse link	

- for short-circuit protection of the auxiliary switch required

fuse gL/gG: 4 A

Auxiliary circuit

Material of switching contacts	AgSnO ₂
Number of CO contacts	2
<ul style="list-style-type: none"> • delayed switching 	
Operating current of auxiliary contacts at AC-15	
<ul style="list-style-type: none"> • at 24 V 	3 A
<ul style="list-style-type: none"> • at 250 V 	3 A
Operating current of auxiliary contacts at DC-13	
<ul style="list-style-type: none"> • at 24 V 	1 A
<ul style="list-style-type: none"> • at 125 V 	0.2 A
<ul style="list-style-type: none"> • at 250 V 	0.1 A
Operating frequency with 3RT2 contactor maximum	5 000 1/h
Contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Contact rating of auxiliary contacts according to UL	R300 / B300
Influence of the surrounding temperature	1% in the whole temperature range to the set runtime
Power supply influence	1% in the whole voltage range to the set runtime
Switching capacity current with inductive load	0.01 ... 3 A

Inputs/ Outputs

Product function	
<ul style="list-style-type: none"> • at the relay outputs Switchover delayed/without delay 	No
<ul style="list-style-type: none"> • non-volatile 	No

Electromagnetic compatibility

EMI immunity	
<ul style="list-style-type: none"> • acc. to IEC 61812-1 	EN 61000-6-2
Conducted interference	
<ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 	2 kV network connection / 1 kV control connection
<ul style="list-style-type: none"> • due to conductor-earth surge acc. to IEC 61000-4-5 	2 kV
<ul style="list-style-type: none"> • due to conductor-conductor surge acc. to IEC 61000-4-5 	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge

Safety related data

Protection against electrical shock	finger-safe
Type of insulation	Basic insulation
Category acc. to EN 954-1	none

Connections/Terminals

Product function	
<ul style="list-style-type: none"> removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	
<ul style="list-style-type: none"> for auxiliary and control current circuit 	screw-type terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> finely stranded with core end processing 	1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> at AWG conductors solid 	1x (20 ... 12), 2x (20 ... 14)
<ul style="list-style-type: none"> at AWG conductors stranded 	1x (20 ... 12), 2x (20 ... 14)
Connectable conductor cross-section	
<ul style="list-style-type: none"> solid 	0.5 ... 4 mm ²
<ul style="list-style-type: none"> finely stranded with core end processing 	0.5 ... 4 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> solid 	20 ... 12
<ul style="list-style-type: none"> stranded 	20 ... 14
Tightening torque	0.6 ... 0.8 N·m
Design of the thread of the connection screw	M3

Installation/ mounting/ dimensions

Mounting position	any
<ul style="list-style-type: none"> (mounting type) 	screw and snap-on mounting onto 35 mm standard mounting rail
Height	100 mm
Width	22.5 mm
Depth	90 mm
Required spacing	
<ul style="list-style-type: none"> with side-by-side mounting <ul style="list-style-type: none"> forwards Backwards upwards downwards at the side 	0 mm 0 mm 0 mm 0 mm 0 mm
<ul style="list-style-type: none"> for grounded parts <ul style="list-style-type: none"> forwards Backwards upwards at the side downwards 	0 mm 0 mm 0 mm 0 mm 0 mm
<ul style="list-style-type: none"> for live parts <ul style="list-style-type: none"> forwards Backwards upwards 	0 mm 0 mm 0 mm

- downwards
- at the side

0 mm
0 mm

Ambient conditions

Installation altitude at height above sea level

- maximum 2 000 m

Relative humidity

- during operation 10 ... 95 %

Certificates/approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2525-1BW30>

Cax online generator





<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2525-1BW30>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2525-1BW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2525-1BW30&lang=en

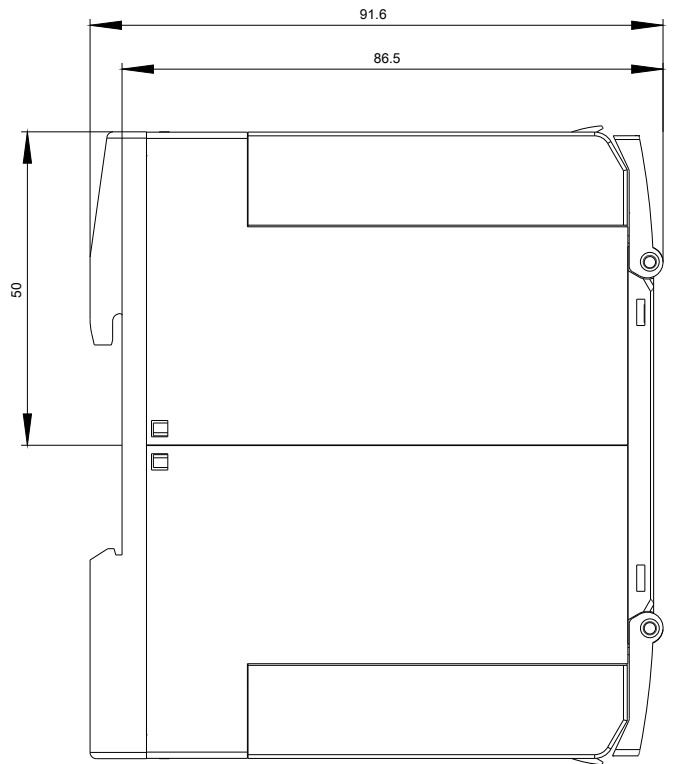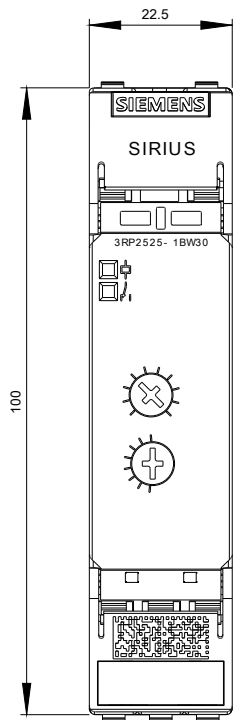

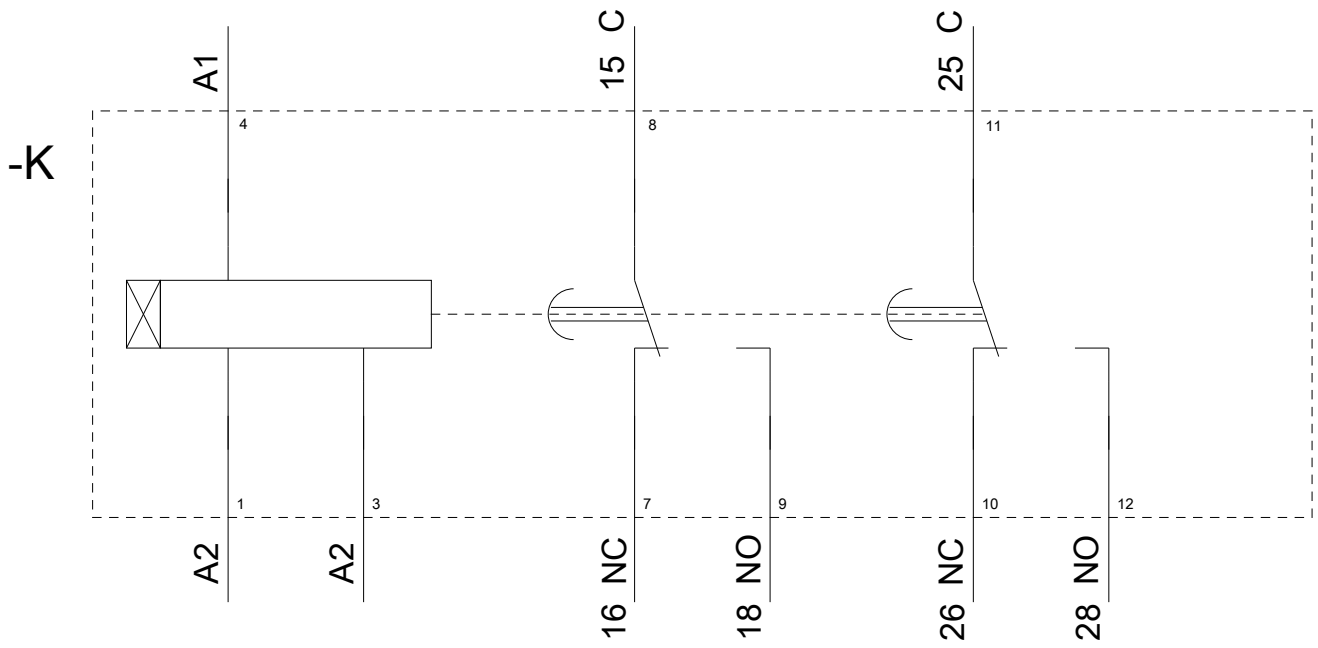

last modified:

04/30/2019