


Conduit Hose - Reinforced - US MSHA Series 7337

Designed for use as cable cover on underground mining equipment. Meets US MSHA standards for flame resistance and wall thickness and is embossed with US MSHA legend.

Tube: Black Synthetic Rubber
Cover: Black Synthetic Rubber
Reinforcement: Multiple textile plies
Temp. Range: -30° F to +180° F
Branding: PARKER/DAYCO SERIES 7337 PREMIUM CONDUIT HOSE
 FLAME RESISTANT MINE CONDUIT MSHA NO. 2G-2/10
 MADE IN USA
Brand Description: Embossed Brand

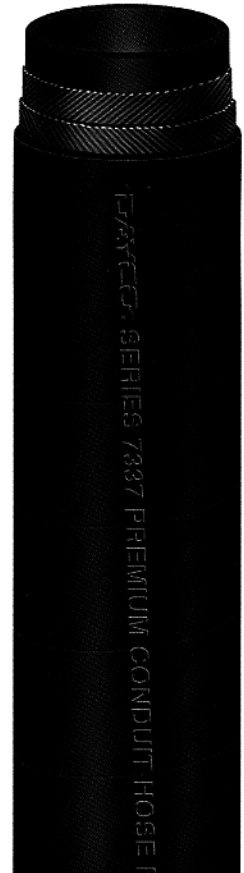

Part No.	ID (in.)	ID (mm)	Reinf. Plies	OD (in.)	OD (mm)	Approx. Wt. Per 100 Ft.
7337-382	3/8	9.5	2	0.807	20.5	25
7337-502	1/2	12.7	2	0.934	23.7	31
7337-632	5/8	15.9	2	1.063	27.0	37
7337-752	3/4	19.1	2	1.181	30.0	41
7337-872	7/8	22.2	2	1.308	33.2	47
7337-1002	1	25.4	2	1.434	36.4	52
7337-1132	1 1/8	28.6	2	1.560	39.6	58
7337-1252	1 1/4	31.8	2	1.686	42.8	64
7337-1382	1 3/8	34.9	2	1.811	46.0	69
7337-1502	1 1/2	38.1	2	1.929	49.0	73
7337-1752	1 3/4	44.5	2	2.183	55.4	85
7337-1882	1 7/8	47.6	2	2.308	58.6	90
7337-2002	2	50.8	2	2.435	61.8	96
7337-2252	2 1/4	57.2	2	2.687	68.2	107
7337-2382	2 3/8	60.3	2	2.809	71.3	112
7337-2502	2 1/2	63.5	2	2.933	74.5	117
7337-3002	3	76.2	2	3.435	87.2	139
7337-3502	3 1/2	90.0	2	3.976	101.0	162
7337-4002	4	102.0	2	4.449	113.0	182
7337-5002	5	127.0	2	5.433	138.0	225
7337-6002	6	152.4	2	6.437	163.5	271

LENGTHS: 50 ft. Some ID sizes may also be stocked in 100 ft. or 200 ft. lengths.
COUPLINGS: None required