
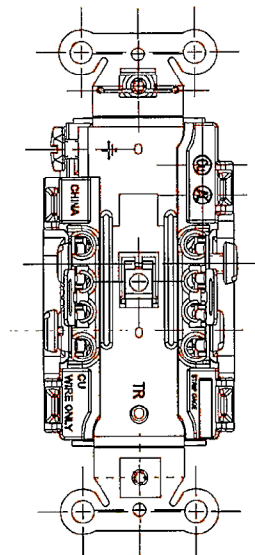
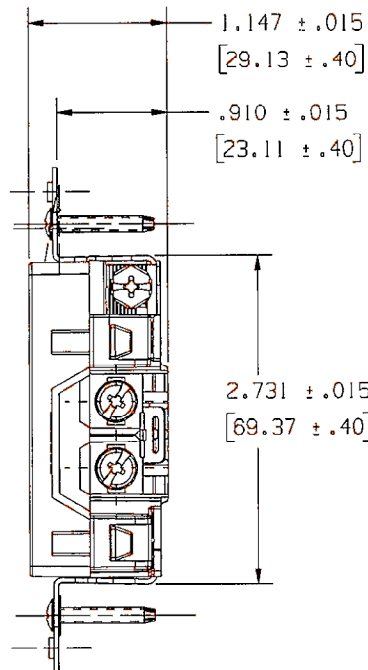


M-10838 2

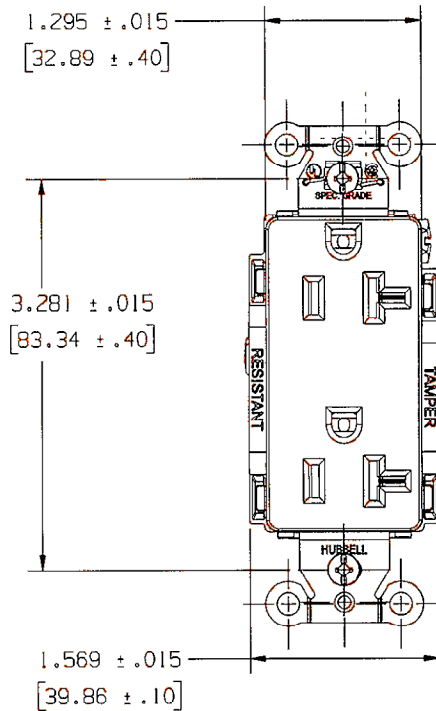

- NOTES:
- 1) DIMENSIONS ARE IN INCHES (MM).
 - 2) ALL DEVICES UL LISTED AND CSA CERTIFIED.
 - 3) TERMINALS ACCOMMODATE #14-#10 AWG COPPER WIRE ONLY.

CATALOG NUMBERS

	BROWN	IVORY	GRAY	WHITE	BLACK	ALMOND	BLUE	LIGHT ALMOND	RED	ORANGE	OFFICE WHITE
HUBBELL	DR20TR	DR201TR	DR20GRYTR	DR20WH1TR	DR20BLKTR	DR20ALTR	DR20BLTR	DR20LATR	DR20RTR	-----	-----

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
TOP	NYLON 6/6	SPI A-3
BASE	NYLON 6/6	SPI A-3
LINE CONTACTS	BRASS	
GROUND CONTACTS	BRASS	
CONTACT SCREW (NEU)	STEEL	NI PLT
CONTACT SCREW (HOT)	STEEL	
BRIDGE	.04 GALV STL	
GROUND SCREW	STEEL	GREEN
STAPLE	S.S.	
WASHER	PVC FILM	BLACK
MOUNTING SCREW	STEEL	ZINC PLT

2	ADDED CAT. NOS. DR20BLTR & DR20RTR TO TABLE. PER DCN 19208 DDL	DJP	11/16/12
1	RELEASED PER DCN# 14341 WRV		01/07/08
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE HUBBELL
20A 125V, 2P 3W
TAMPER RESISTANT
STYLELINE DUPLEX RECEPT.
BACK & SIDE WIRE

TOLERANCES UNLESS OTHERWISE SPECIFIED

.XX : ± .01
.XXX : ± .005
ANGLES : ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY WRV	APP. BY
TR. BY	SCALE 1:1
CHK. BY	DATE 3/07