


# ELECTRIC BASEBOARD HEATERS



**DIMENSIONS:**  
6 3/4" High, 2 7/8" Deep.  
Length varies with model. See Table Below.

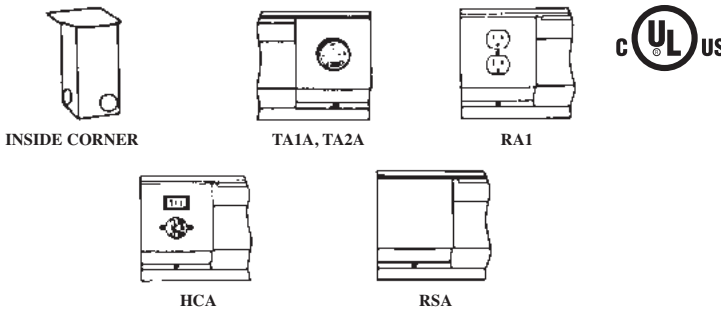

## APPLICATIONS

For use in residential construction such as single family homes, apartments, modular or mobile homes as well as commercial, industrial and institutional construction. Use as primary, secondary or supplemental heat for new construction or remodel applications.

## FEATURES

- Easily installed without disassembly.
- Lead wires allow quick field connection to either end of heater.
- Easy out knockouts at each end for convenient wiring.
- Chimney fin element design for maximum air circulation. Airflow is directed away from walls to help prevent wall soiling.
- UL listed for installation on wall at floor level with wall-to-wall carpeting. Heater stands unsupported during installation.
- Navajo White enamel finish retains attractive appearance and is compatible with all interior decors.
- Pre-notched mounting guide marks for fast and easy installation without disassembling the unit.
- Built-in cable clamp in both wiring compartments to restrain incoming cables without using additional hardware.
- Permanently attached copper grounding wire in each wiring compartment.

CATALOG NUMBER	UPC 0-98319	VOLTS	WATTS	LGTH.	SHIP WT. (LBS.)
2542W	73002 2	240/208	400/300	2'	5.2
25426W	73006 0	240/208	500/376	2'6"	6.3
2543W	73010 7	240/208	750/564	3'	7.5
2544W	73014 5	240/208	1000/752	4'	10
2545W	73018 3	240/208	1250/940	5'	11.5
2546W	73022 0	240/208	1500/1128	6'	14
2548W	73025 1	240/208	2000/1504	8'	18.5
25408W	72982 8	240/208	2500/1880	8'	18.5
2512W	73000 8	120	400	2'	5.2
25126W	73004 6	120	500	2'6"	6.3
2513W	73008 4	120	750	3'	7.5
2514W	73012 1	120	1000	4'	10
2515W	73016 9	120	1250	5'	11.5
2516W	73020 6	120	1500	6'	14
2502W	73001 5	208	400	2'	5.2
25026W	73005 3	208	500	2'6"	6.3
2503W	73009 1	208	750	3'	7.5
2504W	73013 8	208	1000	4'	10
2505W	73017 6	208	1250	5'	11.5
2506W	73002 1	208	1500	6'	14
2508W	73024 4	208	2000	8'	18.5
25008W	72981 1	208	2500	8'	18.5
2572W	73003 9	277/240/208	400/300/225	2'	5.2
25726W	73007 7	277/240/208	500/376/282	2'6"	6.3
2573W	73011 4	277/240/208	750/564/423	3'	7.5
2574W	73015 2	277/240/208	1000/752/564	4'	10
2575W	73019 0	277/240/208	1250/940/705	5'	11.5
2576W	73023 7	277/240/208	1500/1128/846	6'	14
2578W	73026 8	277/240/208	2000/1504/1128	8'	18.5
25708W	72983 5	277/240/208	2500/1880/1410	8'	18.5

### High Altitude

Baseboard Heater (mounted above 7500 ft.), add suffix "H" to catalog number.

**NOTE:** Eight foot length baseboards must be ordered in multiples of two pieces for shipment.

**NOTE:** Low watt density models and draft barrier models, do not require the "H" suffix for high altitude applications.

\* Add NW suffix for Northern White.

## Controls & Accessories for Heaters (Installs in either Junction Box)

CATALOG NUMBER	UPC 0-98319	DESCRIPTION	SHIP WT.
TA1AW	73041 1	SP Thermostat, rated 22A @ 120-277V	1 lb.
TA1TPAW	73042 8	Tamper resistant version of above.	1 lb.
TA2AW	73043 5	DP Thermostat, rated 22A @ 120-277V	1 lb.
TA2TPAW	73044 2	Tamper resistant version of above.	1 lb.
HCA2415/20W	73046 6	240V Load Transfer Switch, 20A	1 lb.
HCA1215/20W	73045 9	120V Load Transfer Switch, 20A	1 lb.
RSA1224	71480 0	120V/24V Transformer Relay, 25A	1 lb.
RSA2024	71485 5	208V/24V Transformer Relay, 25A	1 lb.
RSA2424	71490 9	240V/24V Transformer Relay, 25A	1 lb.
RSA2724	71495 4	277V/24V Transformer Relay, 22A	1 lb.
RA1W	73047 3	120V Duplex Receptacle	1 lb.
DSW2W	73049 7	Double Pole Disconnect Switch – rated 20A @ 120-277V	1 lb.
PR24	71367 4	Single Pole Power Relay, 24V Control rated 30A @ 120-240V, 23A @ 277V.	1 lb
PR120	71368 1	Same as above except 120V Control.	1 lb
ICAW	73050 3	Inside Corner	1 lb
RA1COMPW	73048 0	Duplex Receptacle Cover only – carton of 10	1 lb

## Filler Sections for 2500 Heaters

CATALOG NUMBER	UPC 0-98319	DESCRIPTION	SHIP WT.
FS12	73150 0	1 Ft. Filler Section	2 lbs.
FS24	73151 7	2 Ft. Filler Section	4 lbs.
FS36	73152 4	3 Ft. Filler Section	6 lbs.
FS48	73153 1	4 Ft. Filler Section	8 lbs.
FSJ2	73154 8	2-Inch Joiner Strip	1/2 lb.

**NOTE:** For Northern-white units, add NW suffix to catalog number. ex. (2544NW)

See Page 5 for blank sections.