

Superstrut®



Pipe Supports

Superstrut Pipe Straps

Superstrut Pipe Straps are designed to be twist inserted anywhere along the slot side of the channel. Pipes can be placed as closely as pipe couplings permit.


Some unique features of the straps include:

- Bolt head is combination slot and hex head for flexibility of attachment.
- Square nut is captivated on the shoulder for easy one-handed tightening.
- Straps are interchangeable with 1½" strut, for broader application.
- Straps are shipped assembled so counting and sorting are easier.
- Pipe or conduit sizes are shown on the strap for easy identification.



• All Superstrut Straps are pre-assembled for easy handling and sorting.

Design Loads



702 – Superstrut Straps for Rigid Conduit, IMC and Pipe

Standard Finishes – GoldGalv® brand,
Electro-Galvanized EG (Silver)

Cat. No.	Rigid Conduit or Pipe Size	O.D. Size (In.)	Steel Strap Thickness	Design Load (lbs.)	Std. Ctn.
702-3/8	¾"	0.675	14 ga.	750	100
702-1/2	½"	0.840	14 ga.	750	100
702-3/4	¾"	1.050	14 ga.	750	100
702-1	1"	1.315	14 ga.	750	100
702-1-1/4	1¼"	1.660	14 ga.	800	50
702-1-1/2	1½"	1.900	12 ga.	800	50
702-2-STR	2"	2.375	12 ga.	800	50
702-2-1/2	2½"	2.875	12 ga.	1000	50
702-3	3"	3.500	12 ga.	1650	50
702-3-1/2	3½"	4.000	11 ga.	1650	25
702-4	4"	4.500	11 ga.	1650	25
702-4-1/2	4½"	5.000	11 ga.	1650	25
702-5	5"	5.563	11 ga.	1650	25
702-6	6"	6.625	11 ga.	1650	10
702-8	8"	8.625	11 ga.	1650	10
702-10	10"	10.750	10 ga.	1650	25
702-12	12"	12.750	10 ga.	1650	25



Superstrut®

Standard Finish – GoldGalv®, unless otherwise stated.

Thomas & Betts

Superstrut®

Pipe Supports



700 Superstrut Straps for EMT

Standard Finishes – GoldGalv® brand,
Consult factory regarding other finishes and materials.

Cat. No.	EMT Size	O.D. Size (In.)	Steel Strap Thickness	Design Load (lbs.)	Std. Ctn.
700-3/8-STR	3/8"	0.577	14 ga.	750	100
700-1/2-STR	1/2"	0.706	14 ga.	750	100
700-3/4-STR	3/4"	0.922	14 ga.	750	100
700-1-STR	1"	1.163	14 ga.	750	100
700-1-1/4-STR	1 1/4"	1.510	14 ga.	750	50
700-1-1/2-STR	1 1/2"	1.740	12 ga.	800	50
700-2-STR	2"	2.197	12 ga.	800	50



701 Superstrut Straps for O.D. Tubing

Standard Finishes – GoldGalv® brand,
Electro-Galvanized (i.e.) 701-1-1/2EG (Silver)
Copper Plated CT701-1-1/2
Consult factory regarding other finishes and materials.


Cat. No.	Tubing O.D.	Steel Strap Thickness	Design Load (lbs.)	Std. Ctn.
701-1/4	1/4"	14 ga.	750	100
701-3/8	3/8"	14 ga.	750	100
701-1/2-STR	1/2"	14 ga.	750	100
701-5/8	5/8"	14 ga.	750	100
701-3/4	3/4"	14 ga.	750	100
701-7/8	7/8"	14 ga.	750	100
701-1-STR	1"	14 ga.	750	50
701-1-1/8	1 1/8"	14 ga.	1000	100
701-1-1/4	1 1/4"	14 ga.	1000	25
701-1-3/8	1 3/8"	14 ga.	1000	100
701-1-1/2	1 1/2"	14 ga.	1000	25
701-1-5/8	1 5/8"	14 ga.	1000	100
701-1-3/4	1 3/4"	12 ga.	1000	25
701-1-7/8	1 7/8"	12 ga.	1000	50
701-2	2"	12 ga.	1000	50
701-2-1/8	2 1/8"	12 ga.	1300	50
701-2-1/4	2 1/4"	12 ga.	1300	25
701-2-3/8	2 3/8"	12 ga.	1300	25
701-2-1/2	2 1/2"	12 ga.	1300	25
701-2-5/8	2 5/8"	12 ga.	1300	50
701-2-3/4	2 3/4"	12 ga.	1300	25
701-2-7/8	2 7/8"	12 ga.	1300	25
701-3	3"	12 ga.	1300	25
701-3-1/8	3 1/8"	12 ga.	1300	25
701-3-1/4	3 1/4"	12 ga.	1300	25
701-3-3/8	3 3/8"	12 ga.	1300	25
701-3-1/2	3 1/2"	12 ga.	1300	25
701-3-5/8	3 5/8"	11 ga.	1650	25
701-3-3/4	3 3/4"	11 ga.	1650	25
701-3-7/8	3 7/8"	11 ga.	1650	25

Standard Finish – GoldGalv®, unless otherwise stated.

Thomas & Betts

Superstrut®


Pipe Supports



701 Superstrut Straps for O.D. Tubing (Continued)

Standard Finishes – GoldGalv® brand,
Electro-Galvanized (Silver) - use EG suffix. (i.e.) 701-1-1/2EG
Copper Plated - use CT prefix, eg CT701-1-1/2

Cat. No.	Tubing O.D.	Steel Strap Thickness	Design Load (lbs.)	Std. Ctn.
701-4	4"	11 ga.	1650	25
701-4-1/8	4 1/8"	11 ga.	1650	25
701-4-1/4	4 1/4"	11 ga.	1650	25
701-4-3/8	4 3/8"	11 ga.	1650	25
701-4-1/2	4 1/2"	11 ga.	1650	10
701-4-5/8	4 5/8"	11 ga.	1650	10
701-4-3/4	4 3/4"	11 ga.	1650	10
701-4-7/8	4 7/8"	11 ga.	1650	10
701-4	5"	11 ga.	1650	25
701-5-1/8	5 1/8"	11 ga.	1650	10
701-5-1/4	5 1/4"	11 ga.	1650	10
701-5-3/8	5 3/8"	11 ga.	1650	10
701-5-1/2	5 1/2"	11 ga.	1650	10
701-5-5/8	5 5/8"	10 ga.	1650	10
701-5-3/4	5 3/4"	10 ga.	1650	10
701-5-7/8	5 7/8"	10 ga.	1650	10
701-6	6"	10 ga.	1650	10
701-6-1/8	6 1/8"	10 ga.	1650	10
701-6-1/4	6 1/4"	10 ga.	1650	10
701-6-3/8	6 3/8"	10 ga.	1650	10
701-6-1/2	6 1/2"	10 ga.	1650	10
701-6-5/8	6 5/8"	10 ga.	1650	10
701-6-3/4	6 3/4"	10 ga.	1650	10
701-6-7/8	6 7/8"	10 ga.	1650	10
701-8	8"	10 ga.	1650	10

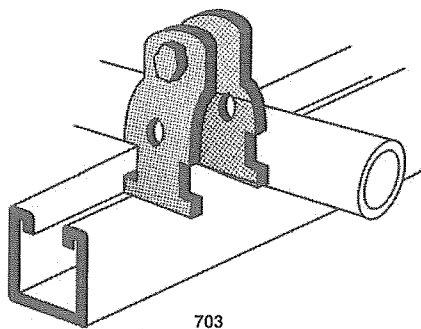

• For Rigid or IMC Conduit, Pipe and Electric Metal Tubing (EMT).

703 Universal Clamp

Standard Finishes – GoldGalv® brand,
Electro-Galvanized (Silver) - use EG suffix, (i.e.) 703-1-1/2EG

Cat. No.	Pipe O.D.	Material	Design Load (lbs.)	Std. Ctn.
703-1/2	.706 – .840	16 ga.	400	100
703-3/4	.932 – 1.050	14 ga.	550	100
703-1	1.163 – 1.315	14 ga.	550	100
703-1-1/4	1.508 – 1.660	14 ga.	800	50
703-1-1/2	1.738 – 1.900	14 ga.	800	50
703-2	2.195 – 2.375	14 ga.	800	50

J
Superstrut®

Thomas & Betts