



GE
Lighting

72262 - GE LFL UltraMax™ Professional Series Electronic High Efficiency Multivolt Instant Start Ballast

GE232MAXP-L/ULTRA (replaces GE232MAX-L/ULTRA)

- ☞ Energy saving high efficiency instant start electronic ballast (> 90%)
- ☞ Multi-Voltage Technology handles voltage from 120 to 277V
- ☞ UL Type CC Rating provides protection against arcing in electrical devices.
- ☞ Anti-Striation Control for better light quality, with no striations.
- ☞ Cold temperature -20F Minimum Starting Temperature

Product Photo



GENERAL CHARACTERISTICS

Ambient Temp [Max]	131 °F
Ambient Temp [Min]	-22 °F
Ballast Factor	Low (.77)
Ballast Type	High Efficiency Multivolt Instant Start
Case Temperature (Max)	70 °C
Line Voltage Regulation (+/-)	10%
Classification (Regulations)	cUL Listed FCC - CLASS A Non-Consumer NRCan UL Class P UL Listed UL Type 1 Outdoor UL Type CC UL Type HL NEMA Premium® Product is compliant with material restriction requirements of RoHS
Sound Rating	A (20-24 decibels)
Starting Method	Instant start
Product Technology	Linear Fluorescent
Lamp Wiring	Parallel
Power Factor Correction	Active

PRODUCT INFORMATION

Product Code	72262
Description	GE232MAXP-L/ULTRA (replaces GE232MAX-L/ULTRA)
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168722629
Standard Package GTIN	10043168722626
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168722629
Alternative Unit Of Measure	EACH
Standard Package Quantity	10
Ean UPC	043168722629
Standard Package GTIN	00043168722629
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
Sales Unit	Each
UCC	043168722629

DIMENSIONS

Weight	0.7 lb
Exit Type	
Remote Mount Distance	18.0 ft

Case Dimensions

Length	9.5in
Width	1.3in
Height	1.0in










Mounting Dimensions

Mount Length	9.0in
--------------	-------

Lead Color	Qty	Exit	Length (1 in.)
Black	1	Left	25in
Blue	2	Right	31in
White	1	Left	25in
Red	1	Left	37in

ELECTRICAL CHARACTERISTICS

SAFETY & PERFORMANCE

-  cUL_Listed
-  FCC_CS_NCons
-  NR_Can
-  UL_Cls_P
-  UL_Listed
-  UL_Type1_Out
-  UL_Type_CC
-  UL_Type_HL
-  NEMA_Pre

CAUTIONS & WARNINGS

Warning

Risk of Electric Shock



Properly ground ballast and fixture.

Turn power off before servicing--see instructions.

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)	Crest Factor (<=)	THD% (<=)	Min. Starting Temp (F/ C)
F17T8	1	120	17	0.14	0.79	5	0.99	1.5	11	-22
F17T8	1	277	17	0.08	0.79	5	0.8	1.5	36	-22
F17T8	2	120	27	0.23	0.79	3	0.99	1.5	8	-22
F17T8	2	277	27	0.1	0.79	3	0.95	1.5	12	-22
F25T12	1	120	24	0.2	0.8	3	0.99	1.5	9	0
F25T12	1	277	24	0.09	0.8	3	0.94	1.5	13	0
F25T12	2	120	41	0.35	0.8	2	0.99	1.5	6	0
F25T12	2	277	41	0.15	0.8	2	0.98	1.5	9	0
F25T8	1	120	23	0.19	0.8	3	0.99	1.5	9	-22
F25T8	1	277	23	0.09	0.8	3	0.93	1.5	13	-22
F25T8	2	120	39	0.33	0.8	2	0.99	1.5	6	-22
F25T8	2	277	39	0.14	0.8	2	0.97	1.5	10	-22
F28T8	1	277	25	0.1	0.77	3	0.94	1.5	13	60
F28T8	1	120	25	0.21	0.77	3	0.99	1.5	8	60
F28T8	2	120	43	0.36	0.77	2	0.99	1.5	6	60
F28T8	2	277	42	0.16	0.77	2	0.98	1.5	9	60
F32T8/WM	1	120	27	0.23	0.78	3	0.99	1.5	8	60
F32T8/WM	1	277	27	0.1	0.78	3	0.95	1.5	12	60
F32T8/WM	2	120	47	0.39	0.78	2	0.99	1.5	5	60
F32T8/WM	2	277	46	0.17	0.78	2	0.98	1.5	9	60
F32T8	1	120	28	0.23	0.77	3	0.99	1.5	8	-22
F32T8	1	277	28	0.11	0.77	3	0.95	1.5	12	-22
F32T8	2	120	48	0.42	0.78	2	0.99	1.5	5	-22
F32T8	2	277	48	0.19	0.78	2	0.98	1.5	8	-22
FE15T8	1	120	14	0.12	0.78	6	0.99	1.5	12	0
FE15T8	1	277	15	0.07	0.78	5	0.73	1.5	40	0
FE15T8	2	120	21	0.18	0.78	4	0.99	1.5	9	0
FE15T8	2	277	22	0.09	0.78	4	0.93	1.5	13	0
F32T8/25W	1	277	22	0.0	0.77	4	0.97	1.5	10	60
F32T8/25W	2	277	38	0.0	0.77	2	0.98	1.5	10	60
F25T8/WM	1	277	21	0.09	0.8	3	0.9	1.5	13	-22
F17T8/WM	2	120	24	0.21	0.81	3	1.0	0.5	8	-22
F17T8/WM	2	277	24	0.1	0.81	3	0.94	1.5	12	-22
F17T8/WM	1	120	16	0.14	0.81	5	0.99	1.5	11	-22
F17T8/WM	1	277	16	0.08	0.81	5	0.79	1.5	36	-22
F25T8/WM	2	277	34	0.13	0.81	2	0.97	1.5	10	-22
F29T8	2	120	46	0.39	0.78		1.0			
F29T8	1	120	28	0.23	0.78		1.0			
F29T8	2	277	46	0.17	0.78		0.98			
F29T8	1	277	28	0.11	0.78		0.95			

F31T8	2	120	49	0.41	0.77		1.0			
F31T8	1	120	28	0.24	0.77		1.0			
F31T8	1	277	28	0.11	0.77		0.95			
F31T8	2	277	48	0.18	0.77		0.98			
F26T8	1	120	26	0.22	0.77		1.0			
F26T8	2	120	42	0.36	0.76		1.0			
F26T8	2	277	42	0.16	0.76		0.98			
F26T8	1	277	26	0.1	0.77		0.95			

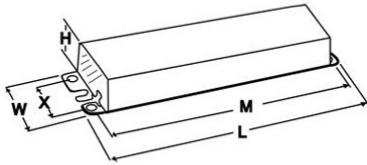

Jan 2, 2017 3:17:14 AM For additional information, visit www.gelighting.com