

Straight Blade Devices

15A, 277V AC, 2 Pole, 3 Wire Grounding

Receptacle

- Features
- Finder groove face
 - Auto ground clip

Ordering Information

Description	Device Color	UPC	Catalog Number
Flush duplex, back and	Brown	783585014241	HBL5302

Listings

UL Listed to UL498 File E1706

CSA Certified to C22.2 No. 42 File 280C

NEMA® WD-6 Compliant


Specifications

Face	Phenolic
Base	Phenolic
Power Contacts	.032 in. (.8) Bronze
Wire Clamps	Cold rolled steel
Terminal Screws	Plated brass
Mounting Strap	Steel
Automatic Self-grounding Clip	Stainless steel
Mounting Screws	Zinc plated steel

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Environmental	
Flammability	UL 94 V-0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

HUBBELL

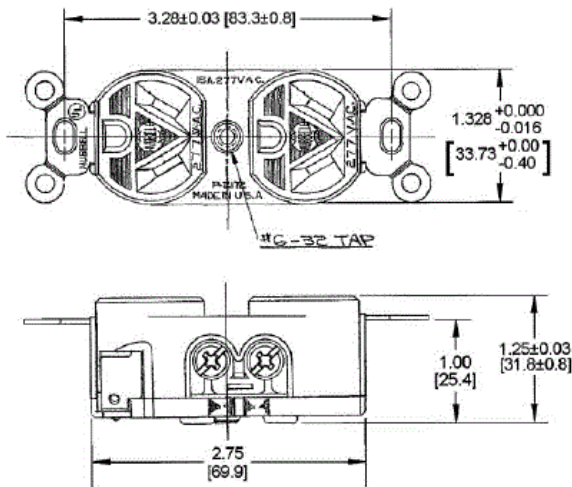

Online Resources

Customer Use Drawing

eCatalog

Installation Instructions

Accessories

Wallplate or Weatherproof Cover	Duplex Openin
Mating Plug	HBL5929

