
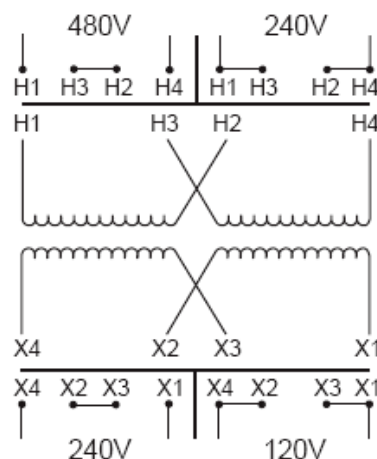
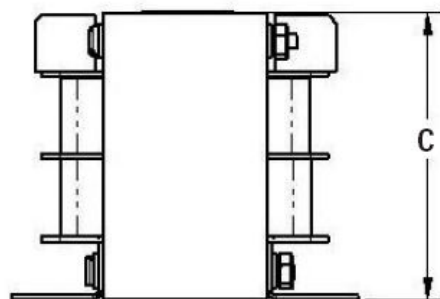


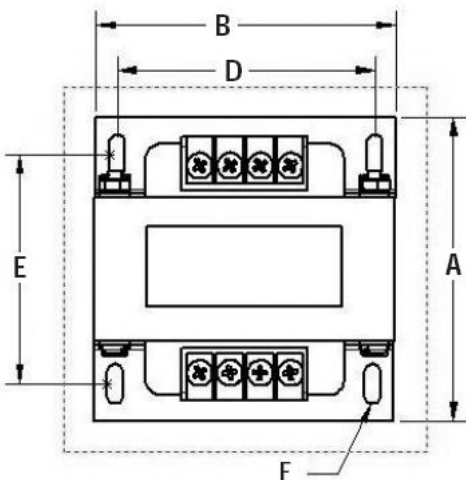

VA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
150	TB-83213	240 x 480	120/240		6 Lbs	1φ	60 Hz

Winding Rise:	80°C
Insulation:	130°C
Windings:	CU

TYPICAL PERFORMANCE DATA

Standards:	UL/CSA	Markings:	
------------	--------	-----------	--

Industrial Control Transformer

Typical Efficiency:	
Full Load Losses	
No Load Losses	

A	B	C	D	E	F				
4.92	3.75	3.40	3.13	2.81	.22 x .50				

Revisions

Primary Fuse Block

PL-112701

Secondary Fuse Kit

NA

ACME ELECTRIC

Type No.

Date: May 21, 2010

A

PRINTS
TO

**CONTROL
7**