


LD CTR 30S/42C MB 200A CU GEN READY N3R

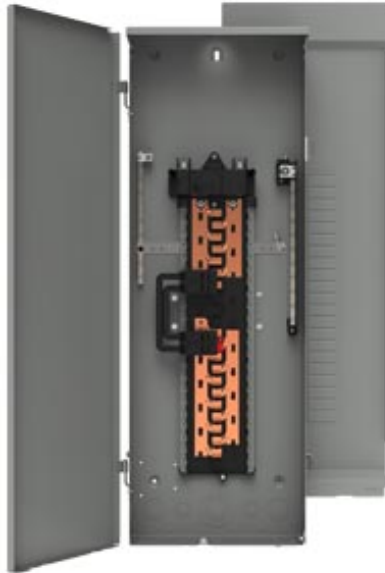

Configuration of the busbars	200A
Mounting type	Surface
Phase number	1
Suitability for operation	Residential

Electricity

Ampacity	200 A
Voltage between phase and Ground (GND) rated value	120 V
Voltage between phase and phase rated value	240 V

Switching capacity

Switching capacity current acc. to EN 60898 rated value	22000 A
---	---------

Model

product brandname	Siemens
Product sub brand name	Load Centers
Product type designation	1
Special product feature	Generator Ready

Mechanical Design

Number of width units for installation width	30
Size of the circuit-breaker	MB
Width [in]	4284 in
last modified:	06/05/2017