


White 4-bulb Fixture



Black 3-bulb Fixture



Bronze 4-bulb Fixture


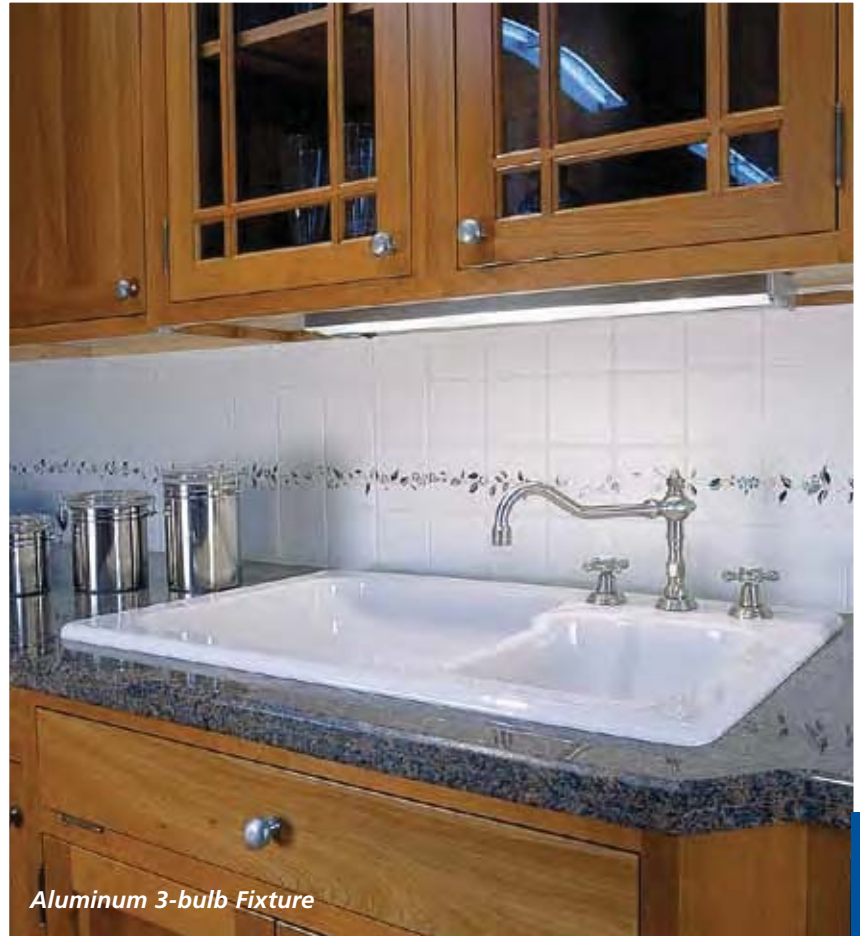


Aluminum 3-bulb Fixture


DESCRIPTION

Completely self-contained under counter light fixture with 10,000 hour average bulb life Xenon bulbs included. 120VAC in and out up to 66 bulbs. Numerous contractor preferred 1/2" knockouts in each fixture. Offered in five sizes and four fixture finishes. UL Listed Damp Location.

SCHEMATICS

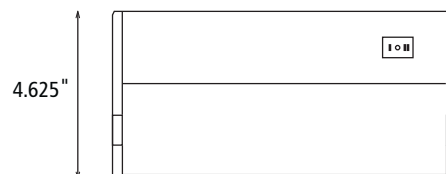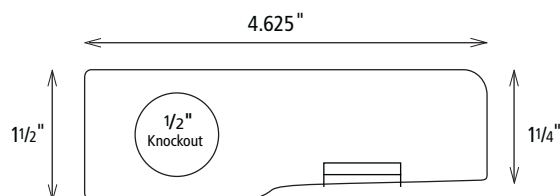

9"	XTL-1-XX/YY	One Bulb Xenon Task Light
17.5"	XTL-2-XX/YY	Two Bulb Xenon Task Light
26"	XTL-3-XX/YY	Three Bulb Xenon Task Light
34.5"	XTL-4-XX/YY	Four Bulb Xenon Task Light
38.5"	XTL-5-XX/YY	Five Bulb Xenon Task Light




SPECIFICATIONS

Voltage	120VAC input to fixture via hardwire or power cord. Integral 12V transformer per fixture
Bulb Specifications	18W wedge base Xenon (1-, 2-, 3-, 4- or 5-bulb fixtures)
Average Bulb Life	10,000 hours
Color Temperature	2800K +/-200K
Fixture Finish	White or black powder coating; bronze anodized, or natural aluminum
Construction	Aluminum extruded frame with injection molded sides for weight efficiency and consistency of finish
Lens	Frosted glass. Hinged to aluminum frame.
Wiring Options	Hardwire or power cord options. Hardwire option can be parallel wired ("daisy chained") up to 1188 watts (66 bulbs). One wire between each fixture completes chain. No custom cord required. Check local code and NEC.
Dimming	Hi/Lo switch per fixture, or dims with standard electronic low voltage dimmer on primary.
Agency Approval	UL listed and labeled. Damp Location.
Warranty	One year. See back cover for details.


FEATURES

- Xenon Bulbs
 - 10,000-hour average bulb life
 - Four times the bulb life of Halogen
 - Burns significantly cooler than Halogen
 - No harmful UV rays
 - Safer, low pressure bulbs
 - Replacement lamps half the cost of 120V Halogen
 - Dimmable
- Frosted glass diffuser with simple hinged push-to-open lens requires no tools to relamp
- White reflectors in all 6 color options
- Captive Mounting Screw
- Power Cord Option
- Numerous 1/2" knock-outs on sides and back make it easy to install 120V hard wire
- Integral hi-lo dimmer switch
- Push-in connectors included for ease of power input
- Lightweight extruded aluminum frame for consistent finish. Available in 4 colors and 5 fixture lengths.
- Integral 12V electronic transformer in each fixture. Plus 120VAC input/output allows fixtures to be daisy chained up to 66 bulbs per 15A tap.



PHOTOMETRICS

Under Cabinet Applications

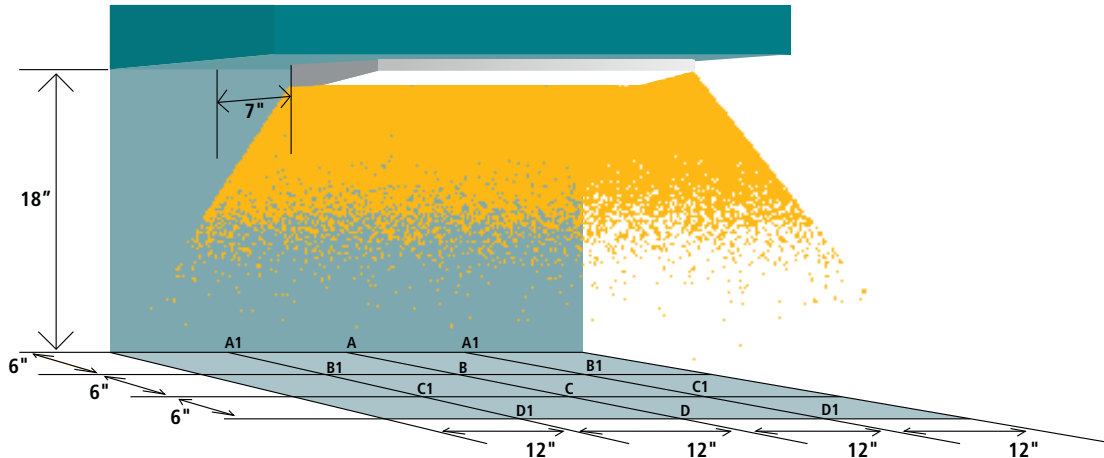

3 LED Module Task Star (Model no. LTS-3-HW/WH) Lumens=446 Watts=15.6

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	86.2	58.3	91.0	61.4	75.2	51.4	54.7	38.2

LED Tape Light (Model no. LTP-3-WW) Lumens=939 Watts=24.1

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	138	111	144	116	121	97.9	92.8	74.7

LED Thin Star (Model no. LTH-12-XX) Lumens=248 Watts=6.4

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	50.3	28.4	53.9	30.3	46.2	26.6	35.0	20.9

LED Mini Star II (Model no. LMSII-F-XX) Lumens=172 Watts=3.26

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	43.2	17.2	45.5	17.8	37.6	15.3	27.4	12.2

Xenon Task Light (Model no. XTL-3-HW/WH) Lumens=308 Watts=54

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	21.3	15.6	35.5	25.1	43.0	30.5	36.5	26.9

Xenon Mini Light (Model no. XML-F-XX) Lumens=131 Watts=18

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	25.8	11.2	32.9	12.5	23.4	9.9	11.4	6.1

LED Hard Strip (Model no. LV-HS-NW-24T2-2Y) Lumens=367 Watts=6

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	70.93	47.97	74.88	50.52	61.88	42.30	45.01	31.43

LED Puck Lights (Model no. LP-X-YY) Lumens=125 Watts=2.9

Kitchen Cabinet Photometrics H=18"

GRID LOCATION:	A	A1	B	B1	C	C1	D	D1
ILLUMINANCE IN FOOTCANDLES:	18.2	8.3	30.0	13	26.1	11.1	15.0	7.0