

ELECTRONIC FLUORESCENT BALLASTS




For 17W T8 Lamps

HIGH POWER FACTOR SOUND RATED A



No. of Lamps	Input Volts	Lamp Starting Method	Ballast Family	Catalog Number	Input Power ANSI (Watts)	Ballast Factor	Max. THD %	Line Current (Amps)	Min. Starting Temp. (°F/°C)	Dim.	Wiring Dia.			
F17T8, FBO16T8 (17W)														
3	120	IS	AmbiStar [‡]	REB-4P32-SC	44	0.81	135	0.87	0/-18	B	*66			
	120-277		Centium	ICN-3P32-N	48	0.92	15	0.39-0.17	0/-18	N	65			
				ICN-4P32-N	53	1.04	15	0.45-0.20			*66			
		IS	Optanium	IOP-3P32-LW-N	40	0.81	10	0.34-0.15	-20/-29	N	65			
				IOPA-3P32LW-N										
				IOP-3P32-N	45	0.90	10	0.38-0.17						
				IOPA-3P32-N										
				IOP-3P32-HL-N	59	1.22	10-15	0.49-0.22						
				IOPA-3P32-HL-N										
				IOP-4P32-LW-N	43	0.85	20	0.36-0.17		N	*66			
				IOPA-4P32-LW-N										
				IOP-4P32-N	49	1.00	15	0.41-0.18						
				IOPA-4P32-N										
				IOP-4P32-HL-SC	69	1.28	10	0.56-0.26						
				IOPA-4P32-HL-SC										
				PS	IOP-3PSP32-LW-SC	39	0.72	10	0.33-0.15	0/-18	B	178		
					IOP-3PSP32-SC	47	0.90	10	0.39-0.17					
					IOP-3PSP32-HL-SC	62	1.22	10	0.52-0.23					
					IOP-4PSP32-LW-SC	40	0.81	10	0.34-0.15					
					IOP-4PSP32-SC	47	1.00	10	0.40-0.18		G			
					IOP-4PSP32-HL-G	69	1.35	10	0.57-0.26					
		347	IS		Optanium	GOPA-3P32-LW-SC	39	0.81	10		0.12	-20/-29	B	65
						GOPA-3P32-SC	44	0.92			0.13			
				GOPA-4P32-LW-SC		45	0.82	0.13						
				GOPA-4P32-SC		50	1.00	0.15						
	GOP-3PSP32-SC			46		0.88	0.14							
	GOP-4PSP32-LW-SC			46		0.74	0.14							
PS	GOP-4PSP32-SC		46	0.93		0.14	0/-18			178				
	347-480					HOP-4PSP32-HL-G					69	1.32	0.21-0.15	

[‡] The above AmbiStar ballasts are normal power factor and labeled 'For Residential Use Only'

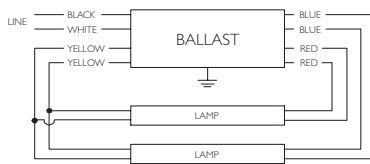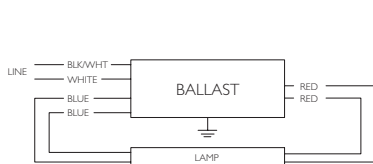

*INSULATE BLUE LEADS INDIVIDUALLY FOR 600 V

Refer to page 3-38 and 3-39 for dimensions
 Refer to page 3-41 for additional wiring diagrams
 Refer to pages 9-23 to 9-27 for lead lengths and shipping data