

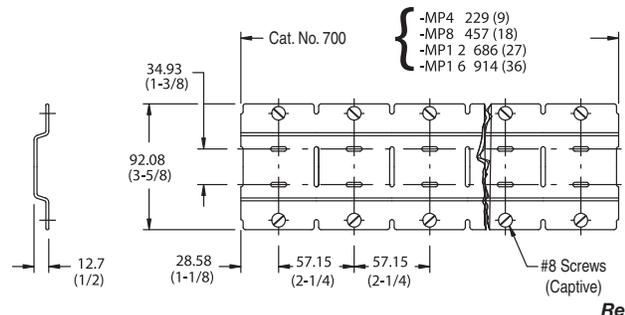
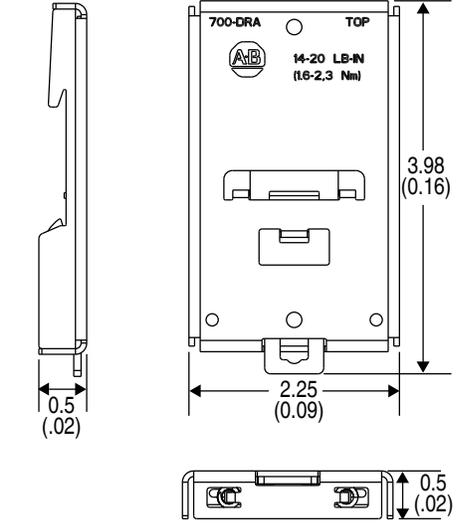
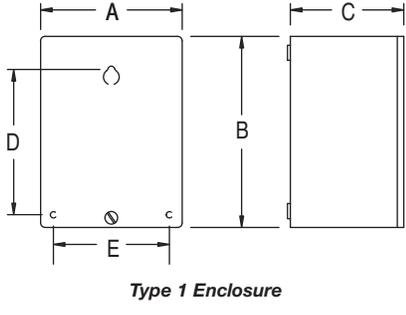
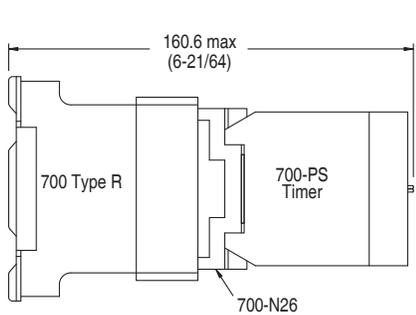


Dimensions are shown in millimeters (inches) shown. Dimensions are not intended to be used for manufacturing purposes.

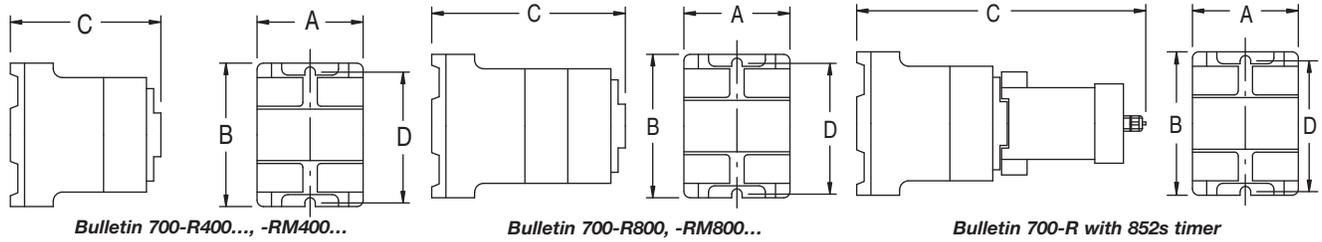

Secure the mounting strip with 2 screws at each end relay position. Use a minimum of one screw at the 3rd, 5th, 7th, etc., relay positions. Alternate between upper and lower horizontal slots.

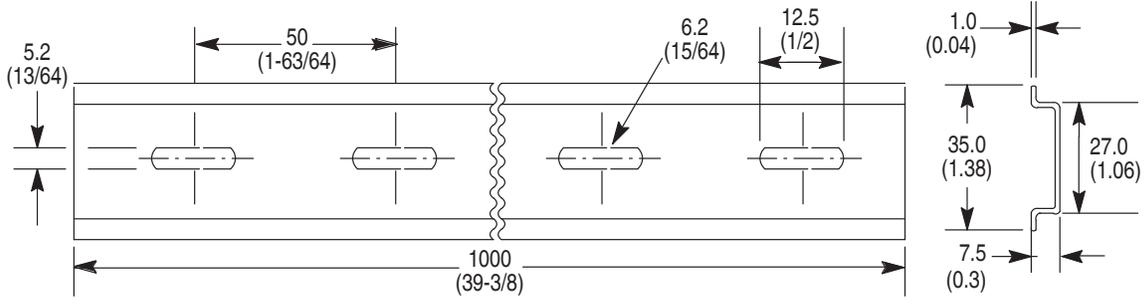

Cat. No. 199-DR1 DIN Mounting Rail Series B

		Bulletin 700-R, -RM Relays												
Type of Relay		No. of Poles	Drawing Number	Open Type Without Enclosures				Approx. Ship Wt. [kg (lb)]	Type 1 General Purpose Enclosure					Approx. Ship Wt. [kg (lb)]
				A Wide	B High	C Deep	D		A Wide	B High	C Deep	D	E	
R	Bulletin 700 and Bulletin 700DC	2...4	1	55.56 (2-3/16)	88.90 (3-1/2)	92.25 (3-3/8)	79.38 (3-1/8)	0.91 (2)	104.78 (4-1/8)	185.74 (7-5/16)	103.19 (4-1/16)	146.05 (5-3/4)	85.73 (3-3/8)	1.81 (4)
		5...8	2	55.56 (2-3/16)	88.90 (3-1/2)	111.13 (4-3/8)	79.38 (3-1/8)	1.02 (2-1/4)	112.71 (4-7/16)	228.60 (9)	120.65 (4-3/4)	206.38 (8-1/8)	92.08 (3-5/8)	2.49 (5)
R with Bulletin 852S Timer	Bulletin 700 and Bulletin 700DC	2...4	3	55.56 (2-3/16)	88.90 (3-1/2)	165.1 (6-1/2)	79.38 (3-1/8)	1.25 (2-3/4)	—	—	—	—	—	—
RM	Bulletin 700 and Bulletin 700DC	2...4	1	55.56 (2-3/16)	88.90 (3-1/2)	95.25 (3-3/8)	79.38 (3-1/8)	0.91 (2)	104.78 (4-1/8)	185.74 (7-5/16)	103.19 (4-1/16)	146.05 (5-3/4)	85.73 (3-3/8)	1.81 (4)
		5...8	2	55.56 (2-3/16)	89.90 (3-1/2)	111.13 (4-3/8)	79.38 (3-1/8)	1.02 (2-1/4)	112.71 (4-7/16)	228.60 (9)	120.65 (4-3/4)	206.38 (8-1/8)	92.08 (3-5/8)	2.49 (5)
RM with Bulletin 852S Timer	Bulletin 700 and Bulletin 700DC	2...4	3	55.56 (2-3/16)	88.90 (3-1/2)	165.1 (6-1/2)	79.38 (3-1/8)	1.25 (2-3/4)	—	—	—	—	—	—