


IDC SELECT® SPROCKETS

PLAIN BORE NO. 60 3/4" PITCH

60

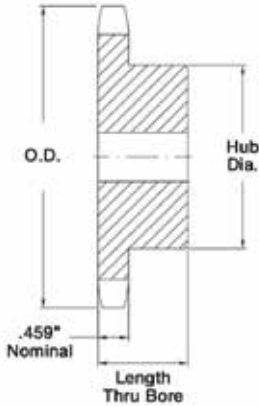


SPROCKETS

No. Teeth	Part No.	Outside Diameter	Type	Bore (in)		Hub (in)		Weight lbs (approx.)
				Stock	Rec. Max.	Diameter	Length Thru	
8	IDC H60B8	2.260	B	5/8	5/8	1 15/32	1 1/4	0.54
9	IDC H60B9	2.510	B	3/4	7/8	1 9/16	1 1/4	0.64
10	IDC H60B10	2.760	B	3/4	1 1/8	1 15/16	1 1/4	0.99
11	IDC H60B11	3.000	B	3/4	1 5/16	2 1/16	1 1/4	1.16
12	IDC H60B12	3.250	B	3/4	1 3/8	2 3/8	1 1/4	1.47
13	IDC H60B13	3.490	B	3/4	1 1/2	2 11/32	1 1/4	1.66
14	IDC H60B14	3.740	B	3/4	1 3/4	2 9/16	1 1/4	2.00
15	IDC H60B15	3.980	B	3/4	1 7/8	2 7/8	1 1/4	2.51
16	IDC H60B16	4.220	B	3/4	2	3 1/16	1 1/4	2.81
17	IDC H60B17	4.460	B	3/4	2 1/4	3 1/4	1 1/4	3.22
18	IDC H60B18	4.700	B	3/4	2 3/8	3 1/2	1 1/4	3.72
19	IDC H60B19	4.950	B	3/4	2 3/8	3 1/2	1 1/4	3.92
20	IDC H60B20	5.190	B	3/4	2 3/8	3 7/8	1 1/4	4.63
21	IDC H60B21	5.430	B	3/4	2 3/4	4	1 1/4	5.00
22	IDC H60B22	5.670	B	3/4	2 3/4	4	1 1/4	5.25
23	IDC H60B23	5.910	B	3/4	2 3/4	4	1 1/4	5.48
24	IDC H60B24	6.150	B	3/4	2 3/4	4	1 1/4	5.78
25	IDC H60B25	6.390	B	3/4	2 3/4	4	1 1/4	6.13
26	IDC H60B26	6.630	B	3/4	2 3/4	4	1 1/4	6.38
27	IDC H60B27	6.870	B	3/4	2 3/4	4	1 1/4	6.72
28	IDC H60B28	7.110	B	3/4	2 3/4	4	1 1/4	6.88
29	IDC H60B29	7.350	B	3/4	2 3/4	4	1 1/4	7.28
30	IDC H60B30	7.590	B	3/4	2 3/4	4	1 1/4	7.58
31	IDC H60B31	7.830	B	3/4	2 3/4	4	1 1/4	7.72
32	IDC H60B32	8.070	B	3/4	2 3/4	4	1 1/4	8.26
33	IDC H60B33	8.300	B	1	2 3/4	4	1 1/4	8.42
34	IDC H60B34	8.540	B	1	2 3/4	4	1 1/4	8.80

IDC SELECT® SPROCKETS

PLAIN BORE NO. 60 3/4" PITCH

60

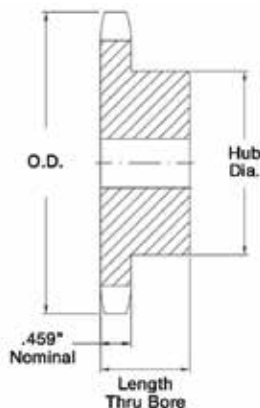


No. Teeth	Part No.	Outside Diameter	Type	Bore (in)		Hub (in)		Weight lbs (approx.)
				Stock	Rec. Max.	Diameter	Length Thru	
35	IDC H60B35	8.780	B	1	2¾	4	1¼	9.04
36	IDC H60B36	9.020	B	1	2¾	4	1¼	9.60
37	IDC H60B37	9.260	B	1	2¾	4	1¼	10.24
38	IDC H60B38	9.500	B	1	2¾	4¼	1¼	10.84
39	IDC H60B39	9.740	B	1	2¾	4¼	1¼	11.36
40	IDC H60B40	9.980	B	1	2¾	4¼	1¼	11.50
41	IDC H60B41	10.220	B	1	2¾	4¼	1¼	12.14
42	IDC H60B42	10.460	B	1	2¾	4¼	1¼	12.74
43	IDC H60B43	10.700	B	1	2¾	4¼	1¼	13.00
44	IDC H60B44	10.940	B	1½/16	2¾	4¼	1¼	13.88
45	IDC H60B45	11.180	B	1½/16	2¾	4¼	1¼	13.98
46	IDC H60B46	11.420	B	1½/16	2¾	4¼	1¼	14.60
47	IDC H60B47	11.650	B	1½/16	2¾	4¼	1¼	15.00
48	IDC H60B48	11.890	B	1½/16	2¾	4¼	1¼	15.82
49	IDC H60B49	12.130	B	1½/16	2¾	4¼	1¼	15.90
50	IDC H60B50	12.370	B	1½/16	2¾	4¼	1¼	17.66
51	IDC H60B51	12.610	B	1½/16	2¾	4¼	1¼	16.98
52	IDC H60B52	12.850	B	1½/16	2¾	4¼	1¼	17.93
53	IDC H60B53	13.090	B	1½/16	2¾	4¼	1¼	17.99
54	IDC H60B54	13.330	B	1½/16	2¾	4¼	1¼	21.60
55	IDC H60B55	13.570	B	1¼	2¾	4¼	1¾	21.14
56	IDC H60B56	13.810	B	1¼	2¾	4¼	1¾	21.88
57	IDC H60B57	14.040	B	1¼	2¾	4¼	1¾	22.26
58	IDC H60B58	14.280	B	1¼	2¾	4¼	1¾	22.80
59	IDC H60B59	14.520	B	1¼	2¾	4¼	1¾	23.86
60	IDC H60B60	14.760	B	1¼	2¾	4¼	1¾	25.22

IDC SELECT® SPROCKETS

FINISHED BORE NO. 60 3/4" PITCH

60

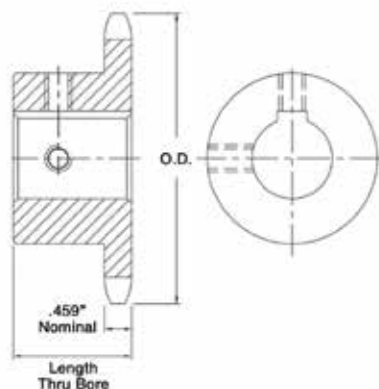


No. Teeth	Part No.	Outside Diameter	Length Thru Bore	Weight lbs (approx.)	Stock Finished Bores Includes Keyway and 2 Setscrews
9	IDC H60B9F	2.510	1 1/4	0.60	3/4 - 7/8 - 1
10	IDC H60B10F	2.510	1 1/4	0.70	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4
11	IDC H60B11F	3.000	1 1/4	0.90	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4
12	IDC H60B12F	3.250	1 1/4	1.30	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16
13	IDC H60B13F	3.490	1 1/4	1.30	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2
14	IDC H60B14F	3.740	1 1/4	1.60	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8
15	IDC H60B15F	3.980	1 1/4	1.70	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4
16	IDC H60B16F	4.220	1 1/4	2.10	3/4 - 7/8 - 1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
17	IDC H60B17F	4.460	1 1/4	2.40	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
18	IDC H60B18F	4.700	1 1/4	2.60	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
19	IDC H60B19F	4.950	1 1/4	3.40	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
20	IDC H60B20F	5.190	1 1/4	3.90	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
21	IDC H60B21F	5.430	1 1/4	4.40	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
22	IDC H60B22F	5.670	1 1/4	4.70	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
23	IDC H60B23F	5.910	1 1/4	5.00	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
24	IDC H60B24F	6.150	1 1/4	5.30	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
25	IDC H60B25F	6.390	1 1/4	5.40	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
26	IDC H60B26F	6.630	1 1/4	5.80	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
27	IDC H60B27F	6.870	1 1/4	6.30	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
28	IDC H60B28F	7.110	1 1/4	6.40	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
29	IDC H60B29F	7.350	1 1/4	6.90	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
30	IDC H60B30F	7.590	1 1/4	7.10	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
31	IDC H60B31F	7.830	1 1/4	7.40	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
32	IDC H60B32F	8.070	1 1/4	7.80	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
33	IDC H60B33F	8.300	1 1/4	8.20	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
34	IDC H60B34F	8.540	1 1/4	8.50	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
35	IDC H60B35F	8.780	1 1/4	8.80	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16
36	IDC H60B36F	9.020	1 1/4	9.20	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16 - 2 - 2 3/16 - 2 7/16
37	IDC H60B37F	9.260	1 1/4	9.90	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16 - 2 - 2 3/16 - 2 7/16
38	IDC H60B38F	9.500	1 1/4	10.50	1 - 1 1/8 - 1 1/16 - 1 1/4 - 1 3/8 - 1 7/16 - 1 1/2 - 1 5/8 - 1 3/4 - 1 15/16 - 2 - 2 3/16 - 2 7/16

NOTE: KEYWAY IS ON CENTER LINE OF TOOTH.

IDC SELECT® SPROCKETS

FINISHED BORE NO. 60 3/4" PITCH

60

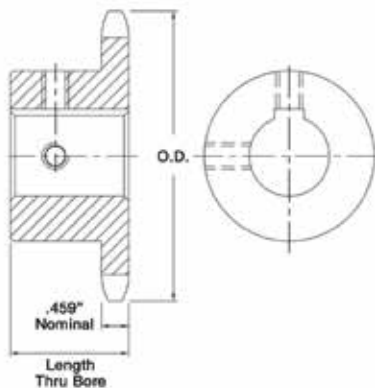


No. Teeth	Part No.	Outside Diameter	Length Thru Bore	Weight lbs (approx.)	Stock Finished Bores Includes Keyway and 2 Setscrews																									
39	IDC H60B39F	9.740	1¼	10.90	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
40	IDC H60B40F	9.980	1¼	11.20	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
41	IDC H60B41F	10.220	1¼	11.80	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
42	IDC H60B42F	10.460	1¼	12.40	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
43	IDC H60B43F	10.700	1¼	13.00	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
44	IDC H60B44F	10.940	1¼	13.50	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
45	IDC H60B45F	11.180	1¼	13.80	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
46	IDC H60B46F	11.420	1¼	14.10	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
47	IDC H60B47F	11.650	1¼	14.60	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
48	IDC H60B48F	11.890	1¼	15.40	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
49	IDC H60B49F	12.130	1¼	16.40	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
50	IDC H60B50F	12.370	1¼	17.30	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
51	IDC H60B51F	12.610	1¼	18.30	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
52	IDC H60B52F	12.850	1¼	19.30	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
53	IDC H60B53F	13.090	1¼	20.30	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
54	IDC H60B54F	13.330	1¾	21.00	1	–	1⅝	–	1⅜	–	1¼	–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞	
55	IDC H60B55F	13.570	1¾	21.20									–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞
56	IDC H60B56F	13.810	1¾	21.30									–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞
57	IDC H60B57F	14.040	1¾	22.20									–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞
58	IDC H60B58F	14.280	1¾	23.00									–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞
59	IDC H60B59F	14.520	1¾	23.80									–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞
60	IDC H60B60F	14.760	1¾	25.00									–	1⅜	–	1⅞	–	1½	–	1⅝	–	1¾	–	1⅝⅙	–	2	–	2⅜	–	2⅞

NOTE: KEYWAY IS ON CENTER LINE OF TOOTH.

IDC SELECT® STANDARD SPROCKETS

SINGLE - TAPER-LOCK® NO. 60 3/4" PITCH

60

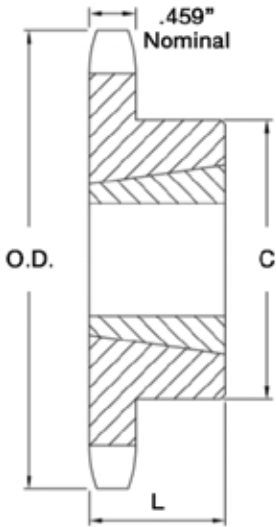


No. Teeth	Part No.	Bushing	Diameter		Max. Bore	Dimensions		Type	Weight lbs (approx.)	
			Outside Diameter	Pitch Diameter		L	C		Rim Only	Bushing Only
11	IDC H60BTL11	1008	3.004	2.662	1	7/8	1 13/16	B	0.6	0.3
12	IDC H60BTL12	1008	3.249	2.898	1	7/8	1 15/16	B	0.8	0.3
13	IDC H60BTL13	1210	3.493	3.134	1 1/4	1	2 15/32	B	0.8	0.6
14	IDC H60BTL14	1210	3.736	3.371	1 1/4	1	2 19/32	B	1.0	0.6
15	IDC H60BTL15	1610	3.979	3.607	1 5/8	1	2 25/32	B	1.0	0.9
16	IDC H60BTL16	1610	4.221	3.844	1 5/8	1	3	B	1.4	0.9
17	IDC H60BTL17	1610	4.462	4.082	1 5/8	1	3 1/4	B	1.8	0.9
18	IDC H60BTL18	1610	4.704	4.319	1 5/8	1	3 1/2	B	1.9	0.9
19	IDC H60BTL19	1610	4.945	4.557	1 5/8	1	3 21/2	B	2.2	0.9
20	IDC H60BTL20	2012	5.185	4.794	2	1 1/4	3 15/16	B	2.2	1.7
21	IDC H60BTL21	2012	5.426	5.032	2	1 1/4	4	B	2.5	1.7
22	IDC H60BTL22	2012	5.666	5.270	2	1 1/4	4	B	2.8	1.7
23	IDC H60BTL23	2012	5.907	5.508	2	1 1/4	4	B	3.1	1.7
24	IDC H60BTL24	2012	6.147	5.746	2	1 1/4	3 9/16	B	3.4	1.7
25	IDC H60BTL25	2012	6.387	5.984	2	1 1/4	3 9/16	B	3.7	1.7
26	IDC H60BTL26	2012	6.627	6.222	2	1 1/4	3 9/16	B	4.0	1.7
27	IDC H60BTL27	2012	6.867	6.416	2	1 1/4	3 9/16	B	4.3	1.7
28	IDC H60BTL28	2012	7.107	6.699	2	1 1/4	3 9/16	B	4.6	1.7
30	IDC H60BTL30	2012	7.586	7.175	2	1 1/4	3 9/16	B	5.2	1.7
32	IDC H60BTL32	2012	8.065	8.367	2	1 1/4	3 9/16	B	5.6	1.7
35	IDC H60BTL35	2012	8.783	8.605	2	1 1/4	3 9/16	B	6.4	1.7
36	IDC H60BTL36	2012	9.022	9.559	2	1 1/4	3 9/16	B	6.6	1.7
40	IDC H60BTL40	2012	9.980	10.036	2	1 1/4	3 9/16	B	8.3	1.7
42	IDC H60BTL42	2012	10.458	10.752	2	1 1/4	3 9/16	B	10.0	1.7
45	IDC H60BTL45	2012	11.175	11.467	2	1 1/4	3 9/16	B	11.5	1.7
48	IDC H60BTL48	2012	11.893	12.899	2	1 1/4	3 9/16	B	13.2	1.7
54	IDC H60BTL54	2517	13.327	14.330	2 1/2	1 3/4	4 1/4	B	17.1	3.5
60	IDC H60BTL60	2517	14.761	16.717	2 1/2	1 3/4	4 1/4	B	21.0	3.5

IDC SELECT® STANDARD SPROCKETS

SINGLE - TYPE QD® NO. 60 3/4" PITCH

60

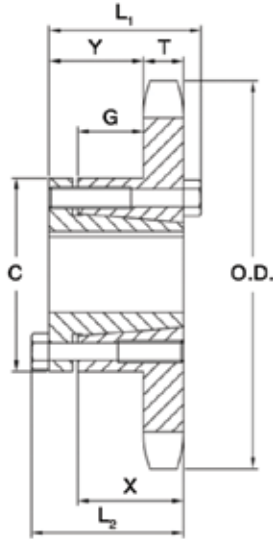

No. Teeth	Part No.	Bushing	Diameter		Type	Max. Bore	Dimensions							Weight lbs (approx.)	
			Outside Diameter	Pitch Diameter			L ₁	L ₂	C	Y	G	X	T	With Hub	Rim Only
11	IDC H60JA11	JA	3.000	2.662	B	1 1/4	1 1/8	1 1/8	2 1/16	35/64	1 1/64	5/8	0.459	1.36	0.46
12	IDC H60JA12	JA	3.250	2.898	B	1 1/4	1 1/8	1 1/8	2 1/16	35/64	1 1/64	5/8	0.459	1.50	0.60
13	IDC H60JA13	JA	3.490	3.134	B	1 1/4	1 1/8	1 1/8	2 1/16	35/64	1 1/64	5/8	0.459	1.66	0.76
14	IDC H60SH14	SH	3.740	3.371	B	1 5/8	1 7/16	1 7/16	2 11/16	5 1/64	23/64	13/16	0.459	1.88	0.88
15	IDC H60SH15	SH	3.980	3.607	B	1 5/8	1 7/16	1 7/16	2 11/16	5 1/64	23/64	13/16	0.459	2.08	1.08
16	IDC H60SH16	SH	4.220	3.844	B	1 5/8	1 7/16	1 7/16	2 11/16	5 1/64	23/64	13/16	0.459	2.26	1.26
17	IDC H60SDS17	SDS	4.460	4.082	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	2.38	1.38
18	IDC H60SDS18	SDS	4.700	4.319	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	2.56	1.56
19	IDC H60SDS19	SDS	4.950	4.557	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	2.76	1.76
20	IDC H60SDS20	SDS	5.190	4.794	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	3.00	2.00
21	IDC H60SDS21	SDS	5.430	5.032	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	3.20	2.20
22	IDC H60SDS22	SDS	5.670	5.270	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	3.44	2.44
23	IDC H60SDS23	SDS	5.910	5.508	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	3.70	2.70
24	IDC H60SDS24	SDS	6.150	5.746	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	3.94	2.94
25	IDC H60SDS25	SDS	6.390	5.984	B	2	1 1/2	1 1/2	3 3/16	55/64	19/64	3/4	0.459	4.24	3.24
26	IDC H60SK26	SK	6.630	6.222	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	6.18	4.18
27	IDC H60SK27	SK	6.870	6.460	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	6.52	4.52
28	IDC H60SK28	SK	7.110	6.699	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	6.72	4.72
30	IDC H60SK30	SK	7.590	7.175	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	7.34	5.34
32	IDC H60SK32	SK	8.070	7.652	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	8.10	6.10
35	IDC H60SK35	SK	8.780	8.367	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	9.42	7.42
36	IDC H60SK36	SK	9.020	8.605	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	9.70	7.70
40	IDC H60SK40	SK	9.980	9.559	B	2 5/8	2 1/8	2 1/8	3 7/8	1 27/64	5 1/64	1 1/4	0.459	11.56	9.56
42	IDC H60SF42	SF	10.460	10.036	B	2 15/16	2 1/4	2 1/4	4 5/8	1 35/64	5 1/64	1 1/4	0.459	13.78	10.78
45	IDC H60SF45	SF	11.180	10.752	B	2 15/16	2 1/4	2 1/4	4 5/8	1 35/64	5 1/64	1 1/4	0.459	15.40	12.40
48	IDC H60SF48	SF	11.890	11.467	B	2 15/16	2 1/4	2 1/4	4 5/8	1 35/64	5 1/64	1 1/4	0.459	17.26	14.26
54	IDC H60SF54	SF	13.330	12.899	B	2 15/16	2 1/4	2 1/4	4 5/8	1 35/64	5 1/64	1 1/4	0.459	20.02	17.02
60	IDC H60SF60	SF	14.760	14.331	B	2 15/16	2 1/4	2 1/4	4 5/8	1 35/64	5 1/64	1 1/4	0.459	23.76	20.76