


IDC SELECT® SHEAVES & BUSHINGS

QD® SHEAVES

HEAVY DUTY TWO AND THREE GROOVE 5V QD® SHEAVES

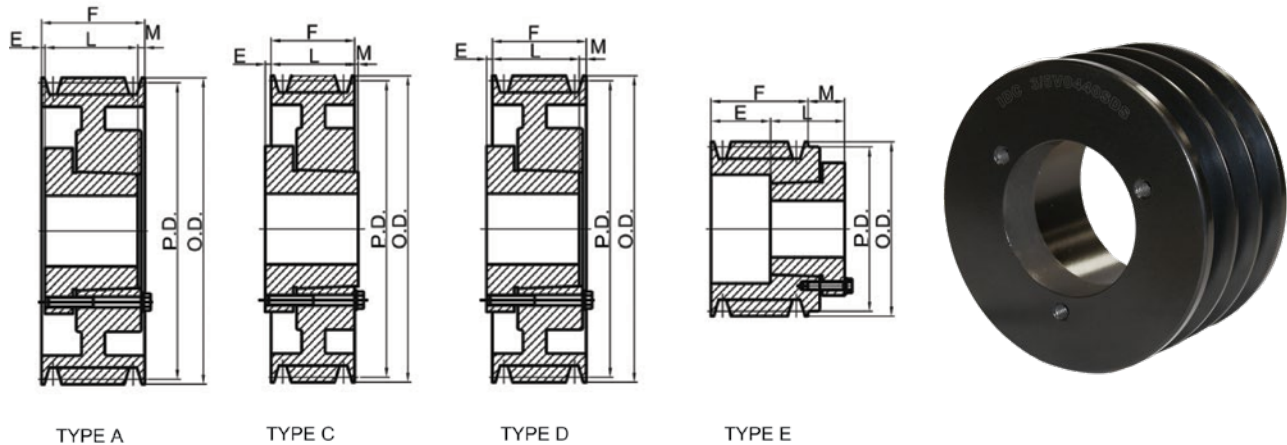

Diameters		2 Groove F = 1 11/16							3 Groove F = 2 3/8						
O.D.	P.D.	Part No.	Bush	Type*	E	L	M	Weight (lb)	Part No.	Bush	Type*	E	L	M	Weight (lb)
4.40	4.30	IDC 2-5V440SH**	SH	D-1	11/32	15/16	23/32	5.80	IDC 3-5V440SDS**	SDS	E-1	1 23/32	15/16	21/32	6.50
4.65	4.55	IDC 2-5V465SDS**	SDS	E-1	27/32	15/16	19/32	6.60	IDC 3-5V465SDS**	SDS	E-1	1 23/32	15/16	21/32	7.60
4.90	4.80	IDC 2-5V490SDS	SDS	A-1	1/32	15/16	11/32	6.80	IDC 3-5V490SDS	SDS	A-1	13/32	15/16	21/32	7.80
5.20	5.10	IDC 2-5V520SDS	SDS	A-1	1/32	15/16	11/32	7.00	IDC 3-5V520SDS	SDS	A-1	13/32	15/16	21/32	8.00
5.50	5.40	IDC 2-5V550SDS	SDS	A-1	1/32	15/16	11/32	7.20	IDC 3-5V550SDS	SDS	A-1	13/32	15/16	21/32	8.20
5.90	5.80	IDC 2-5V590SDS	SDS	A-1	1/32	15/16	11/32	7.60	IDC 3-5V590SDS	SDS	A-1	13/32	15/16	21/32	8.60
6.30	6.20	IDC 2-5V630SK	SK	D-1	11/32	1 15/16	3/32	9.40	IDC 3-5V630SK	SK	A-1	9/32	1 15/16	5/32	10.40
6.70	6.60	IDC 2-5V670SK	SK	D-1	11/32	1 15/16	3/32	10.50	IDC 3-5V670SK	SK	A-1	9/32	1 15/16	5/32	11.70
7.10	7.00	IDC 2-5V710SK	SK	D-1	11/32	1 15/16	3/32	11.50	IDC 3-5V710SF	SF	A-1	5/32	2 1/16	5/32	12.70
7.50	7.40	IDC 2-5V750SK	SK	D-1	11/32	1 15/16	3/32	12.50	IDC 3-5V750SF	SF	A-1	5/32	2 1/16	5/32	15.00
8.00	7.90	IDC 2-5V800SK	SK	D-2	11/32	1 15/16	3/32	13.00	IDC 3-5V800SF	SF	A-1	5/32	2 1/16	5/32	16.50
8.50	8.40	IDC 2-5V850SK	SK	D-2	11/32	1 15/16	3/32	14.00	IDC 3-5V850SF	SF	A-3	5/32	2 1/16	5/32	18.00
9.00	8.90	IDC 2-5V900SK	SK	D-3	11/32	1 15/16	3/32	15.20	IDC 3-5V900SF	SF	A-3	5/32	2 1/16	5/32	19.80
9.25	9.15	IDC 2-5V925SK	SK	D-3	11/32	1 15/16	3/32	15.30	IDC 3-5V925SF	SF	A-3	5/32	2 1/16	5/32	20.70
9.75	9.65	IDC 2-5V975SK	SK	D-3	11/32	1 15/16	3/32	15.50	IDC 3-5V975SF	SF	A-3	5/32	2 1/16	5/32	22.60
10.30	10.20	IDC 2-5V1030SK	SK	D-3	11/32	1 15/16	3/32	15.50	IDC 3-5V1030SF	SF	A-3	5/32	2 1/16	5/32	24.60
10.90	10.80	IDC 2-5V1090SK	SK	D-3	11/32	1 15/16	3/32	16.50	IDC 3-5V1090SF	SF	A-3	5/32 5/32	2 1/16	5/32	26.70
11.30	11.20	IDC 2-5V1130SK	SK	D-3	11/32	1 15/16	3/32	17.80	IDC 3-5V1130SF	SF	A-3	5/32	2 1/16	5/32	28.20
11.80	11.70	IDC 2-5V1180SK	SK	D-3	11/32	1 15/16	3/32	19.00	IDC 3-5V1180SF	SF	A-3	13/32	2 1/16	5/32	29.70
12.50	12.40	IDC 2-5V1250SK	SK	D-3	13/32	2 1/16	1/32	21.00	IDC 3-5V1250E	E	D-3		2 3/4	1/32	34.00
13.20	13.10	IDC 2-5V1320SF	SF	D-3	13/32	2 1/16	1/32	22.60	IDC 3-5V1320E	E	D-3	13/32	2 3/4	1/32	35.00
14.00	13.90	IDC 2-5V1400SF	SF	D-3	13/32	2 1/16	1/32	25.30	IDC 3-5V1400E	E	D-3	13/32	2 3/4	1/32	37.00
15.00	14.90	IDC 2-5V1500SF	SF	D-3	13/32	2 1/16	1/32	27.40	IDC 3-5V1500E	E	D-3	13/32	2 3/4	1/32	38.00
16.00	15.90	IDC 2-5V1600SF	SF	D-3	13/32	2 1/16	1/32	29.20	IDC 3-5V1600E	E	D-3	13/32	2 3/4	1/32	39.20
18.70	18.60	IDC 2-5V1870SF	SF	D-3	13/32	2 1/16	1/32	36.00	IDC 3-5V1870E	E	D-3	13/32	2 3/4	1/32	47.20
21.20	21.10	IDC 2-5V2120SF	SF	D-3	13/32	2 1/16	1/32	43.00	IDC 3-5V2120E	E	D-3	13/32	2 3/4	1/32	55.00
23.60	23.50	IDC 2-5V2360E	E	C-3	29/32	2 3/4	5/32	55.00	IDC 3-5V2360E	E	D-3	13/32	2 3/4	1/32	70.20
28.00	27.90	IDC 2-5V2800E	E	C-3	29/32	2 3/4	5/32	67.00	IDC 3-5V2800E	E	D-3	13/32	2 3/4	1/32	86.50
31.50	31.40								IDC 3-5V3150F	F	C-3	25/32	3 3/4	19/32	116.00
37.50	37.40								IDC 3-5V3750F	F	C-3	25/32	3 3/4	19/32	141.00
50.00	49.90								IDC 3-5V5000F	F	C-3	25/32	3 3/4	19/32	211.00

*Suffix on type indicates construction:

1 = Solid 2 = Web 3 = Arm/Spoke

**Reverse mount sheave

Order bushings separately from pages 5-6.

Sheaves are precision machined from gray cast iron, statically balanced, painted with baked enamel finish and individually packaged.

Note: cast iron sheaves may not exceed 6,500 FPM. This speed does not specify if dynamic balancing (2 plane) is required. Contact IDC Select at info@IDCselect.com to verify whether dynamic balancing is required.