
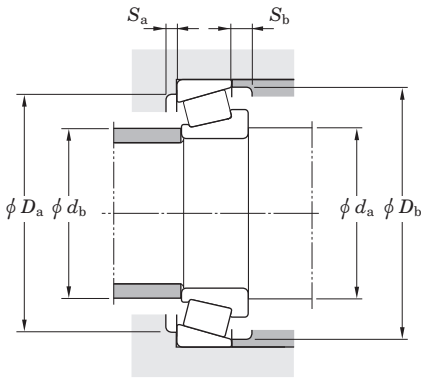


Series No.	Cone (Inner ring)	Page	Cup (Outer ring)	Page
11000R	11163R	59		
	11165XR	61		
	11165XSR	61		
11500	11590	103	11520	103
LM11700R	LM11749R	39	LM11710	39
LM11900	LM11949	39	LM11910	39
12000	12168	61	12303	61
	12175	61		
12500	12580	39	12520	39
M12600	M12648	41	M12610	41
	M12648A	41		
	M12649	41		
LM12700	LM12749	41	LM12711	41
13600	13682	53	13620	53,55
	13685	55	13621	55
	13686	55	13624	55
	13687	55		
13800	13889	55	13830	55,57
	13892	57	13836	55
14000	14116	47	14274	45,47
	14117A	45	14274A	45,47,49,51
	14118	45	14276	45,51
	14118A	45	14277	49
	14120A	45	14283	45
	14123A	47		
	14125	47		
	14130	49		
	14131	49		
	14136A	51		
	14137A	51		
	14138A	51		
	14139	51		
15000	15100	41,43	15243	41
	15101	41,43	15245	41,43,45,47
	15102	43	15250	43
	15103	43	15250R	43
	15106	43	15250X	43
	15112	43		
	15113	43		
	15116	45		
	15117	45		
	15118	47		
	15119	47		
	15120	47		
	15123	47		
	15125	47		
	15126	47		

Series No.	Cone (Inner ring)	Page	Cup (Outer ring)	Page
15500	15572	41	15520	41,43
	15578	41	15523	43
	15579X	43		
	15580	43		
	15590	43		
16000	16131	49	16282	53,55
	16137	51	16283	55
	16143	53	16284	49,51,53,55
	16150	55		
	16151	55		
17000	17098	41	17244	41,45
	17098X	41		
	17118	45		
	17118S	45		
	17119	45		
17500R	17580R	39	17520	39
17800	17887	65	17831	65
18000	18200	69	18337	69
18500	18587	57	18520	57,59
	18590	59		
	18591	59		
18600	18685	61	18620	61,65
	18690	65		
18700	18780	65	18720	65
	18790	69	18721	69
			18723	69
			18724	69
19000R	19138R	51	19268	51,53
	19143R	53	19268X	55
	19150R	55	19269	55
			19281	53,55
			19282	55
			19283	53,55
21000	21063	39	21212	39
	21075	39	21213	39
	21078	39		
L21500	L21549	39	L21511	39
23000	23092	103	23256	103
	23098	103		
	23100	103		
23600	23685	49	23620	49,51
	23690	51	23621	53
	23691	53	23623	53
24700R	24780R	59	24720	59
	24781R	59	24721	59
			24722	59

TS type
d 21.430 ~ (25.400) mm
0.8437 ~ (1.0000) inch


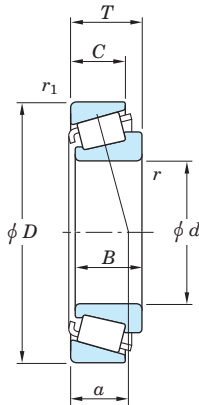


$P = XF_r + YF_a$ $P_0 = 0.5 F_r + Y_0 F_a$ or $P_0 = F_r$			
$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y_1

Note) The Values of “e” “Y₁” and “Y₀” are given in the table below.

Boundary dimensions														Basic load ratings (kN)		Fatigue load limit		Bearing No.		Load center		Mounting dimensions						Con- stant	Axial load factors		Reference rating (kN) (500 rpm for 3 000 Hrs.)		Factor		
<i>d</i>		<i>D</i>		<i>T</i>		<i>B</i>		<i>C</i>		<i>r</i> ¹⁾ (min.)		<i>r</i> ₁ ¹⁾ (min.)		<i>C</i> _r	<i>C</i> _{0r}	(kN) <i>C</i> _u		Cone (Inner ring)	Cup (Outer ring)	<i>a</i>		<i>d</i> _a		<i>d</i> _b		<i>D</i> _a		<i>D</i> _b		<i>e</i>	<i>Y</i> ₁	<i>Y</i> ₀	(500 rpm for 3 000 Hrs.) Radial	Axial	<i>K</i>
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch							mm	inch	mm	inch	mm	inch	mm	inch	mm	inch						
21.430	0.8437	50.005	1.9687	17.526	0.6900	18.288	0.7200	13.970	0.5500	1.2	0.05	1.2	0.05	48.8	40.7	5.80		M12649	M12610	11.1	0.44	27.5	1.08	25.5	1.00	44.0	1.73	46.0	1.81	0.28	2.16	1.19	11.2	5.35	2.10
21.987	0.8656	45.974	1.8100	15.494	0.6100	16.637	0.6550	12.065	0.4750	1.2	0.05	1.2	0.05	37.5	34.6	4.85		LM12749	LM12711	10.0	0.39	27.5	1.08	26.0	1.02	40.0	1.57	42.5	1.67	0.31	1.96	1.08	8.65	4.50	1.91
22.225	0.8750	50.005	1.9687	17.526	0.6900	18.288	0.7200	13.970	0.5500	1.2	0.05	1.2	0.05	48.8	40.7	5.80		M12648	M12610	11.1	0.44	28.5	1.12	26.5	1.04	44.0	1.73	46.0	1.81	0.28	2.16	1.19	11.2	5.35	2.10
	0.8750	50.005	1.9687	17.526	0.6900	18.288	0.7200	13.970	0.5500	1.2	0.05	1.2	0.05	48.8	40.7	5.80		M12648A	M12610	11.1	0.44	28.5	1.12	26.5	1.04	44.0	1.73	46.0	1.81	0.28	2.16	1.19	11.2	5.35	2.10
	0.8750	50.800	2.0000	15.011	0.5910	14.260	0.5614	12.700	0.5000	1.2	0.05	1.6	0.06	33.3	28.8	4.05		07087	07210X	12.3	0.48	28.5	1.12	27.0	1.06	44.5	1.75	47.5	1.87	0.40	1.49	0.82	7.65	5.25	1.46
	0.8750	52.388	2.0625	19.368	0.7625	20.168	0.7940	14.288	0.5625	1.6	0.06	1.6	0.06	45.9	37.9	5.45		1380	1328	11.6	0.46	29.5	1.16	29.5	1.16	45.0	1.77	48.5	1.91	0.29	2.05	1.13	10.7	5.35	2.00
	0.8750	53.975	2.1250	19.368	0.7625	20.168	0.7940	14.288	0.5625	1.6	0.06	1.6	0.06	45.9	37.9	5.45		1380	1329	11.6	0.46	29.5	1.16	29.5	1.16	46.0	1.81	49.0	1.93	0.29	2.05	1.13	10.7	5.35	2.00
	0.8750	56.896	2.2400	19.368	0.7625	19.837	0.7810	15.875	0.6250	1.2	0.05	1.2	0.05	50.0	43.1	6.20		1755	1729	12.5	0.49	29.0	1.14	27.5	1.08	49.0	1.93	51.0	2.01	0.31	1.95	1.07	11.6	6.10	1.90
	0.8750	57.150	2.2500	17.462	0.6875	17.462	0.6875	13.495	0.5313	1.6	0.06	1.6	0.06	47.2	42.7	6.10		15572	15520	12.7	0.50	32.5	1.28	30.5	1.20	51.0	2.01	53.0	2.09	0.35	1.73	0.95	10.8	6.40	1.69
	0.8750	57.150	2.2500	19.845	0.7813	19.355	0.7620	15.875	0.6250	0.8	0.03	1.6	0.06	60.8	57.1	8.25		1975R	1922	13.9	0.55	29.0	1.14	28.0	1.10	51.0	2.01	53.5	2.11	0.33	1.82	1.00	14.0	7.90	1.77
	0.8750	57.150	2.2500	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	1.6	0.06	65.8	55.7	8.05		1280	1220	15.3	0.60	29.5	1.16	29.0	1.14	49.0	1.93	52.0	2.05	0.35	1.73	0.95	15.2	9.00	1.69
	0.8750	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	1.6	0.06	1.2	0.05	83.8	75.2	11.2		2684	2631	13.9	0.55	31.5	1.24	29.0	1.14	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
0.8750	80.000	3.1496	20.996	0.8266	22.403	0.8820	17.826	0.7018	0.8	0.03	1.2	0.05	85.0	74.8	11.4		341	332	15.1	0.59	33.5	1.32	32.0	1.26	73.0	2.87	75.0	2.95	0.27	2.20	1.21	19.6	9.15	2.14	
22.606	0.8900	47.000	1.8504	15.500	0.6102	15.500	0.6102	12.000	0.4724	1.6	0.06	1.0	0.04	35.0	32.8	4.45		LM72849	LM72810	12.3	0.48	30.0	1.18	28.0	1.10	40.5	1.59	44.0	1.73	0.47	1.27	0.70	8.05	6.50	1.24
23.812	0.9375	50.292	1.9800	14.224	0.5600	14.732	0.5800	10.668	0.4200	1.6	0.06	1.2	0.05	39.1	37.0	5.15		L44640R	L44610	10.8	0.43	30.5	1.20	28.5	1.12	44.5	1.75	47.0	1.85	0.37	1.60	0.88	8.95	5.70	1.56
	0.9375	52.000	2.0472	15.011	0.5910	14.260	0.5614	12.700	0.5000	1.6	0.06	2.0	0.08	33.3	28.8	4.05		07093	07205	12.3	0.48	30.5	1.20	28.5	1.12	44.5	1.75	48.0	1.89	0.40	1.49	0.82	7.65	5.25	1.46
	0.9375	56.896	2.2400	19.368	0.7625	19.837	0.7810	15.875	0.6250	0.8	0.03	1.2	0.05	50.0	43.1	6.20		1779	1729	12.5	0.49	29.5	1.16	28.5	1.12	49.0	1.93	51.0	2.01	0.31	1.95	1.07	11.6	6.10	1.90
	0.9375	56.896	2.2400	19.368	0.7625	19.837	0.7810	15.875	0.6250	0.8	0.03	1.6	0.06	50.0	43.1	6.20		1779	1729X	12.5	0.49	29.5	1.16	28.5	1.12	49.0	1.93	52.0	2.05	0.31	1.95	1.07	11.6	6.10	1.90
	0.9375	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	0.8	0.03	1.2	0.05	83.8	75.2	11.2		2685	2631	13.9	0.55	30.5	1.20	30.0	1.18	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
	0.9375	71.996	2.8345	19.000	0.7480	18.923	0.7450	15.875	0.6250	2.4	0.09	1.6	0.06	69.8	60.0	8.85		26093	26283	14.3	0.56	35.0	1.38	32.0	1.26	62.0	2.44	65.0	2.56	0.36	1.67	0.92	16.1	9.90	1.62
24.981	0.9835	50.005	1.9687	13.495	0.5313	14.260	0.5614	9.525	0.3750	1.6	0.06	1.0	0.04	33.3	28.8	4.05		07098	07196	10.8	0.43	31.0	1.22	29.0	1.14	44.5	1.75	47.0	1.85	0.40	1.49	0.82	7.65	5.25	1.46
	0.9835	62.000	2.4409	16.002	0.6300	16.566	0.6522	14.288	0.5625	1.6	0.06	1.6	0.06	47.4	40.6	5.80		17098	17244	12.7	0.50	33.0	1.30	30.5	1.20	54.0	2.13	57.0	2.24	0.38	1.57	0.86	10.9	7.15	1.53
25.000	0.9842	50.005	1.9687	13.495	0.5313	14.260	0.5614	9.525	0.3750	1.6	0.06	1.0	0.04	33.3	28.8	4.05		07097	07196	10.8	0.43	31.0	1.22	29.0	1.14	44.5	1.75	47.0	1.85	0.40	1.49	0.82	7.65	5.25	1.46
	0.9842	62.000	2.4409	16.002	0.6300	16.566	0.6522	14.288	0.5625	1.6	0.06	1.6	0.06	47.4	40.6	5.80		17098X	17244	12.7	0.50	33.0	1.30	30.5	1.20	54.0	2.13	57.0	2.24	0.38	1.57	0.86	10.9	7.15	1.53
	0.9842	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	2.0	0.08	1.2	0.05	83.8	75.2	11.2		2694X	2631	13.9	0.55	33.0	1.30	31.0	1.22	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
	0.9842	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	3.6	0.14	3.2	0.13	98.6	89.3	13.3		3188X	3120	20.3	0.80	40.0	1.57	35.0	1.38	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
25.400	1.0000	50.005	1.9687	13.495	0.5313	14.260	0.5614	9.525	0.3750	1.0	0.04	1.0	0.04	33.3	28.8	4.05		07100	07196	10.8	0.43	30.5	1.20	29.5</											

TS type
d (25.400) ~ (28.575) mm
(1.0000) ~ (1.1250) inch

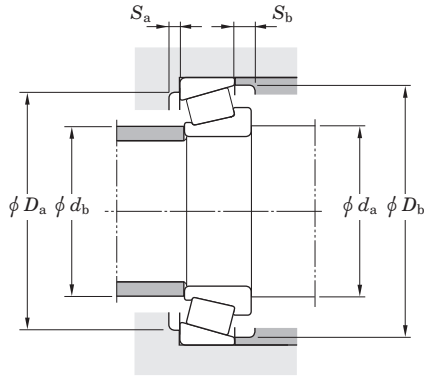
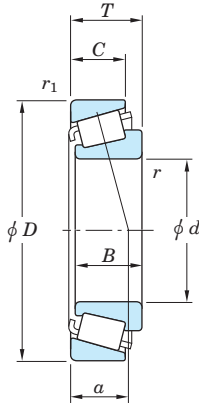


$P = XF_r + YF_a$ $P_0 = 0.5 F_r + Y_0 F_a$ or $P_0 = F_r$			
$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y_1

Note) The Values of “e” “Y₁” and “Y₀” are given in the table below.

Boundary dimensions												Basic load ratings (kN)		Fatigue load limit		Bearing No.		Load center		Mounting dimensions						Constant	Axial load factors		Reference rating (kN)		Factor				
<i>d</i>		<i>D</i>		<i>T</i>		<i>B</i>		<i>C</i>		<i>r</i> ¹⁾ (min.)		<i>r</i> ₁ ¹⁾ (min.)		<i>C</i> _r	<i>C</i> _{0r}	(kN) <i>C</i> _u		Cone (Inner ring)	Cup (Outer ring)	<i>a</i>		<i>d</i> _a		<i>d</i> _b		<i>D</i> _a		<i>D</i> _b		<i>e</i>	<i>Y</i> ₁	<i>Y</i> ₀	(500 rpm for 3 000 Hrs.)		<i>K</i>
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch							mm	inch	mm	inch	mm	inch	mm	inch	mm	inch				mm	inch	
25.400	1.0000	63.500	2.5000	19.050	0.7500	20.638	0.8125	14.288	0.5625	0.8	0.03	1.2	0.05	55.7	50.7	7.30		15101	15250R	13.2	0.52	32.5	1.28	31.5	1.24	55.0	2.17	59.0	2.32	0.35	1.71	0.94	12.9	7.75	1.67
	1.0000	63.500	2.5000	20.638	0.8125	20.638	0.8125	15.875	0.6250	3.6	0.14	1.2	0.05	55.7	50.7	7.30		15100	15250	15.0	0.59	38.0	1.50	31.5	1.24	55.0	2.17	59.0	2.32	0.35	1.71	0.94	12.9	7.75	1.67
	1.0000	63.500	2.5000	20.638	0.8125	20.638	0.8125	15.875	0.6250	3.6	0.14	1.6	0.06	55.7	50.7	7.30		15100	15250X	15.0	0.59	38.0	1.50	31.5	1.24	55.0	2.17	59.0	2.32	0.35	1.71	0.94	12.9	7.75	1.67
	1.0000	63.500	2.5000	20.638	0.8125	20.638	0.8125	15.875	0.6250	1.6	0.06	1.6	0.06	55.7	50.7	7.30		15102	15250X	15.0	0.59	34.0	1.34	31.5	1.24	55.0	2.17	59.0	2.32	0.35	1.71	0.94	12.9	7.75	1.67
	1.0000	64.292	2.5312	21.432	0.8438	21.432	0.8438	16.670	0.6563	1.6	0.06	1.6	0.06	69.1	70.7	9.90		M86643R	M86610	18.0	0.71	38.0	1.50	36.5	1.44	54.0	2.13	61.0	2.40	0.55	1.10	0.60	16.0	14.9	1.07
	1.0000	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	1.2	0.05	1.2	0.05	83.8	75.2	11.2		2687	2631	13.9	0.55	33.5	1.32	31.5	1.24	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
	1.0000	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	1.6	0.06	63.7	61.1	8.80		02473	02420	17.1	0.67	34.5	1.36	33.5	1.32	59.0	2.32	63.0	2.48	0.42	1.44	0.79	14.8	10.5	1.41
	1.0000	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	0.8	0.03	63.7	61.1	8.80		02473	02421	17.1	0.67	34.5	1.36	33.5	1.32	59.0	2.32	63.0	2.48	0.42	1.44	0.79	14.8	10.5	1.41
	1.0000	72.000	2.8346	19.000	0.7480	18.923	0.7450	15.875	0.6250	1.6	0.06	1.6	0.06	69.8	60.0	8.85		26100	26283	14.3	0.56	34.5	1.36	32.5	1.28	62.0	2.44	65.0	2.56	0.36	1.67	0.92	16.1	9.90	1.62
	1.0000	72.233	2.8438	25.400	1.0000	25.400	1.0000	19.842	0.7812	0.8	0.03	2.4	0.09	83.8	87.4	12.4		HM88630	HM88610	20.7	0.81	39.5	1.56	39.5	1.56	60.0	2.36	69.0	2.72	0.55	1.10	0.60	19.6	18.3	1.07
	1.0000	72.626	2.8593	24.608	0.9688	24.257	0.9550	17.462	0.6875	2.4	0.09	1.6	0.06	77.3	60.5	8.75		41100	41286	20.7	0.81	41.0	1.61	36.5	1.44	61.0	2.40	68.0	2.68	0.60	1.00	0.55	17.9	18.4	0.97
	1.0000	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	0.8	0.03	0.8	0.03	98.6	89.3	13.3		3189	3130	20.3	0.80	35.5	1.40	35.0	1.38	63.0	2.48	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.0000	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	2.0	0.08	3.2	0.13	98.6	89.3	13.3		3189X	3120	20.3	0.80	37.5	1.48	35.0	1.38	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.0000	80.000	3.1496	21.000	0.8268	22.403	0.8820	17.826	0.7018	0.8	0.03	1.2	0.05	85.0	74.8	11.4		338	332	15.1	0.59	36.5	1.44	35.0	1.38	73.0	2.87	75.0	2.95	0.27	2.20	1.21	19.6	9.15	2.14
	1.0000	80.000	3.1496	24.176	0.9518	22.403	0.8820	21.000	0.8268	0.8	0.03	2.4	0.09	85.0	74.8	11.4		338	332A	18.3	0.72	36.5	1.44	35.0	1.38	71.0	2.80	75.0	2.95	0.27	2.20	1.21	19.6	9.15	2.14
25.987	1.0231	50.292	1.9800	14.224	0.5600	14.732	0.5800	10.668	0.4200	3.6	0.14	1.2	0.05	39.1	37.0	5.15		L44645R	L44610	10.8	0.43	36.5	1.44	31.0	1.22	44.5	1.75	47.0	1.85	0.37	1.60	0.88	8.95	5.70	1.56
	1.0231	57.150	2.2500	17.462	0.6875	17.462	0.6875	13.495	0.5313	3.6	0.14	1.6	0.06	47.2	42.7	6.10		15579X	15520	12.7	0.50	38.5	1.52	32.0	1.26	51.0	2.01	53.0	2.09	0.35	1.73	0.95	10.8	6.40	1.69
26.157	1.0298	63.500	2.5000	20.638	0.8125	20.638	0.8125	15.875	0.6250	0.8	0.03	1.2	0.05	55.7	50.7	7.30		15103	15250	15.0	0.59	33.5	1.32	33.0	1.30	55.0	2.17	59.0	2.32	0.35	1.71	0.94	12.9	7.75	1.67
26.162	1.0300	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	1.6	0.06	1.2	0.05	83.8	75.2	11.2		2682	2631	13.9	0.55	34.5	1.36	32.0	1.26	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
26.975	1.0620	57.150	2.2500	19.845	0.7813	19.355	0.7620	15.875	0.6250	0.8	0.03	1.6	0.06	60.8	57.1	8.25		1987R	1922	13.9	0.55	32.5	1.28	31.5	1.24	51.0	2.01	53.5	2.11	0.33	1.82	1.00	14.0	7.90	1.77
26.987	1.0625	72.626	2.8593	24.608	0.9688	24.257	0.9550	17.462	0.6875	2.4	0.09	1.6	0.06	77.3	60.5	8.75		41106	41286	20.7	0.81	42.0	1.65	36.5	1.44	61.0	2.40	68.0	2.68	0.60	1.00	0.55	17.9	18.4	0.97
26.988	1.0625	50.292	1.9800	14.224	0.5600	14.732	0.5800	10.668	0.4200	3.6	0.14	1.2	0.05	39.1	37.0	5.15		L44649R	L44610	10.8	0.43	37.5	1.48	31.0	1.22	44.5	1.75	47.0	1.85	0.37	1.60	0.88	8.95	5.70	1.56
	1.0625	57.150	2.2500	19.845	0.7813	19.355	0.7620	15.875	0.6250	3.2	0.13	1.6	0.06	60.8	57.1	8.25		1997XR	1922	13.9	0.55	37.5	1.48	31.5	1.24	51.0	2.01	53.5	2.11	0.33	1.82	1.00	14.0	7.90	1.77
	1.0625	60.325	2.3750	19.842	0.7812	17.462	0.6875	15.875	0.6250	3.6	0.14	1.6	0.06	47.2	42.7	6.10		15580	15523	15.1	0.59	38.5	1.52	32.0	1.26	51.0	2.01	54.0	2.13	0.35	1.73	0.95	10.8	6.40	1.69
	1.0625	62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	0.8	0.03	1.2	0.05	55.7	50.7	7.30		15106	15245	13.2	0.52	33.5	1.32	33.0	1.30	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
	1.0625	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	1.6	0.06	1.2	0.05	83.8	75.2	11.2		2688	2631	13.9	0.55	35.0	1.38	33.0	1.30	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
28.575	1.1250	57.150	2.2500	17.462	0.6875	17.462	0.6875	13.495	0.5313	3.6	0.14	1.6	0.06	47.2	42.7	6.10		15590	15520	12.7	0.50	39.0	1.54	33.5	1.32	51.0	2.01	53.0	2.09						

TS type
d (28.575) ~ (30.162) mm
(1.1250) ~ (1.1875) inch

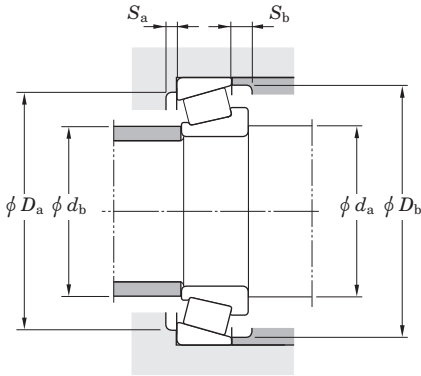
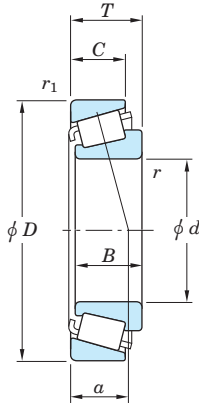


$P = XF_r + YF_a$ $P_0 = 0.5 F_r + Y_0 F_a$ or $P_0 = F_r$			
$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y_1

Note) The Values of “e” “Y₁” and “Y₀” are given in the table below.

Boundary dimensions												Basic load ratings (kN)		Fatigue load limit		Bearing No.		Load center		Mounting dimensions						Con- stant	Axial load factors		Reference rating (kN)		Factor				
<i>d</i>		<i>D</i>		<i>T</i>		<i>B</i>		<i>C</i>		<i>r</i> ¹⁾ (min.)		<i>r</i> ₁ ¹⁾ (min.)		<i>C</i> _r	<i>C</i> _{0r}	(kN) <i>C</i> _u		Cone (Inner ring)	Cup (Outer ring)	<i>a</i>	<i>d</i> _a		<i>d</i> _b		<i>D</i> _a		<i>D</i> _b		<i>e</i>	<i>Y</i> ₁	<i>Y</i> ₀	(500 rpm for 3 000 Hrs.) Radial Axial		<i>K</i>	
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch							mm	inch	mm	inch	mm	inch	mm	inch								
28.575	1.1250	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	2.4	0.09	2.4	0.09	70.2	71.1	10.0		M88040	M88011	19.2	0.76	42.0	1.65	39.0	1.54	58.0	2.28	65.0	2.56	0.55	1.10	0.60	16.3	15.2	1.07
	1.1250	72.000	2.8346	19.000	0.7480	18.923	0.7450	15.875	0.6250	1.6	0.06	1.6	0.06	59.4	60.0	7.25		26112	26283	14.3	0.56	37.0	1.46	35.0	1.38	62.0	2.44	65.0	2.56	0.36	1.67	0.92	16.1	9.90	1.62
	1.1250	72.626	2.8593	24.608	0.9688	24.257	0.9550	17.462	0.6875	4.8	0.19	1.6	0.06	77.3	60.5	8.75		41125	41286	20.7	0.81	48.0	1.89	36.5	1.44	61.0	2.40	68.0	2.68	0.60	1.00	0.55	17.9	18.4	0.97
	1.1250	72.626	2.8593	24.608	0.9688	24.257	0.9550	17.462	0.6875	1.6	0.06	1.6	0.06	77.3	60.5	8.75		41126	41286	20.7	0.81	41.5	1.63	36.5	1.44	61.0	2.40	68.0	2.68	0.60	1.00	0.55	17.9	18.4	0.97
	1.1250	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	3.6	0.14	3.2	0.13	98.6	89.3	13.3		3192	3120	20.3	0.80	42.5	1.67	37.0	1.46	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.1250	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	1.2	0.05	3.2	0.13	98.6	89.3	13.3		3198	3120	20.3	0.80	39.0	1.54	37.0	1.46	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.1250	73.025	2.8750	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	3.2	0.13	68.8	65.7	9.55		02872	02820	18.4	0.72	37.5	1.48	37.0	1.46	62.0	2.44	68.0	2.68	0.45	1.32	0.73	16.0	12.4	1.29
	1.1250	73.025	2.8750	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	0.8	0.03	68.8	65.7	9.55		02872	02830	18.4	0.72	37.5	1.48	37.0	1.46	64.0	2.52	69.0	2.72	0.45	1.32	0.73	16.0	12.4	1.29
	1.1250	80.962	3.1875	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	0.8	0.03	68.8	65.7	9.55		02872	02831	18.4	0.72	37.5	1.48	37.0	1.46	67.0	2.64	69.0	2.72	0.45	1.32	0.73	16.0	12.4	1.29
29.000	1.1417	50.292	1.9800	14.224	0.5600	14.732	0.5800	10.668	0.4200	3.6	0.14	1.2	0.05	36.3	37.2	5.15		L45449	L45410	10.9	0.43	39.5	1.56	33.0	1.30	44.5	1.75	48.0	1.89	0.37	1.62	0.89	8.35	5.25	1.58
	1.1417	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	1.0	0.04	1.2	0.05	83.8	75.2	11.2		2695X	2631	13.9	0.55	35.0	1.38	34.0	1.34	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
29.367	1.1562	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	3.6	0.14	1.2	0.05	83.8	75.2	11.2		2690	2631	13.9	0.55	41.0	1.61	35.0	1.38	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
	1.1562	66.421	2.6150	23.812	0.9375	25.433	1.0013	19.050	0.7500	0.8	0.03	1.2	0.05	83.8	75.2	11.2		2691	2631	13.9	0.55	35.5	1.40	35.0	1.38	58.0	2.28	60.0	2.36	0.25	2.36	1.30	19.5	8.45	2.30
29.985	1.1805	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	0.8	0.03	3.2	0.13	98.6	89.3	13.3		3190S	3120	20.3	0.80	39.0	1.54	38.0	1.50	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
29.987	1.1806	62.000	2.4409	16.002	0.6300	16.566	0.6522	14.288	0.5625	1.6	0.06	1.6	0.06	47.4	40.6	5.80		17118	17244	12.7	0.50	37.0	1.46	34.5	1.36	54.0	2.13	57.0	2.24	0.38	1.57	0.86	10.9	7.15	1.53
	1.1806	62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	1.2	0.05	1.2	0.05	55.7	50.7	7.30		15117	15245	13.2	0.52	36.5	1.44	35.0	1.38	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
	1.1806	71.996	2.8345	19.000	0.7480	18.923	0.7450	15.875	0.6250	1.6	0.06	2.0	0.08	69.8	60.0	8.85		26118	26283S	14.3	0.56	38.0	1.50	36.0	1.42	62.0	2.44	65.0	2.56	0.36	1.67	0.92	16.1	9.90	1.62
	1.1806	72.000	2.8346	19.000	0.7480	18.923	0.7450	15.875	0.6250	1.6	0.06	1.6	0.06	69.8	60.0	8.85		26118	26283	14.3	0.56	38.0	1.50	36.0	1.42	62.0	2.44	65.0	2.56	0.36	1.67	0.92	16.1	9.90	1.62
30.000	1.1811	62.000	2.4409	16.002	0.6300	16.566	0.6522	14.288	0.5625	1.6	0.06	1.6	0.06	47.4	40.6	5.80		17118S	17244	12.7	0.50	37.0	1.46	34.5	1.36	54.0	2.13	57.0	2.24	0.38	1.57	0.86	10.9	7.15	1.53
	1.1811	68.956	2.7148	19.845	0.7813	19.202	0.7560	15.875	0.6250	0.8	0.03	3.2	0.13	57.7	55.0	7.95		14118	14274A	15.5	0.61	37.0	1.46	36.5	1.44	59.0	2.32	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
	1.1811	69.012	2.7170	19.845	0.7813	19.583	0.7710	15.875	0.6250	3.6	0.14	1.2	0.05	57.7	55.0	7.95		14117A	14276	15.5	0.61	42.5	1.67	39.5	1.56	60.0	2.36	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
	1.1811	69.012	2.7170	19.845	0.7813	19.583	0.7710	15.875	0.6250	3.6	0.14	3.2	0.13	57.7	55.0	7.95		14118A	14274	15.5	0.61	42.5	1.67	39.5	1.56	59.0	2.32	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
	1.1811	69.850	2.7500	23.812	0.9375	25.357	0.9983	19.050	0.7500	3.6	0.14	1.2	0.05	89.2	85.1	12.7		2586	2523	14.4	0.57	42.0	1.65	35.5	1.40	61.0	2.40	64.0	2.52	0.27	2.19	1.21	20.7	9.65	2.14
	1.1811	71.996	2.8345	19.000	0.7480	18.923	0.7450	15.875	0.6250	1.6	0.06	1.6	0.06	69.8	60.0	8.85		26118S	26283	14.3	0.56	38.0	1.50	36.0	1.42	62.0	2.44	65.0	2.56	0.36	1.67	0.92	16.1	9.90	1.62
	1.1811	72.085	2.8380	29.522	1.1623	26.721	1.0520	18.415	0.7250	3.6	0.14	2.4	0.09	57.7	55.0	7.95		14120A	14283	22.6	0.89	42.5	1.67	39.5	1.56	60.0	2.36	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
	1.1811	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	3.6	0.14	3.2	0.13	98.6	89.3	13.3		3190	3120	20.3	0.80	43.0	1.69	38.0	1.50	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.1811	80.000	3.1496	21.000	0.8268	22.403	0.8820	17.826	0.7018	0.8	0.03	1.2	0.05	85.0	74.8	11.4		348	332	15.1	0.59	39.5	1.56	39.5	1.56	73.0	2.87	75.0	2.95	0.27	2.20	1.21	19.6	9.15	2.14
	1.1811																																		

TS type
d (30.162) ~ (31.750) mm
(1.1875) ~ (1.2500) inch

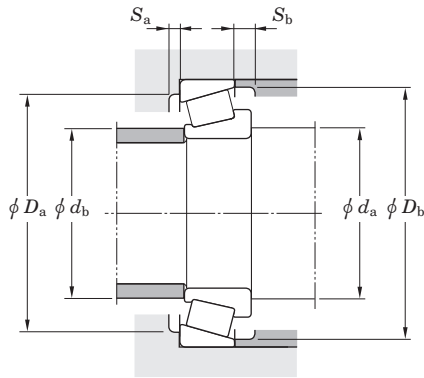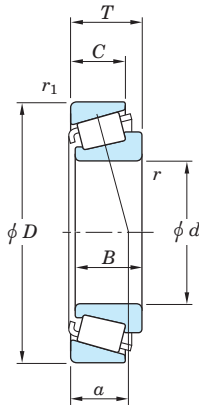

$P = XF_r + YF_a$ $P_0 = 0.5 F_r + Y_0 F_a$ or $P_0 = F_r$			
$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y ₁

Note) The Values of “e” “Y₁” and “Y₀” are given in the table below.

Boundary dimensions												Basic load ratings (kN)		Fatigue load limit		Bearing No.		Load center		Mounting dimensions						Con- stant	Axial load factors		Reference rating (kN)		Factor				
<i>d</i>		<i>D</i>		<i>T</i>		<i>B</i>		<i>C</i>		<i>r</i> ¹⁾ (min.)		<i>r</i> ₁ ¹⁾ (min.)		<i>C</i> _r	<i>C</i> _{0r}	(kN) <i>C</i> _u		Cone	Cup	<i>a</i>		<i>d</i> _a		<i>d</i> _b		<i>D</i> _a		<i>D</i> _b		<i>e</i>	<i>Y</i> ₁	<i>Y</i> ₀	(500 rpm for 3 000 Hrs.)		<i>K</i>
mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch					(Inner ring)	(Outer ring)	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	mm	inch	
30.162	1.1875	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	0.8	0.03	0.8	0.03	98.6	89.3	13.3		3187	3130	20.3	0.80	39.0	1.54	38.5	1.52	63.0	2.48	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.1875	72.626	2.8593	30.162	1.1875	29.997	1.1810	23.812	0.9375	3.6	0.14	3.2	0.13	98.6	89.3	13.3		3191	3120	20.3	0.80	44.0	1.73	38.5	1.52	61.0	2.40	67.0	2.64	0.33	1.80	0.99	23.0	13.1	1.76
	1.1875	76.200	3.0000	30.162	1.1875	29.997	1.1810	23.812	0.9375	3.6	0.14	0.8	0.03	98.6	89.3	13.3		3191	3129	20.3	0.80	44.0	1.73	38.5	1.52	65.0	2.56	69.0	2.72	0.33	1.80	0.99	23.0	13.1	1.76
	1.1875	79.375	3.1250	29.370	1.1563	29.771	1.1721	23.812	0.9375	0.8	0.03	3.2	0.13	109	105	15.7		3474	3420	20.8	0.82	41.0	1.61	40.0	1.57	67.0	2.64	74.0	2.91	0.37	1.64	0.90	25.5	15.9	1.60
	1.1875	80.000	3.1496	21.000	0.8268	22.403	0.8820	17.826	0.7018	0.8	0.03	1.2	0.05	85.0	74.8	11.4		334	332	15.1	0.59	39.5	1.56	39.5	1.56	73.0	2.87	75.0	2.95	0.27	2.20	1.21	19.6	9.15	2.14
	1.1875	80.000	3.1496	24.176	0.9518	22.403	0.8820	21.000	0.8268	0.8	0.03	2.4	0.09	85.0	74.8	11.4		334	332A	18.3	0.72	39.5	1.56	39.5	1.56	71.0	2.80	75.0	2.95	0.27	2.20	1.21	19.6	9.15	2.14
	1.1875	80.035	3.1510	21.432	0.8438	20.940	0.8244	15.875	0.6250	1.6	0.06	1.6	0.06	71.6	65.9	9.70		28118	28317	16.9	0.67	40.0	1.57	37.5	1.48	69.0	2.72	73.0	2.87	0.40	1.49	0.82	16.5	11.3	1.46
	30.213	1.1895	62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	3.6	0.14	1.2	0.05	55.7	50.7	7.30		15118	15245	13.2	0.52	41.5	1.63	35.5	1.40	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75
1.1895		62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	1.6	0.06	1.2	0.05	55.7	50.7	7.30		15119	15245	13.2	0.52	37.5	1.48	35.5	1.40	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
1.1895		62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	0.8	0.03	1.2	0.05	55.7	50.7	7.30		15120	15245	13.2	0.52	36.0	1.42	35.5	1.40	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
30.226	1.1900	69.012	2.7170	19.845	0.7813	19.583	0.7710	15.875	0.6250	0.8	0.03	3.2	0.13	57.7	55.0	7.95		14116	14274	15.5	0.61	37.0	1.46	36.5	1.44	59.0	2.32	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
30.955	1.2187	64.292	2.5312	21.432	0.8438	21.432	0.8438	16.670	0.6563	2.4	0.09	1.6	0.06	69.1	70.7	9.90		M86648R	M86610	18.0	0.71	41.0	1.61	38.0	1.50	54.0	2.13	61.0	2.40	0.55	1.10	0.60	16.0	14.9	1.07
31.623	1.2450	66.675	2.6250	20.638	0.8125	20.638	0.8125	15.875	0.6250	1.6	0.06	1.6	0.06	58.1	54.5	7.90		1674	1620	15.7	0.62	45.0	1.77	38.5	1.52	58.0	2.28	61.0	2.40	0.37	1.62	0.89	13.5	8.55	1.57
31.750	1.2500	58.738	2.3125	14.684	0.5781	15.080	0.5937	10.716	0.4219	1.0	0.04	1.0	0.04	37.0	33.3	4.60		08125	08231	13.5	0.53	37.5	1.48	36.0	1.42	52.0	2.05	55.0	2.17	0.48	1.26	0.69	8.45	6.85	1.23
	1.2500	59.131	2.3280	15.875	0.6250	16.764	0.6600	11.811	0.4650	SP	SP	1.2	0.05	44.8	43.1	6.05		LM67048	LM67010	13.0	0.51	42.5	1.67	36.0	1.42	52.0	2.05	56.0	2.20	0.41	1.46	0.80	10.3	7.25	1.42
	1.2500	62.000	2.4409	18.161	0.7150	19.050	0.7500	14.288	0.5625	SP	SP	1.2	0.05	55.7	50.7	7.30		15123	15245	13.2	0.52	42.5	1.67	36.5	1.44	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
	1.2500	62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	3.6	0.14	1.2	0.05	55.7	50.7	7.30		15125	15245	13.2	0.52	42.5	1.67	36.5	1.44	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
	1.2500	62.000	2.4409	19.050	0.7500	20.638	0.8125	14.288	0.5625	0.8	0.03	1.2	0.05	55.7	50.7	7.30		15126	15245	13.2	0.52	37.0	1.46	36.5	1.44	55.0	2.17	58.0	2.28	0.35	1.71	0.94	12.9	7.75	1.67
	1.2500	66.421	2.6150	25.400	1.0000	25.357	0.9983	20.638	0.8125	0.8	0.03	3.2	0.13	89.2	85.1	12.7		2580	2520	16.0	0.63	38.5	1.52	37.5	1.48	57.0	2.24	62.5	2.46	0.27	2.19	1.21	20.7	9.65	2.14
	1.2500	66.421	2.6150	25.400	1.0000	25.357	0.9983	20.638	0.8125	3.6	0.14	3.2	0.13	89.2	85.1	12.7		2582	2520	16.0	0.63	44.0	1.73	37.5	1.48	57.0	2.24	62.5	2.46	0.27	2.19	1.21	20.7	9.65	2.14
	1.2500	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	3.6	0.14	1.6	0.06	63.7	61.1	8.80		02475	02420	17.1	0.67	44.5	1.75	38.5	1.52	59.0	2.32	63.0	2.48	0.42	1.44	0.79	14.8	10.5	1.41
	1.2500	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	1.6	0.06	1.6	0.06	63.7	61.1	8.80		02475A	02420	17.1	0.67	42.0	1.65	38.0	1.50	59.0	2.32	63.0	2.48	0.42	1.44	0.79	14.8	10.5	1.41
	1.2500	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	0.8	0.03	1.6	0.06	63.7	61.1	8.80		02476	02420	17.1	0.67	39.0	1.54	38.5	1.52	59.0	2.32	63.0	2.48	0.42	1.44	0.79	14.8	10.5	1.41
	1.2500	68.262	2.6875	22.225	0.8750	22.225	0.8750	17.462	0.6875	1.6	0.06	1.6	0.06	70.2	71.1	10.0		M88046	M88010	19.2	0.76	43.0	1.69	40.5	1.59	58.0	2.28	65.0	2.56	0.55	1.10	0.60	16.3	15.2	1.07
	1.2500	68.956	2.7148	19.845	0.7813	19.583	0.7710	15.875	0.6250	3.6	0.14	3.2	0.13	57.7	55.0	7.95		14125	14274A	15.5	0.61	44.0	1.73	37.5	1.48	59.0	2.32	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
	1.2500	69.012	2.7170	26.982	1.0623	26.721	1.0520	15.875	0.6250	4.3	0.17	3.2	0.13	57.7	55.0	7.95		14123A	14274	22.6	0.89	44.0	1.73	40.0	1.57	59.0	2.32	63.0	2.48	0.38	1.57	0.86	13.4	8.70	1.53
	1.2500	71.973	2.8336	27.000	1.0630	25.400	1.0000	21.443	0.8442	1.6	0.06	1.6	0.06	83.8	87.4	12.4		HM88644	HM88611	22.3	0.88	45.0	1.77	42.5	1.67	60.0	2.36	69.0	2.72	0.55	1.10	0.60	19.6	18.3	1.07
	1.2500	72.034	2.8360	30.162	1.1875	29.997	1.1810</																												