





Industrial Specification Grade Hart-Lock® Locking Devices

2-Pole, 3-Wire Grounding
NEMA L5-15


N-3 Locking Devices

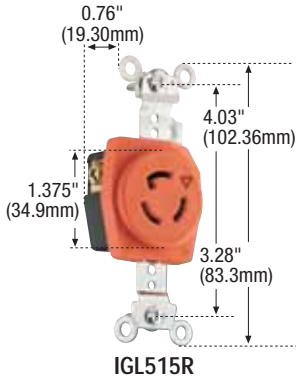

IGL515R

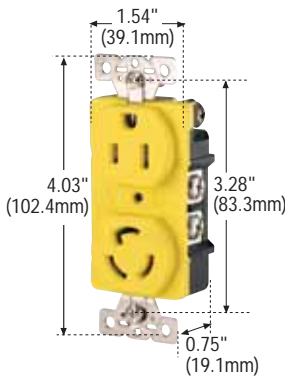

CR5792

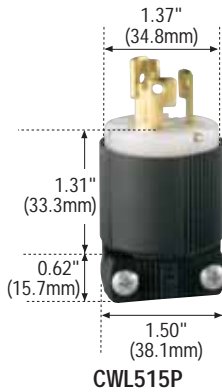

CWL515P



CWL515C

15A 125V NEMA L5-15 Industrial Locking Devices

Locking Receptacles

FEATURES

- Glass reinforced nylon body and face.
- One piece brass contacts offer superior performance and minimum heat rise.
- Back and side wire terminal clamps for easy secure wiring.
- Duplex receptacles feature a break off tab for split circuit wiring.

Rating A	V/AC	NEMA	Description	Color	Catalog No.	
					Single	Duplex
15	125	L5-15	Industrial	Black	CWL515R	4700
			Isolated Ground	Orange	IGL515R	IG4700
			Corrosion Resistant	Yellow	—	CR4700
			Combo Locking & SB	Black	—	5792
			Combo, Isolated Ground	Orange	—	IG5792*
			Combo, Corrosion Resistant	Yellow	—	CR5792

*Not CSA certified

Safety Grip™ Locking Plugs & Connectors

FEATURES

- Nylon construction.
- Neoprene gasket seals cord hole from dust and debris.
- Dual range cord grip for solid cord clamping.
- Back wire terminal clamps for easy secure wiring.
- Individual wiring compartments with tapered channel for easy insertion of wires.
- Clear cover over wiring compartments allows easy inspection of wiring terminations.

Rating A	V/AC	NEMA	Description/Cord Dia.	Color	Catalog No.	
					Plug	Connector
15	15	L5-15	Industrial: 0.250"-0.656" (6.4mm-16.7mm)	Black & White	CWL515P	CWL515C
			Angle: 0.300"-0.656" (7.62mm-16.7mm)	Black	4721BK	4731BK
				Black & White	CWL515PAN	CWL515CAN

TESTING & CODE COMPLIANCE

- Listed to UL 498, file no: E2369 (Receptacles).
- cUL Listed, file no: E3663 (Plugs & Connectors).
- UL Listed to Federal Spec. WC-596-F (Plugs & Connectors).
- CSA Certified to C22.2 no. 42 (file no. LR7087) except as noted.

MATERIAL CHARACTERISTICS

- Receptacles: Glass filled Nylon.
- Plugs & Connectors: Nylon.
- Environmental: Flammability per UL94: Receptacles: V0 rated; Plugs & Connectors: V2 rated.
- Temperature Rating: Receptacles: -40°C to 115°C. Plugs & Connectors: -40°C to 75°C.



5-15R

L5-15P

L5-15R