


Catalog No. 9T58K2878

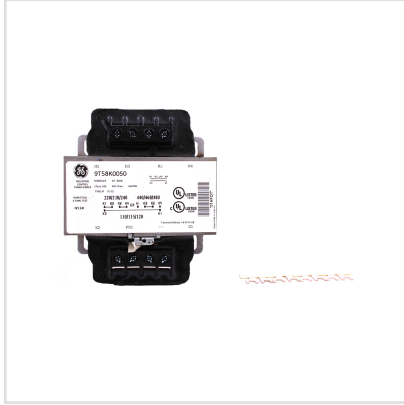

Description 0.25KVA CU 60HZ 1P 120X240-12/24 100C

UPC No 783173123638

Products > Transformers > Dry Type, Encapsulated Core & Coil > Control Power

Core and coil transformers for machine tool applications are used to provide voltage to control devices in applications where regulation and minimum space are important.

- Fully encapsulated coil is impervious to moisture
- Pressure plate terminals ensure secure connections
- Terminal board is anchored in the epoxy for greater reliability
- Wide variety of fusing options
- Rugged, high-impact plastic terminal board
- Full head #8 brass screws assure quick, easy terminations with maximum connection integrity
- Copper windings

- Flexible design allows input or output voltage to match any application
- CUL, CE, UL approvals
- Available fuse-clips offer simple, low-cost fusing with terminal block models and minimum space are important.

Specifications

Descriptors

Category	Control Power
GO Schedule	TQ

Specifications

Phase	1
PriVoltage	120x240
SecVoltage	12/24
KVA	0.25 KVA
Coil Material	CU
TempRise	100.0 °C
ElecShield	N
SubType	Control Terminal Block
Frequency	60 Hz
FrameSize	8200
Net Weight	7
TempClass	180.0 °C
AmbTemp	40.0 °C
InsulSys	IS-12
EnergyEfficiency	None
KFactor	K1
Enclosure Type	None
Net Weight	7
Sound	Std

Specifications

GSA Compliance	Yes
----------------	-----

Classifications

UL	Yes
----	-----

cUL	Yes
-----	-----

CE	No
----	----

Dimensions

Width	3.8 in
-------	--------

Depth	5.1 in
-------	--------

Height	3.3 in
--------	--------

Publications

Title	Publication No.	Publication Type
Transformer Outline Drawing Outline drawing in .pdf format.	303B947AAP08200	Drawings-Outline and Dimensional

Additional Documentation: Visit our [Publication Library](#) to find technical documentation, time current curves, CSI Specifications and promotional literature.