


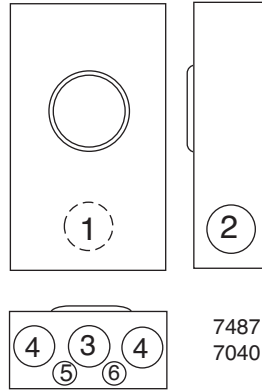

U7487-RL-QG-CAPL


 7487  
7040


U7040-XL-TG

**125 AMP-4 & 5 TERMINAL-RINGLESS-OVERHEAD / UNDERGROUND-1Ø3W**

NO OF TERM	UTILITY	CATALOG NUMBER	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
4	DUKE, SCE&G PROGRESS EN	U7487-RL-QG-CAPL	H.O.	#6-2/0	#6-2/0	NONE	3 <sup>5</sup> / <sub>16</sub>	8	11 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>2</sub>	2	1 <sup>1</sup> / <sub>4</sub>	—	1 <sup>1</sup> / <sub>4</sub>
5	DUKE, SCE&G PROGRESS EN	U7487-RL-TG-5T	H.O.	#6-2/0	#6-2/0	NONE	3 <sup>5</sup> / <sub>16</sub>	8	11 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>2</sub>	2	1 <sup>1</sup> / <sub>4</sub>	—	1 <sup>1</sup> / <sub>4</sub>

**HUBS:** For proper hub selection see the hub suffix chart on the accessory page.

**FIFTH TERMINAL:** For field mounted fifth terminal order catalog number **5T8K2**.

**CONNECTORS:** Extruded aluminum connectors are tin plated. Units are supplied with duplex neutral and quadplex ground.

**200 AMP-4 & 5 TERMINAL-RINGLESS-OVERHEAD / UNDERGROUND-1Ø3W**

NO OF TERM	UTILITY	CATALOG NUMBER	HUB	CONNECTORS CU/AL		BY-PASS	DIMENSIONS			CONCENTRIC K.O.'S					
				LINE	LOAD		D"	W"	H"	1	2	3	4	5	6
4	DUKE, SCE&G	U7040-XL-TG	C.P.	#6-350	#6-350	NONE	4 <sup>1</sup> / <sub>8</sub>	11	14 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>
5	DUKE, SCE&G	U7040-XL-TG-5T*	C.P.	#6-350	#6-350	NONE	4 <sup>1</sup> / <sub>8</sub>	11	14 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	2 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub> , 1 <sup>1</sup> / <sub>2</sub>	1 <sup>1</sup> / <sub>4</sub>

**HUBS:** For proper hub selection see the hub suffix chart on the accessory page.

**\*FIFTH TERMINAL:** For field mounted fifth terminal, order catalog number **K5T** for U7040 – must be used with a #10 white wire.

**CONNECTORS:** Extruded aluminum connectors are tin plated. Units are supplied with duplex neutral and triplex ground.

*Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment in this catalog.*