

# Cable Cutters

## Ratcheting Cable Cutters


- High-leverage ratchet mechanism for single-handed cutting of copper and aluminum cables, leaving no burrs or sharp edges.
- Two-step ratchet mechanism requires fewer strokes per cut.
- Quick release lever opens blades easily in every cutting position. (Allows removal of the cable before completion of cut).
- Precision ratcheting mechanism holds cable tight and allows rapid, straight cuts with minimum effort.
- Hardened steel cutting blades for lasting strength and sharpness.
- Plastic covered handles with hand guards for comfort and firm grip.
- Locking lever keeps handles closed for easy transport; fits in a toolbox or bag.
- Not designed for cutting steel or ACSR.
- Do NOT use to cut steel or ACSR.
- One-year warranty.



63060



63711

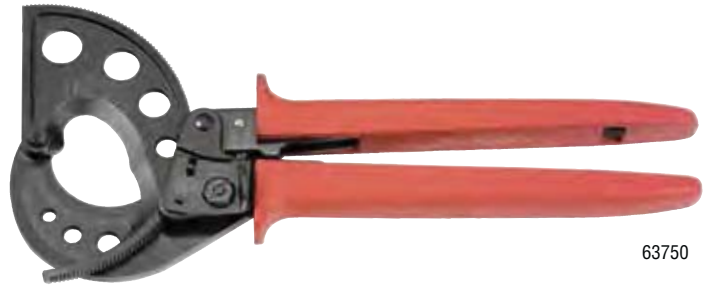

63750

MCM Maximum Cable Capacity

Cat. No.	Copper	Aluminum	ACSR	Communication Cable	Overall Length	Handle Color	Weight
63060	400 MCM (185 mm <sup>2</sup> )	600 MCM (300 mm <sup>2</sup> )	—	1-1/8" (28 mm)	10-1/4" (260 mm)	red	1.32 lbs.
63711	600 MCM (300 mm <sup>2</sup> )	750 MCM (400 mm <sup>2</sup> )	—	1-1/8" (28 mm)	11-1/2" (292 mm)	red	2.00 lbs.
63750	1000 MCM (500 mm <sup>2</sup> ) Frequent Use: 750 MCM (400 mm <sup>2</sup> )	1000 MCM (500 mm <sup>2</sup> ) Frequent Use: 750 MCM (400 mm <sup>2</sup> )	—	2-1/16" (52 mm)	12-1/8" (308 mm)	red	1.76 lbs.

## ACSR Ratcheting Cable Cutter

- High-leverage ratcheting mechanism for easier cutting.
- At a length of just under 14" tool can be carried in a tool pouch (Cat. No. 63607).
- Cleanly cuts 336 MCM Linnet ACSR and 2/0 triplex steel messenger cable (Cat. No. 63607).
- Cutting inserts are easily replaced by simply removing 3 screws per blade (Cat. No. 63800ACSR).
- Tool can be locked when not in use.
- Plastic covered handles with hand guards for comfort and firm grip.



63607



63800ACSR

MCM Maximum Cable Capacity

Cat. No.	ACSR	Stranded Aluminum & Copper	Solid Copper	Guy Strand	Length	Handle Color	Weight
63607	336 MCM (170 mm <sup>2</sup> )	600 MCM (300 mm <sup>2</sup> )	400 MCM (185 mm <sup>2</sup> )	—	10-1/4" (260 mm)	yellow	1.50 lbs.
63800ACSR	477 MCM (273 mm <sup>2</sup> )	1-1/4" (32 mm)	1" (25 mm)	1/2" (13 mm)	13-3/4" (349 mm)	red	3.20 lbs.

Replacement Cutting Inserts (with set of 6 screws)	Fits Klein Cat. No.
63858	63800ACSR

All dimensions are in inches and (millimeters).

