


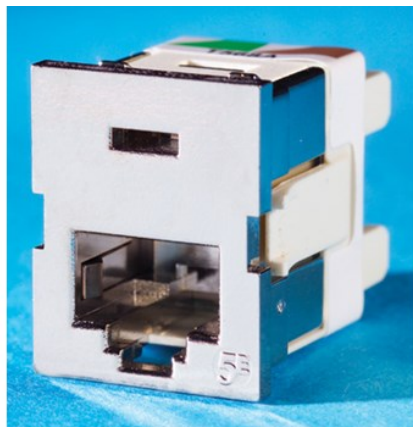

CLARITY 5E SHIELDED TRACJACK, T568A/B, 180 DEGREE

OR-TJS5E00 | [Ortronics](#)

FEATURES & BENEFITS

Clarity^{5E} Shielded TracJack, T568A/B, 180°



PRODUCT
ENVIRONMENTAL PROFILE

- ETL Verified to Category 5e component standard
- Center tuned design
- Easy lace IDC housing
- Easy to follow universal wiring label
- Front removable
- Standard TracJack footprint
- Icon compatible, with 5E marking on jack face
- Dual reactance technology
- RoHS compliant

SPECIFICATIONS

GENERAL INFO

Category Performance Application: Cat5e/FTP Shielded

Color: Metalized plastic

Footprint: TracJack

Performance Category: Cat 5e component compliant

LISTING AGENCIES/THIRD PARTY CERTIFICATIONS

RoHS: Yes

CUL Listing No: E131600

ETL Listing No: 3030592-032A

ETL Listed: Yes

FCC Standard: Yes

UL Listing No: E131600

UL Standard: Yes

CONSTRUCTION INFORMATION

Component 1: TracJack Outer shield

Component 2: Plastic TracJack Housing

Component 3: Array of eight modular dual reactance contacts

Component 4: IDC contacts (Low noise)

Component 5: Printed circuit board

Finish Plating 1: Nickle plating 80 micro inches

Finish Plating 3: Nickel plating and a minimum of 50 micro inches of selective gold plating in contact area

Finish Plating 4: Nickel plating with tin over plate

Material 1: Formed copper alloy

Material 2: High Impact Thermo Plastic ABS 94V-O

Material 3: Beryllium copper

Material 4: Phosphor bronze

Material 5: Two-sided FR-4 epoxy resin/glass base with solder mask

DIMENSIONS

Depth (Metric): 38.86 mm

Height (Metric): 23.37 mm

Height (US): .92"

Width (Metric): 18.54 mm

TECHNICAL INFORMATION

Category Rating: Cat 5e component compliant

Performance Rating: Cat5e

Wire Gauge: 22-26 AWG

BUY AMERICAN ACT COMPLIANCE

Country Of Origin: MEXICO

Buy American Act Status: Trade Agreement Act Compliant

